

VT6CBB**VT7QEDC****VT6CCB****VT67DBB****VT6DCB****VT67DCB****VT6DCC****VT67DCC****VT6DDCS****VT67DDCS****VT6EDC****VT67EDB****VT6DCCM****VT67EDC****VT6EDC*****VT7DBB****VT7QDCB****VT7DBB****VT7QDCC****VT7DDB****VT7EDB****TRIPLÉ VANE PUMPS**

VT6CBB - 022 - B09 - B02 - 1 R 00 - B 1 01 *

Series ———— **Modifications**

Cam ring for "P1"

Volumetric displacement cm /rev (in /rev)

*00³/B0³ = 10.8 (0.66) 015/B15 = 50.5 (³.08)
 005/B05 = 17.2 (1.05) 017/B17 = 58.³ (³.56)
 006/B06 = 21.³ (1.³0) 020/B20 = 6³.8 (³.89)
 008/B08 = 26.4 (1.61) 022/B22 = 70.³ (4.29)
 010/B10 = ³4.1 (2.08) 025/B25 = 79.³ (4.84)
 012/B12 = ³7.1 (2.26) 028/B28 = 88.8 (5.42)
 014/B14 = 46.0 (2.81) 0³1/B³1 = 100.0 (6.10)

*0³ - Uni - directional 'B' - Bi - directional

Cam ring for "P2" & "P3"

Volumetric displacement cm /rev (in /rev)

B02 = 6.5 (0.³9)
 B0³ = 8.8 (0.54)
 B04 = 12.8 (0.78)
 B06 = 20.7 (1.26)
 B08 = 26.1 (1.59)
 B09 = ³1.5 (1.92)
 B12 = ³9.7 (2.42)

Type of Shaft

1 = Keyed (no SAE)
 2 = Keyed (SAE BB)
³ = Splined (SAE BB)
 5 = Splined (SAE B)
 E = Splined

Port connections

CODE		S = 2½" SAE 4-Bolt Pad.		
UNC	METRIC	P1	P2	P3
01	W0	1" SAE 4 bolt Pad.	¾" SAE 4 bolt Pad.	SAE 8,¾" 16 UNF-2B O'ring Boss
11	W1			¾" SAE 4 bolt Pad.
02	W2	SAE 16,1 5/16" 12 UNF-2B O'ring Boss	SAE 12,1 1/16" 12 UNF-2B O'ring Boss	SAE 8,¾" 16 UNF-2B O'ring Boss

Seal class

1 - S1 (for mineral oil)
 4 - S4 (for fire resistant fluids)
 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4)

00 - standard

Direction of rotation (view on shaft end)

R - clockwise
 L - counter-clockwise


OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.26	8.4
	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
	028 ¹⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	65.04	48.5
	031 ¹⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	72.95	54.4
P2 & P3				p = 0 bar (0 psi)		p = 100 bar (1500 psi)		p = 240 bar (3000 psi)		p = 7 bar (100 psi)		p = 100 bar (1500 psi)		p = 240 bar (3000 psi)	
	B02	0.39	6.5	2.64	10.0	2.11	8.0	-	-	0.53	0.4	2.81	2.1	-	-
	B03	0.54	8.8	3.49	13.2	2.96	11.2	2.43	9.2	0.67	0.5	3.62	2.7	7.11	5.3
	B04	0.78	12.8	5.08	19.2	4.55	17.2	4.02	15.2	0.93	0.7	5.23	3.9	10.06	7.5
	B06	1.26	20.7	8.20	31.0	7.67	29.0	7.14	27.0	1.07	0.8	8.05	6.0	12.34	9.2
	B08	1.59	26.1	10.34	39.1	9.78	37.0	9.25	35.0	1.34	1.0	10.05	7.5	15.69	11.7
	B09	1.92	31.5	12.48	47.2	11.93	45.1	11.42	43.2	1.47	1.1	11.94	8.9	23.60	17.6
	B12	2.42	39.7	15.74	59.5	15.18	57.4	14.68	55.5	1.74	1.3	15.02	11.2	29.50	22.0

1) 028-031 = 210 bar (3000 psi) max. int.


- Not to use because internal leakage greater than 50% of theoretical flow.

INTERNAL LEAKAGE (TYPICAL)

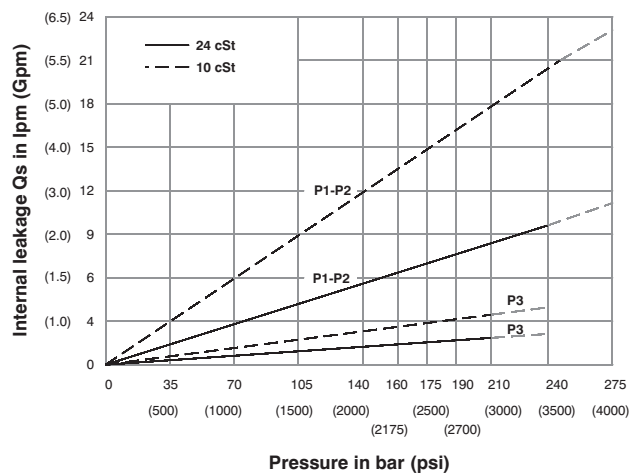


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

HYDROMECHANICAL POWER LOSS (TYPICAL)

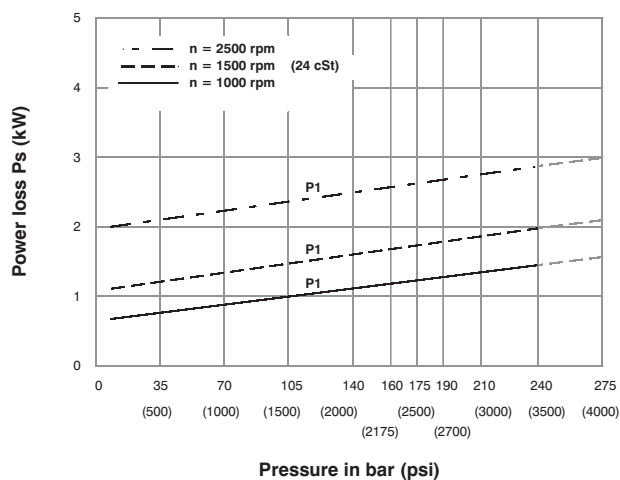



Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

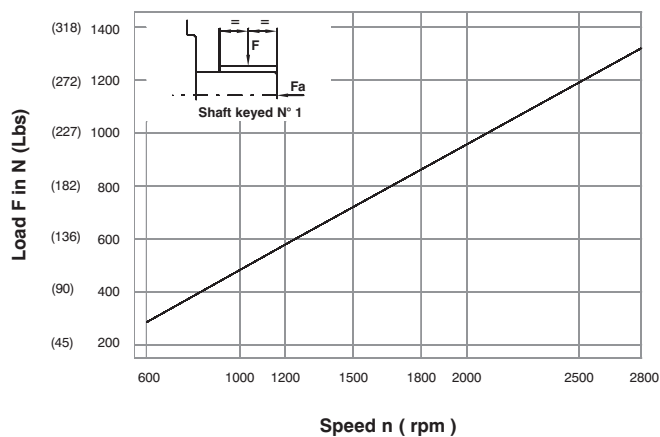


Maximum axial load permissible $F_a = 800$ N (180 Lbs)

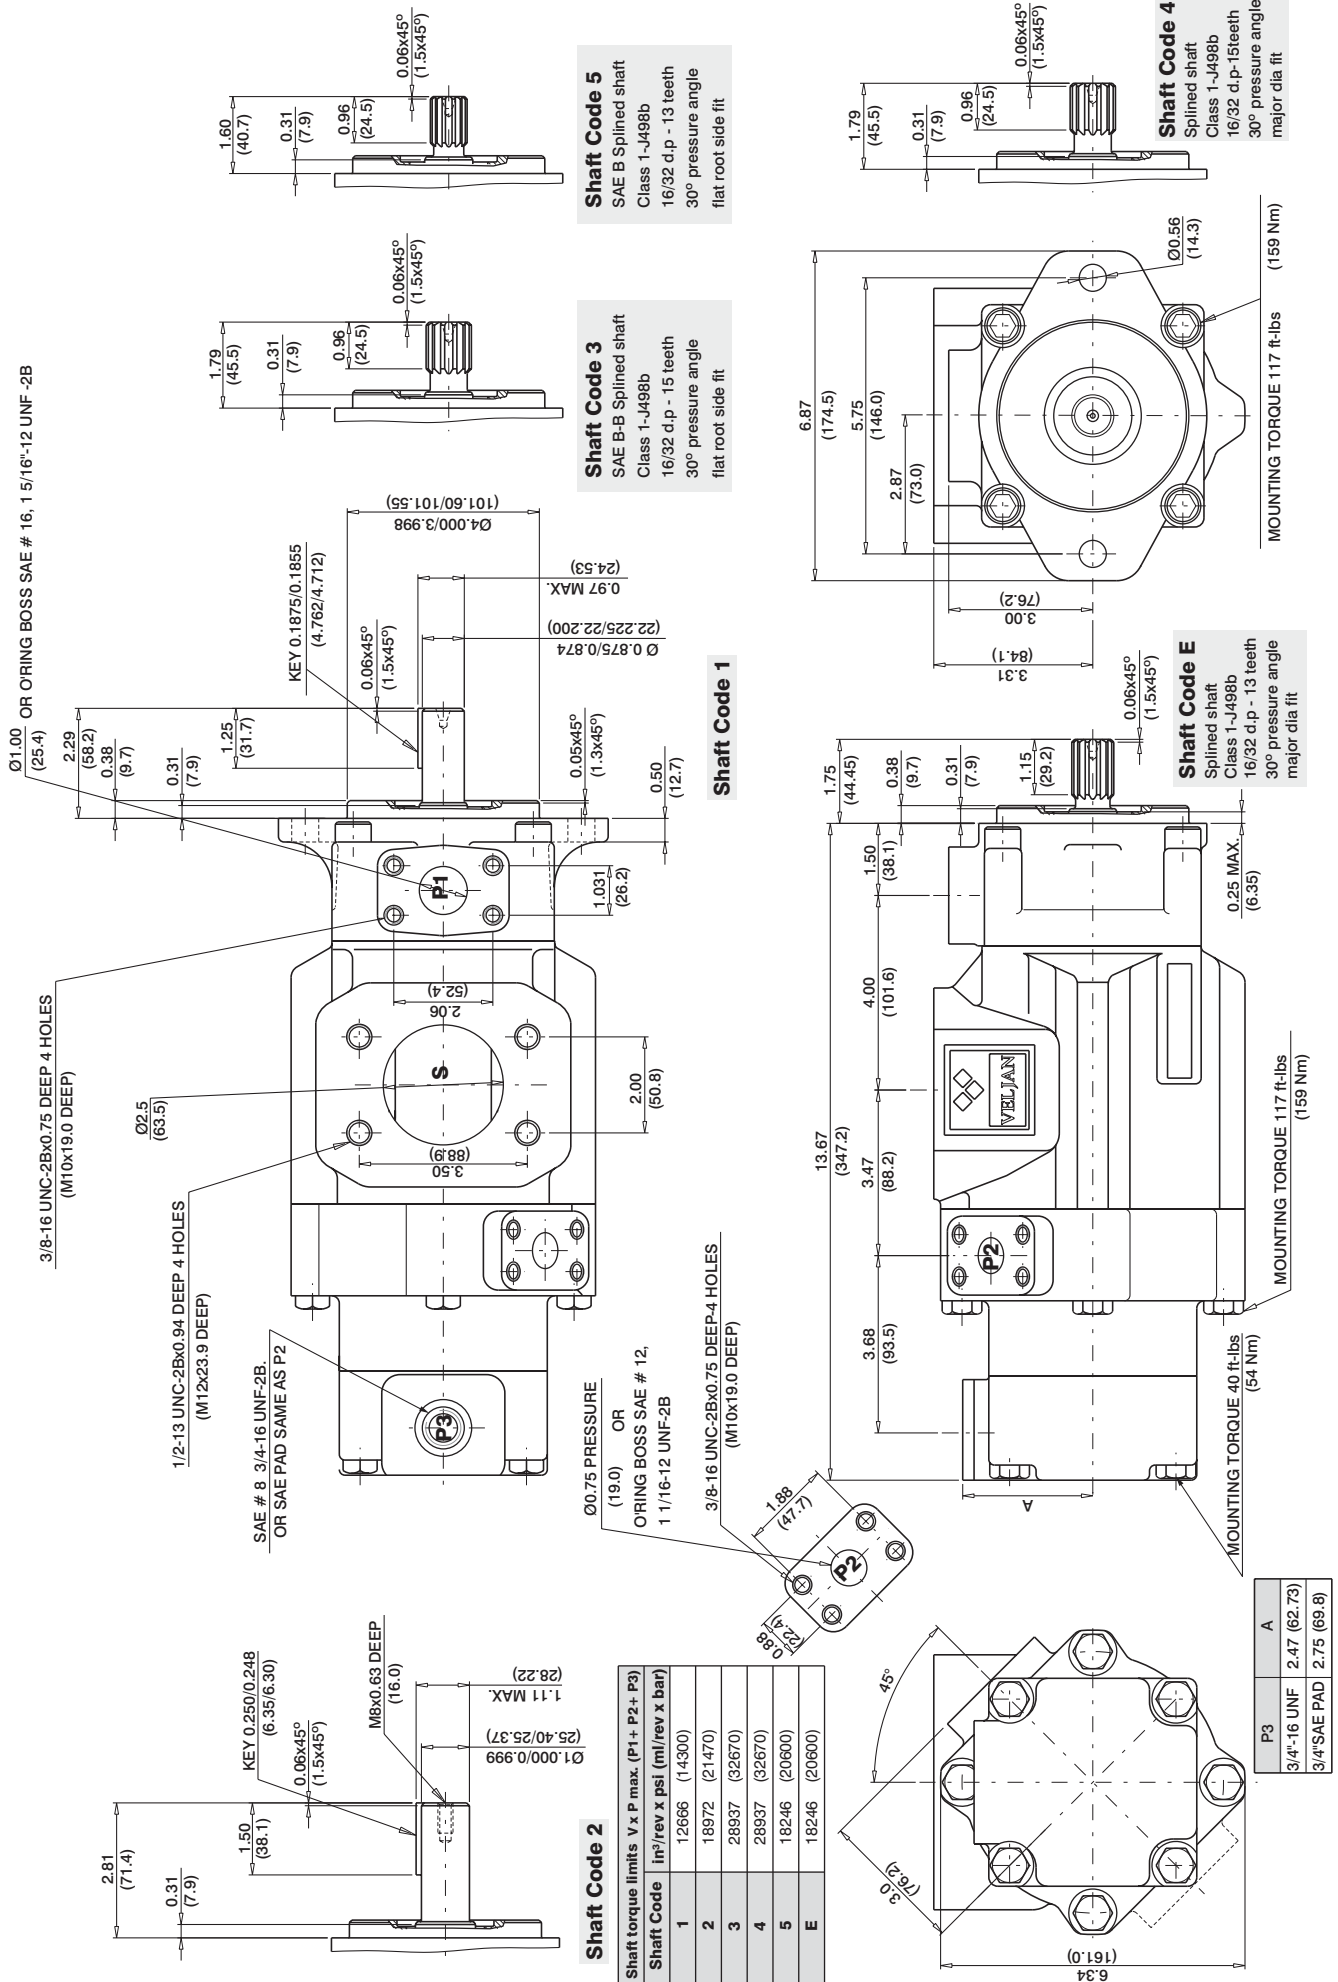

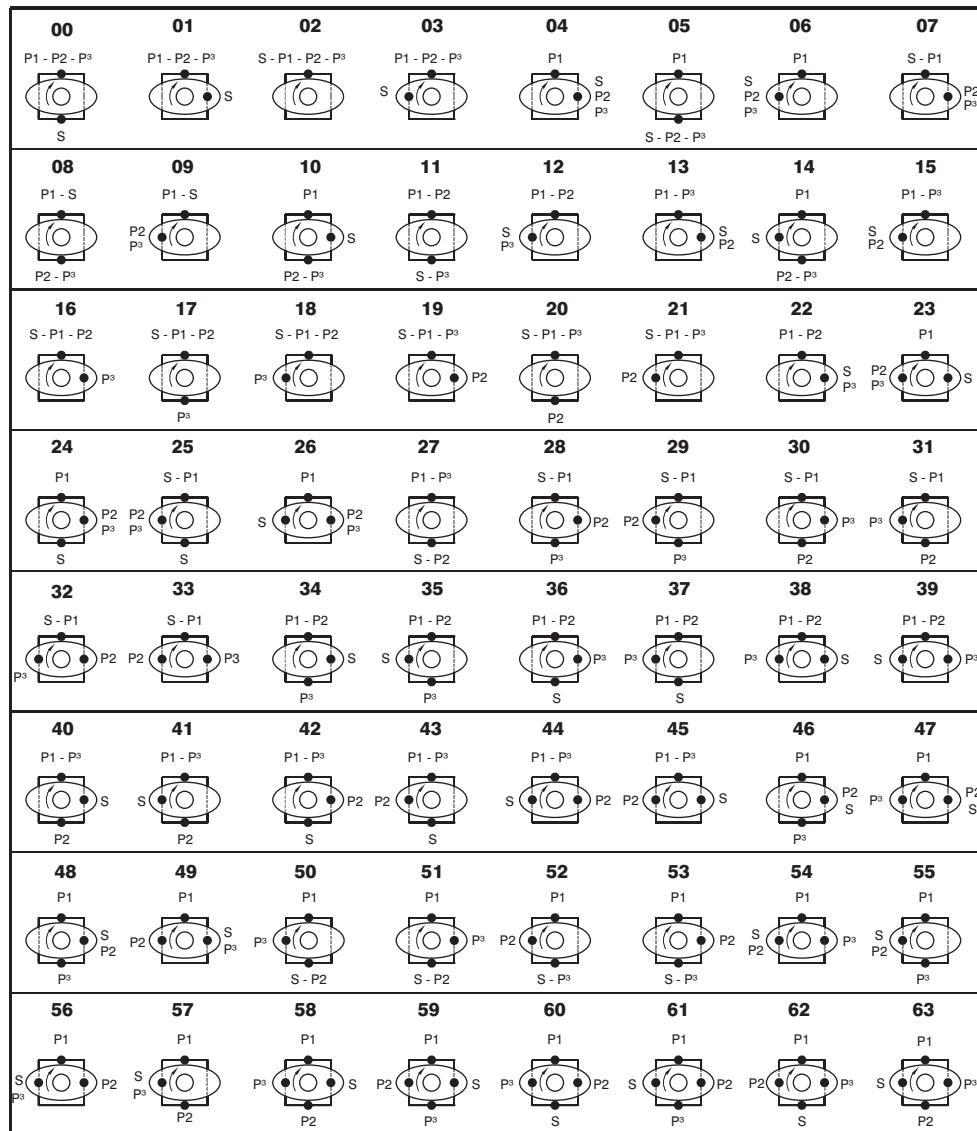

VT6DCC-VT6DDCS - VT6EDC
VT7DBB/VT7DBBS-VT7QDCC-VT7QDCB-VT7ddb/VT7ddbS-
VT7EDB/VT7EDBS-VT7QEDC/VT7QEDCS
VT67DBB-VT67DCB-VT67EDB-VT67EDC-VT67DDCS-VT67DCC

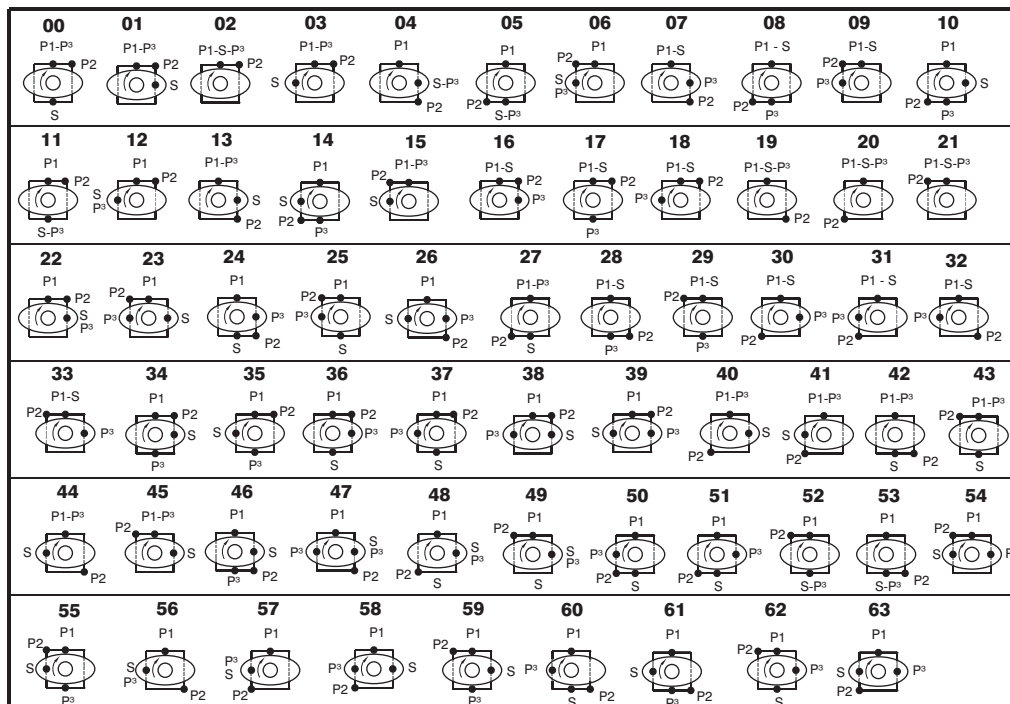

VT6DCB - VT6CBB




S	P2	P3				P2	P3			
		02	16	17	18		20	30	08	31
		19	07	28	32		21	33	29	09
		01	22	32	38		40	48	10	58
		13	04	46	47		45	49	59	23
		00	36	11	37		27	51	05	50
		42	24	53	60		43	62	52	25
		03	39	35	12		41	63	14	57
		44	26	61	56		15	54	55	06

VT6DCC-VT6DDCS - VT6EDC
 VT7DBB/VT7DBBS-VT7QDCC-VT7QDCB-VT7DDB/VT7DBS-
 VT7EDB/VT7EDBS-VT7QEDC/VT7QEDCS
 VT7DBB-VT7DCB-VT7EDB

00 P1-P2 P3 S	01 P1-P2 P3 S	02 P1-S-P2 P3 S	03 P1-P2 P3 S	04 P1-P2 P3 S	05 P1-P2 P3 S	06 P1-S-P2 P3 S	07 P1-P2 P3 S	08 P1-P2 P3 S	09 P1-P2 P3 S	10 P1-S-P2 P3 S	11 P1-P2 P3 S
12 P1-P2 P3 S	13 P1-P2 P3 S	14 P1-S-P2 P3 S	15 P1-P2 P3 S	16 P1-S P3 P2	17 P1-S P3 P2	18 P1-S P3 P2	19 P1-S P3 P2	20 P1-S P3 P2	21 P1-S P3 P2	22 P1-S P3 P2	23 P1-S P3 P2
24 P1-S P3 P2	25 P1-S P3 P2	26 P1-S P3 P2	27 P1-S P3 P2	28 P1 P3 S-P2	29 P1 P3 S-P2	30 P1 P3 S-P2	31 P1 P3 S-P2	32 P1 P3 S-P2	33 P1 P3 S-P2	34 P1 P3 S-P2	35 P1 P3 S-P2
36 P1 P3 S	37 P1 P3 S	38 P1 P3 S	39 P1 P3 S	40 P1 P3 S	41 P1 P3 S	42 P1 P3 S	43 P1 P3 S	44 P1 P3 S	45 P1 P3 S	46 P1 P3 S	47 P1 P3 S
48 P1 P3 S	49 P1 P3 S	50 P1 P3 S	51 P1 P3 S	52 P1 P3 S	53 P1 P3 S	54 P1 P3 S	55 P1 P3 S	56 P1 P3 S	57 P1 P3 S	58 P1 P3 S	59 P1 P3 S
60 P1 P3 S	61 P1 P3 S	62 P1 P3 S	63 P1 P3 S								

VT6CCB

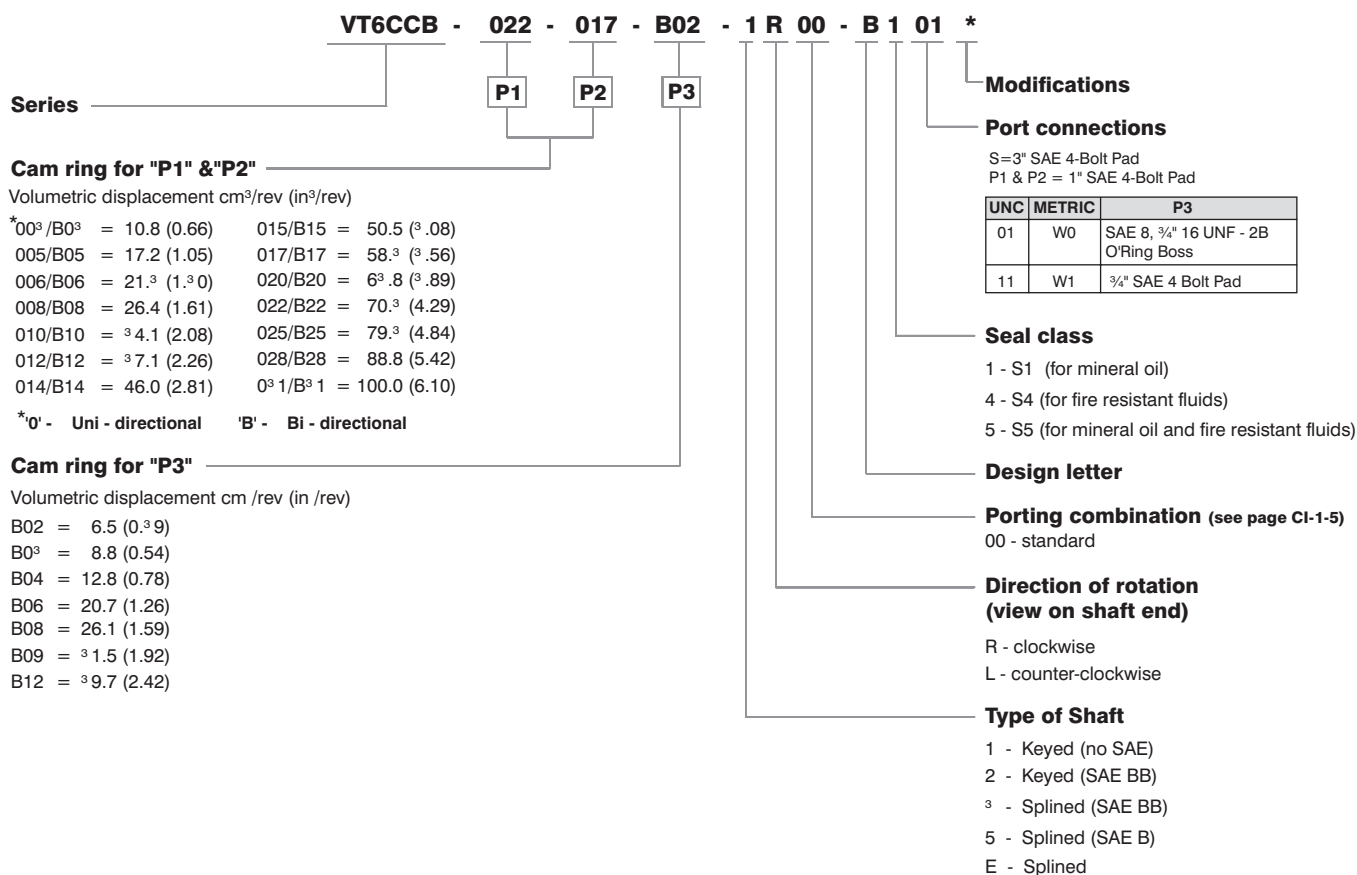

TP


OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1 & P2	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.26	8.4
	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
	028 ¹⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	75.04	55.5
	031 ¹⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	84.95	62.4
P3				p = 0 bar (0 psi)		p = 100 bar (1500 psi)		p = 240 bar (3000 psi)		p = 7 bar (100 psi)		p = 100 bar (1500 psi)		p = 240 bar (3000 psi)	
	B02	0.39	6.5	2.64	10.0	2.11	8.0	-	-	0.53	0.4	2.81	2.1	-	-
	B03	0.54	8.8	3.49	13.2	2.96	11.2	2.43	9.2	0.67	0.5	3.62	2.7	7.11	5.3
	B04	0.78	12.8	5.08	19.2	4.55	17.2	4.02	15.2	0.93	0.7	5.23	3.9	10.06	7.5
	B06	1.26	20.7	8.20	31.0	7.67	29.0	7.14	27.0	1.07	0.8	8.05	6.0	12.34	9.2
	B08	1.59	26.1	10.34	39.1	9.78	37.0	9.25	35.0	1.34	1.0	10.05	7.5	15.69	11.7
	B09	1.92	31.5	12.48	47.2	11.93	45.1	11.42	43.2	1.47	1.1	11.94	8.9	23.60	17.6
	B12	2.42	39.7	15.74	59.5	15.18	57.4	14.68	55.5	1.74	1.3	15.02	11.2	29.50	22.0

1) 028-031 = 210 bar (3000 psi) max. int.


- Not to use because internal leakage greater than 50% of theoretical flow.

INTERNAL LEAKAGE (TYPICAL)

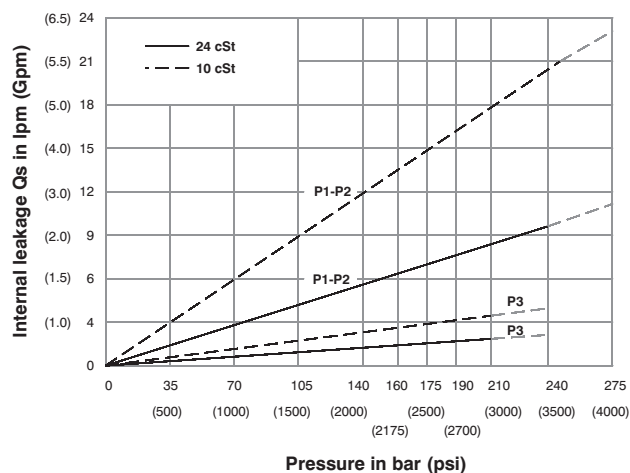


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

HYDROMECHANICAL POWER LOSS (TYPICAL)


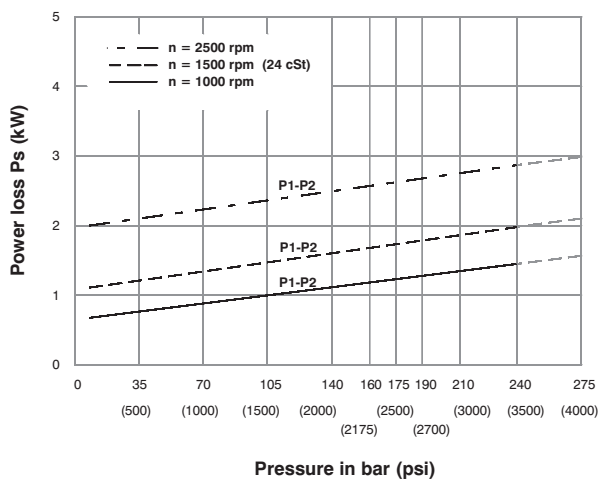


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

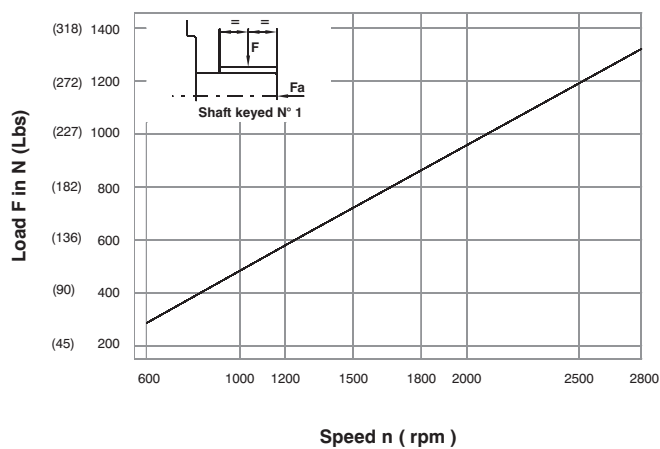

Maximum axial load permissible $F_a = 800$ N (180 Lbs)



VT6DCB - 038 - 017 - B02 - 1 R 00 - B 1 01 *

Series _____

Cam ring for "P2"
Volumetric displacement cm³/rev (in³/rev)
 *014/B14 = 47.6 (2.90) 0³5/B³5 = 111.0 (6.77)
 017/B17 = 58.2 (3.55) 0³8/B³8 = 120.3 (7.34)
 020/B20 = 66.0 (4.03) 042/B42 = 136.0 (8.30)
 024/B24 = 79.5 (4.85) 045/B45 = 145.7 (8.89)
 028/B28 = 89.7 (5.47) 050/B50 = 158.0 (9.64)
 0³1/B³1 = 98.3 (6.00) 061/B61 = 190.5 (11.62)
 *0' - Uni - directional 'B' - Bi - directional

Cam ring for "P2"
Volumetric displacement cm³/rev (in³/rev)
 *00³/B0³ = 10.8 (0.66) 015/B15 = 50.5 (3.08)
 005/B05 = 17.2 (1.05) 017/B17 = 58.3 (3.56)
 006/B06 = 21.3 (1.30) 020/B20 = 63.8 (3.89)
 008/B08 = 26.4 (1.61) 022/B22 = 70.3 (4.29)
 010/B10 = 34.1 (2.08) 025/B25 = 79.3 (4.84)
 012/B12 = 37.1 (2.26) 028/B28 = 88.8 (5.42)
 014/B14 = 46.0 (2.81) 0³1/B³1 = 100.0 (6.10)
 *0' - Uni - directional 'B' - Bi - directional

Cam ring for "P3"
Volumetric displacement cm³/rev (in³/rev)
 B02 = 6.5 (0.39)
 B03 = 8.8 (0.54)
 B04 = 12.8 (0.78)
 B06 = 20.7 (1.26)
 B08 = 26.1 (1.59)
 B09 = 31.5 (1.92)
 B12 = 39.7 (2.42)

Modifications

Port connections
S=3" SAE 4-Bolt Pad
P1 = 1 1/4" & P2 = 1" SAE 4-Bolt Pad

UNC	METRIC	P3
01	W0	SAE 8, 3/4" 16 UNF - 2B O'Ring Boss
11	W1	3/4" SAE 4 Bolt Pad

Seal class
 1 - S1(for mineral oil)
 4 - S4(for fire resistant fluids)
 5 - S5(for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4)
00 - standard

Direction of rotation (view on shaft end)
 R - clockwise
 L - counter-clockwise

Type of Shaft
 1 - Keyed (no SAE)
 2 - Keyed (SAE CC)
 3 - Splined (SAE C)
 E - Splined (SAE C)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)	p = 140 bar (2000 psi)	p = 240 bar (3500 psi)	p = 7 bar (100 psi)	p = 140 bar (2000 psi)	p = 240 bar (3500 psi)	p = 0 bar (0 psi)	p = 100 bar (1500 psi)	p = 240 bar (3000 psi)	p = 7 bar (100 psi)	p = 100 bar (1500 psi)	p = 240 bar (3000 psi)
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	014	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	020	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	024	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	028	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	031	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	035	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	038	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	042 ¹⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	045 ¹⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	050 ^{1,2)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
	061 ^{1,3)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
P2	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.22	8.4
	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
P3	028 ²⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	65.04	48.5
	031 ²⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	72.95	54.4
	B02	0.39	6.5	2.64	10.0	2.11	8.0	-	-	0.53	0.4	2.81	2.1	-	-
	B03	0.54	8.8	3.49	13.2	2.96	11.2	2.43	9.2	0.67	0.5	3.62	2.7	7.11	5.3
	B04	0.78	12.8	5.08	19.2	4.55	17.2	4.02	15.2	0.93	0.7	5.23	3.9	10.06	7.5
	B06	1.26	20.7	8.20	31.0	7.67	29.0	7.14	27.0	1.07	0.8	8.05	6.0	12.34	9.2
	B08	1.59	26.1	10.34	39.1	9.78	37.0	9.25	35.0	1.34	1.0	10.05	7.5	15.69	11.7
	B09	1.92	31.5	12.48	47.2	11.93	45.1	11.42	43.2	1.47	1.1	11.94	8.9	23.60	17.6
	B12	2.42	39.7	15.74	59.5	15.18	57.4	14.68	55.5	1.74	1.3	15.02	11.2	29.50	22.0


1) 042-045-050-061=2200 RPM max.

2) 028-031- 050=210 bar (3000 psi) max. int.

3) 061 = 120 bar (1740 psi) max. int, 061 = 80 bar (1160 psi) cont.


- Not to use because internal leakage greater than 50% of theoretical flow.

INTERNAL LEAKAGE (TYPICAL)

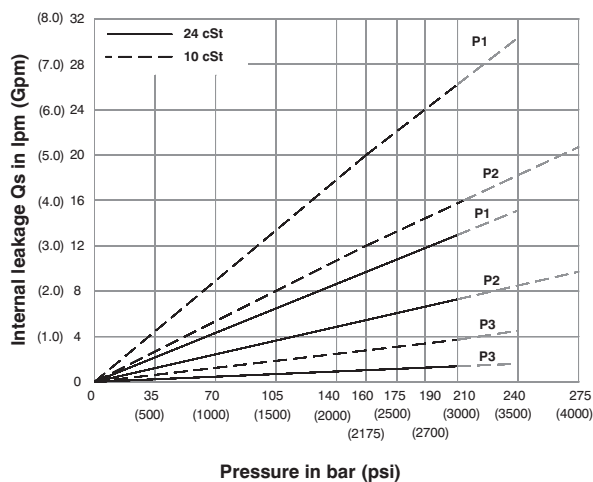


Don not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

HYDROMECAHNICAL POWER LOSS (TYPICAL)

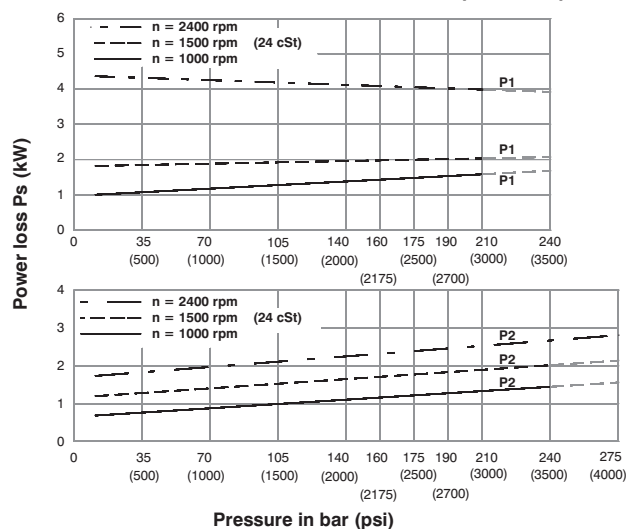



Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

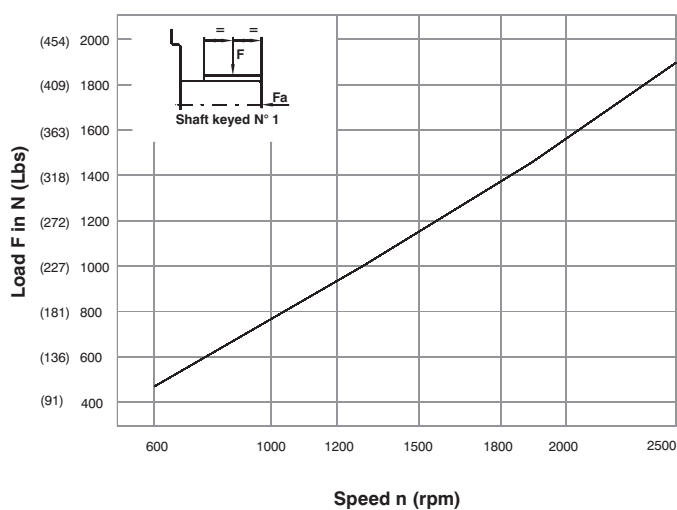

Maximum permissible axial load $F_a = 1200$ N (270 Lbs)

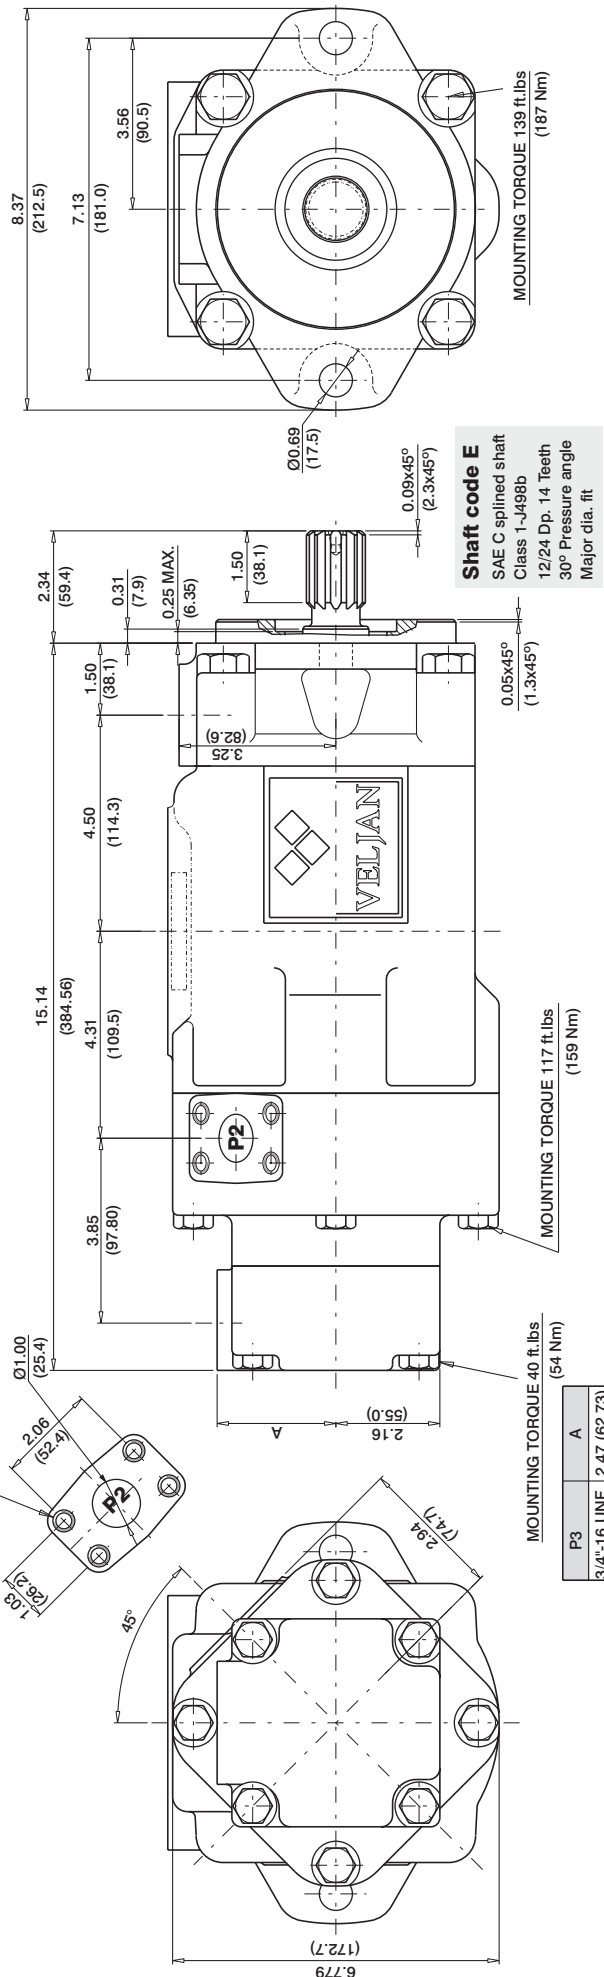

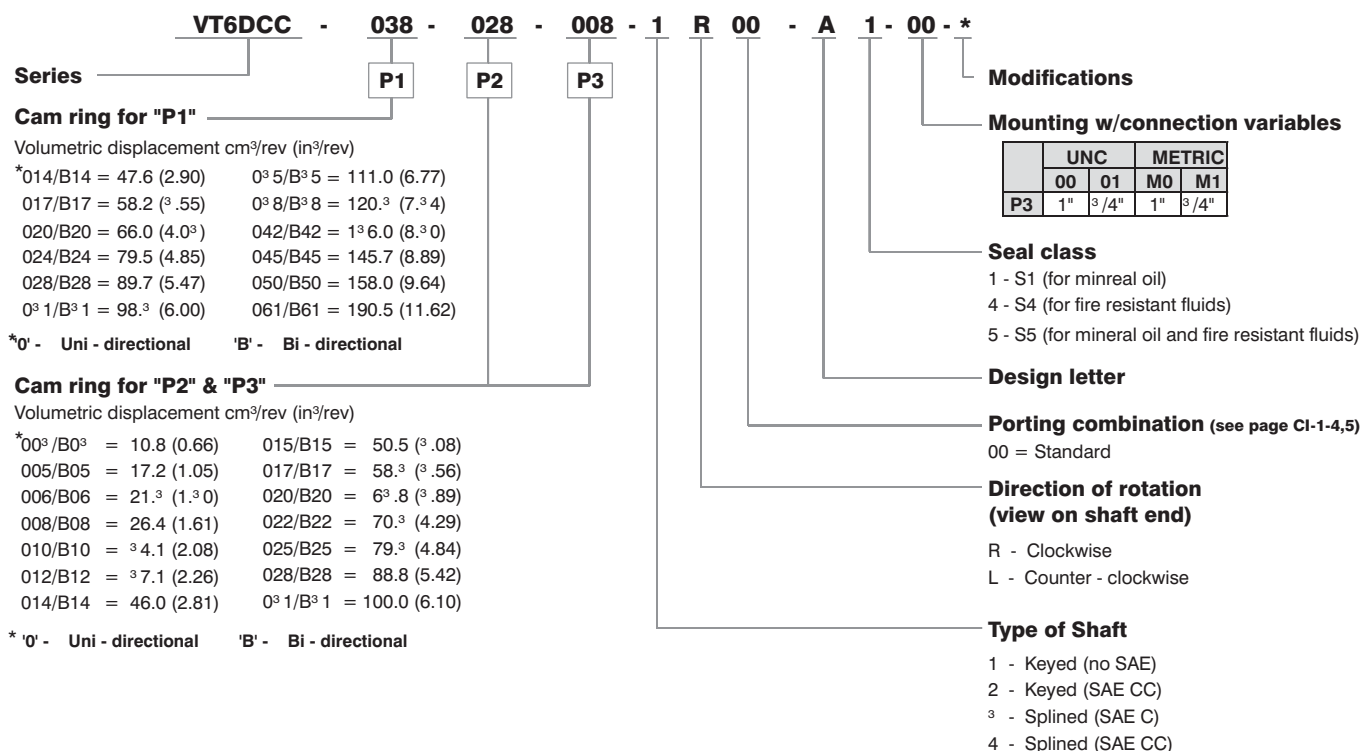

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
		in ³ /rev	cm ³ /rev	p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	014	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	020	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	024	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	028	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	031	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	035	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	038	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	042 ¹⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	045 ¹⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	050 ^{1,2)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
P2 & P3	061 ^{1,3)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.22	8.4
	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
	028 ²⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	65.04	48.5
	031 ²⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	72.95	54.4

1) 042-045-050-061=2200 RPM max.

2) 028-031- 050=210 bar (3000 psi) max. int.


3) 061 = 120 bar (1740 psi) max. int, 061 = 80 bar (1160 psi) cont.

INTERNAL LEAKAGE (TYPICAL)

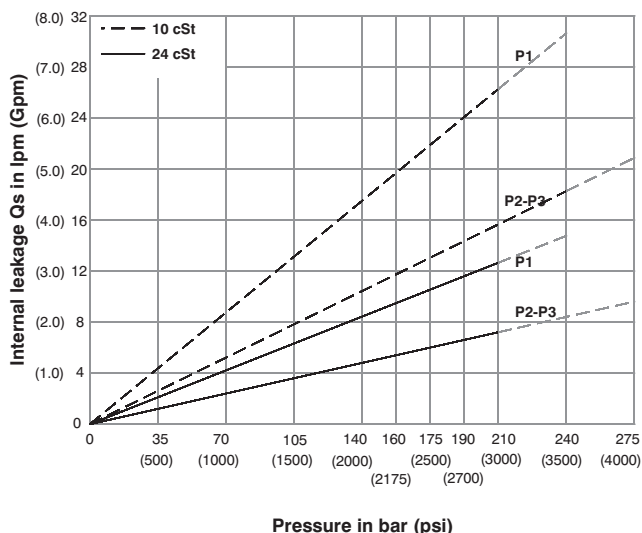


Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

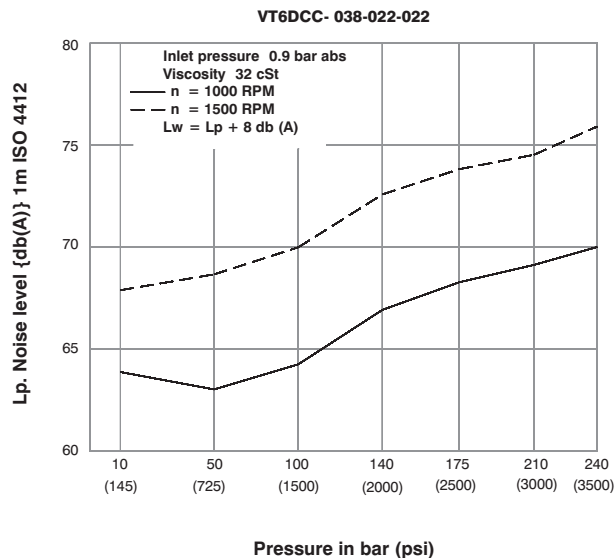


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECAHNNICAL POWER LOSS (TYPICAL)

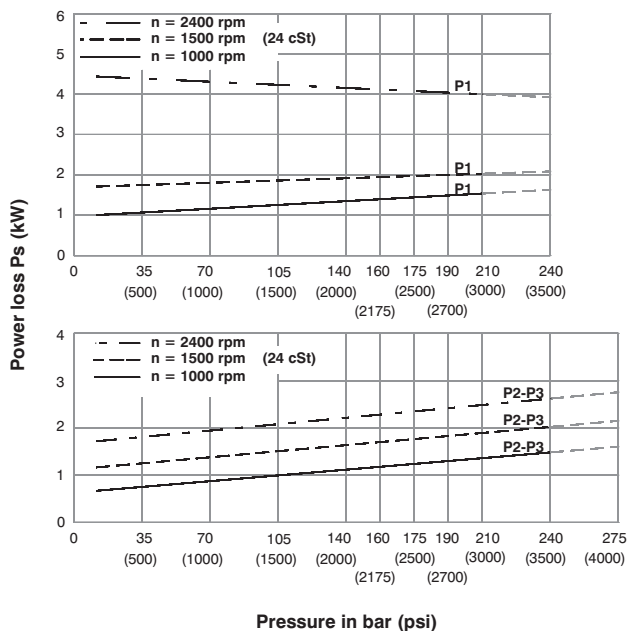

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

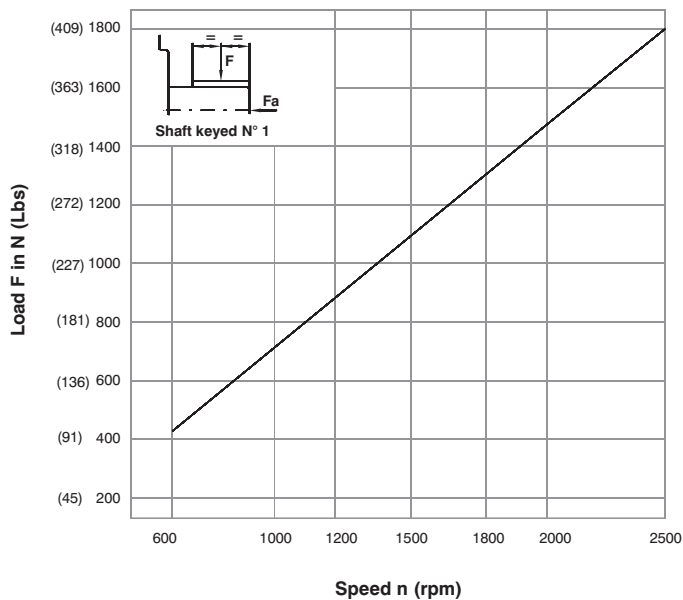

Maximum axial load permissible $F_a = 1200 \text{ N (270 Lbs)}$



VT6DDCS - 038 - 038 - 028 - 1 R 00 - B 1 - 00 -

Series

SAE C 6 bolts
Mounting flange J744 SAE C

Cam ring for "P1" & "P2"

Volumetric displacement cm³/rev (in³/rev)

*014/B14 = 47.6 (2.90)	0 ³ 5/B ³ 5 = 111.0 (6.77)
017/B17 = 58.2 (3.55)	0 ³ 8/B ³ 8 = 120.3 (7.34)
020/B20 = 66.0 (4.03)	042/B42 = 136.0 (8.30)
024/B24 = 79.5 (4.85)	045/B45 = 145.7 (8.89)
028/B28 = 89.7 (5.47)	050/B50 = 158.0 (9.64)
031/B31 = 98.3 (6.00)	061/B61 = 190.5 (11.62)

*'0' - Uni - directional 'B' - Bi - directional

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

*003/B03 = 10.8 (0.66)	015/B15 = 50.5 (3.08)
005/B05 = 17.2 (1.05)	017/B17 = 58.3 (3.56)
006/B06 = 21.3 (1.30)	020/B20 = 63.8 (3.89)
008/B08 = 26.4 (1.61)	022/B22 = 70.3 (4.29)
010/B10 = 34.1 (2.08)	025/B25 = 79.3 (4.84)
012/B12 = 37.1 (2.26)	028/B28 = 88.8 (5.42)
014/B14 = 46.0 (2.81)	031/B31 = 100.0 (6.10)

*'0' - Uni - directional 'B' - Bi - directional

Modifications

Port connection variables

SAE 4 bolt flange (J518c)

P1 & P2 = 1"1/4 S=4"	
Type	UNC METRIC
P3	1" 3/4" 1" 3/4"
CODE	00 01 M0 M1

Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft

- 1 - Keyed (SAE C)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)
- 5 - Keyed (non SAE)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
		in ³ /rev	cm ³ /rev	p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1 & P2	014	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	017	3.55	58.2	23.10	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	020	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	024	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	028	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	031	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	035	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	038	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	042 ¹⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	045 ¹⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	050 ^{1,2)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
	061 ^{1,3)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
P3	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.22	8.4
	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
	028 ²⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	65.04	48.5
	031 ²⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	72.95	54.4

1) 042-045-050-061=2200 RPM max.

2) 028-031- 050=210 bar (3000 psi) max. int,


3) 061 = 120 bar (1740 psi) max. int, 061 = 80 bar (1160 psi) cont.

INTERNAL LEAKAGE (TYPICAL)

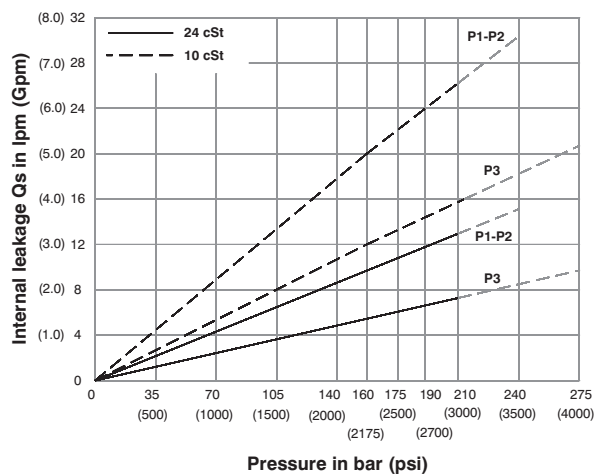


Don not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

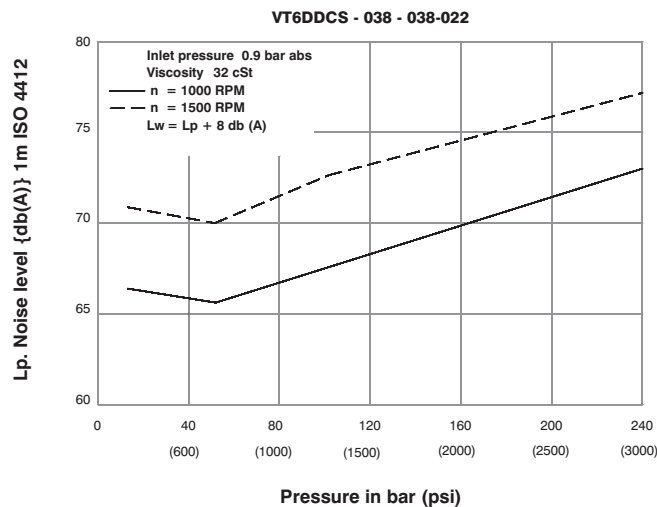


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

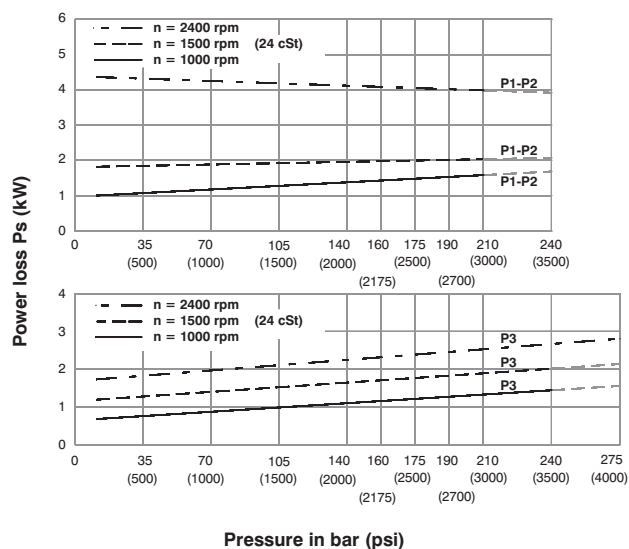


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

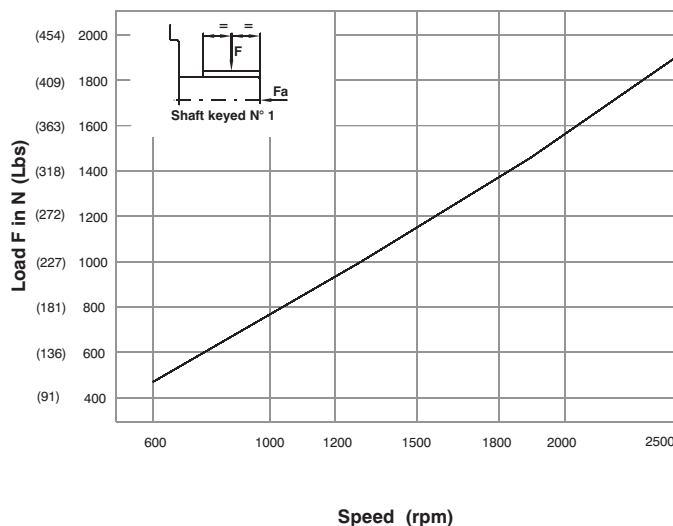

Maximum axial load permissible $F_a = 1200$ N (270 Lbs)



SAE CC splined shaft
Class 1-J498b
12/24 dp. 17 teeth
30° pressure angle
flat root side fit

Alternate connect.variables		
	00 & M0	01 & M1
A	1.03 (26.2)	0.874 (22.2)
B	2.06 (52.4)	1.874 (47.6)
C	1.00 (25.4)	0.75 (19.05)

Shaft	Vp x p max. (P1 + P2+ P3)
1	38299 (43240)
2	63979 (72306)
3	54207 (61200)
5	49197 (55600)

Note : Product details are liable to change without notice

VT6EDC - 062 - 035 - 017 - 1 R 00 - C 1 - P - 0 - *

Series

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

042 = 1 ³ 2.3 (8.07)	062 = 196.7 (12.00)
045 = 142.4 (8.69)	066 = 21 ³ .3 (1 ³ .02)
050 = 158.5 (9.67)	072 = 227.1 (1 ³ .86)
052 = 164.8 (10.06)	085 = 269.8 (16.46)
057 = 180.7 (11.02)	

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

*014/B14 = 47.6 (2.90)	0 ³ 5/B ³ 5 = 111.0 (6.77)
017/B17 = 58.2 (3.55)	0 ³ 8/B ³ 8 = 120.3 (7.34)
020/B20 = 66.0 (4.0 ³)	042/B42 = 1 ³ 6.0 (8.30)
024/B24 = 79.5 (4.85)	045/B45 = 145.7 (8.89)
028/B28 = 89.7 (5.47)	050/B50 = 158.0 (9.64)
0 ³ 1/B ³ 1 = 98.3 (6.00)	061/B61 = 190.5 (11.62)

*0 - Uni - directional 'B' - Bi - directional

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

*00 ³ /B0 ³ = 10.8 (0.66)	015/B15 = 50.5 (3.08)
005/B05 = 17.2 (1.05)	017/B17 = 58.3 (3.56)
006/B06 = 21.3 (1.30)	020/B20 = 63.8 (3.89)
008/B08 = 26.4 (1.61)	022/B22 = 70.3 (4.29)
010/B10 = 34.1 (2.08)	025/B25 = 79.3 (4.84)
012/B12 = 37.1 (2.26)	028/B28 = 88.8 (5.42)
014/B14 = 46.0 (2.81)	0 ³ 1/B ³ 1 = 100.0 (6.10)

*0 - Uni - directional 'B' - Bi - directional

Modifications

Mounting w/connection variables

0 = P3 = 1" SAE
1 = P3 = 3/4" SAE

Mounting (pump)

P = Pedestal mounting
F = Face mounting

Seal class

1 - S1 (for mineral oil)
4 - S4 (for fire resistant fluids)
5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation
(view on shaft end)R - Clockwise
L - Counter - clockwise

Type of Shaft

1 - Keyed (G45N-ISO 3019-2)

TP

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
		in ³ /rev	cm ³ /rev	p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.3	52.50	198.5	49.87	188.5	47.96	181.3	6.97	5.2	66.25	49.4	110.77	82.6
	045	8.70	142.4	56.51	213.6	53.86	203.6	51.98	196.5	7.24	5.4	70.94	52.9	118.95	88.7
	050	9.67	158.5	62.88	237.7	60.24	227.7	58.36	220.6	7.64	5.7	78.45	58.5	131.82	98.3
	052	10.00	164.8	65.40	247.2	62.75	237.2	60.87	230.1	7.78	5.8	81.53	60.8	136.92	102.1
	057	11.02	180.7	71.71	271.1	69.07	261.1	67.19	254.0	8.18	6.1	89.04	66.4	143.35	106.9
	062	12.00	196.7	78.04	295.0	75.40	285.0	73.52	277.9	8.58	6.4	96.42	71.9	162.67	121.3
	066	13.00	213.3	84.63	319.9	81.98	309.9	80.11	302.8	8.98	6.7	104.20	77.7	175.94	131.2
	072	13.86	227.1	90.11	340.6	87.46	330.6	85.58	323.5	9.25	6.9	110.77	82.6	187.07	139.5
	085 ^{1,2)}	16.40	269.8	107.00	404.7	105.21	397.7	--	--	9.78	7.3	87.56	65.3	--	--
P2	014	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	020	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	024	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	028	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	031	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	035	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	038	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	042 ³⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	045 ³⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	050 ^{3,4)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
	061 ^{3,5)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
	003	0.66	10.8	4.29	16.2	2.96	11.2	2.04	7.7	1.74	1.3	7.11	5.3	11.22	8.4
P3	005	1.05	17.2	6.83	25.8	5.50	20.8	4.57	17.3	1.88	1.4	10.06	7.5	16.36	12.2
	006	1.30	21.3	8.44	31.9	7.11	26.9	6.19	23.4	2.01	1.5	11.94	8.9	19.71	14.7
	008	1.61	26.4	10.48	39.6	9.15	34.6	8.22	31.1	2.15	1.6	14.35	10.7	22.93	17.7
	010	2.08	34.1	13.52	51.1	12.19	46.1	11.26	42.6	2.28	1.7	18.64	13.4	29.90	22.3
	012	2.26	37.1	14.71	55.6	13.36	50.6	12.46	47.1	2.28	1.7	19.31	14.4	32.32	24.1
	014	2.81	46.0	18.25	69.0	16.93	64.0	16.00	60.5	2.55	1.9	23.60	17.6	39.56	29.5
	015	3.08	50.5	20.00	75.6	18.73	73.2	19.02	67.5	2.68	2.0	25.61	19.1	42.91	32.0
	017	3.56	58.3	23.12	87.4	21.79	82.4	20.87	78.9	2.82	2.1	29.37	21.9	49.48	36.9
	020	3.89	63.8	25.32	95.7	23.99	90.7	23.07	87.2	2.95	2.2	31.92	23.8	53.91	40.2
	022	4.29	70.3	27.88	105.4	26.56	100.4	25.63	96.9	3.08	2.3	35.00	26.1	59.14	44.1
	025	4.84	79.3	31.46	118.9	30.13	113.9	29.21	110.4	3.35	2.5	39.16	29.2	66.38	49.5
	028 ⁴⁾	5.42	88.8	35.24	133.2	33.92	128.2	33.28	125.8	3.75	2.8	43.85	32.7	65.04	48.5
	031 ⁴⁾	6.10	100.0	39.68	150.0	38.35	145.0	37.72	142.6	3.75	2.8	48.95	36.5	72.95	54.4

1) 085 = 2000 RPM max.


2) 085 = 75 bar (1100 psi) cont. 085 = 90 bar (1300 psi) max. int.

3) 042-045-050-061=2200 RPM max.

4) 028-031-050=210 bar (3000 psi) max. int.


5) 061 = 120 bar (1740 psi) max. int. 061 = 80 bar (1160 psi) cont.

INTERNAL LEAKAGE (TYPICAL)

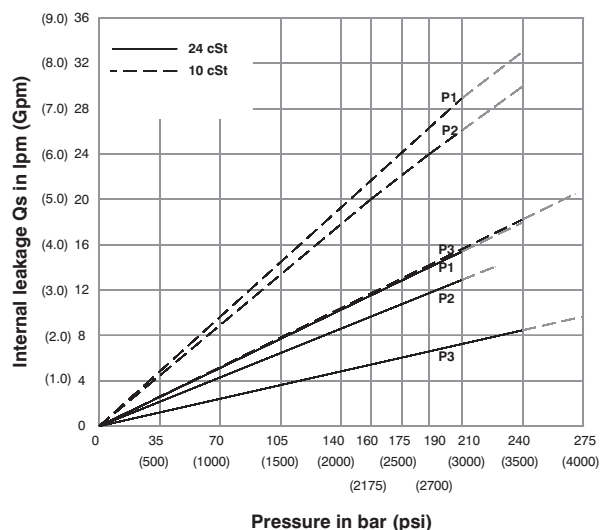


Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

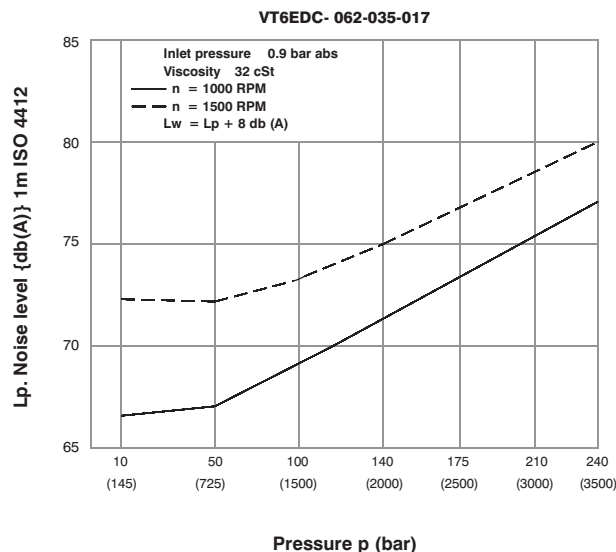


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

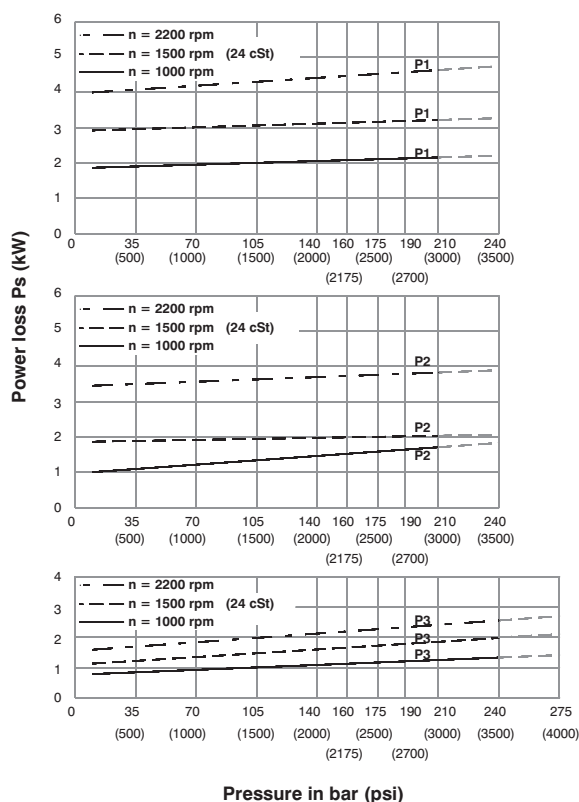


Total hydromechanical power loss is the sum of each section at its operating conditions

PERMISSIBLE RADIAL LOAD

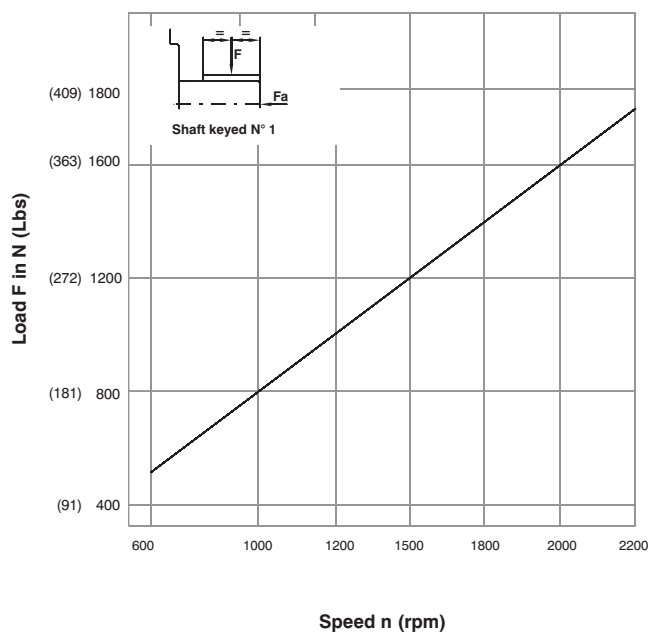

Maximum axial load permissible $F_a = 2000\text{N}$ (449 lbs)

Shaft torque limits in ³ /rev x psi (ml/rev x bar)	
Shaft	Vp x p max. (P1+P2+P3)
1	101506 (114715)

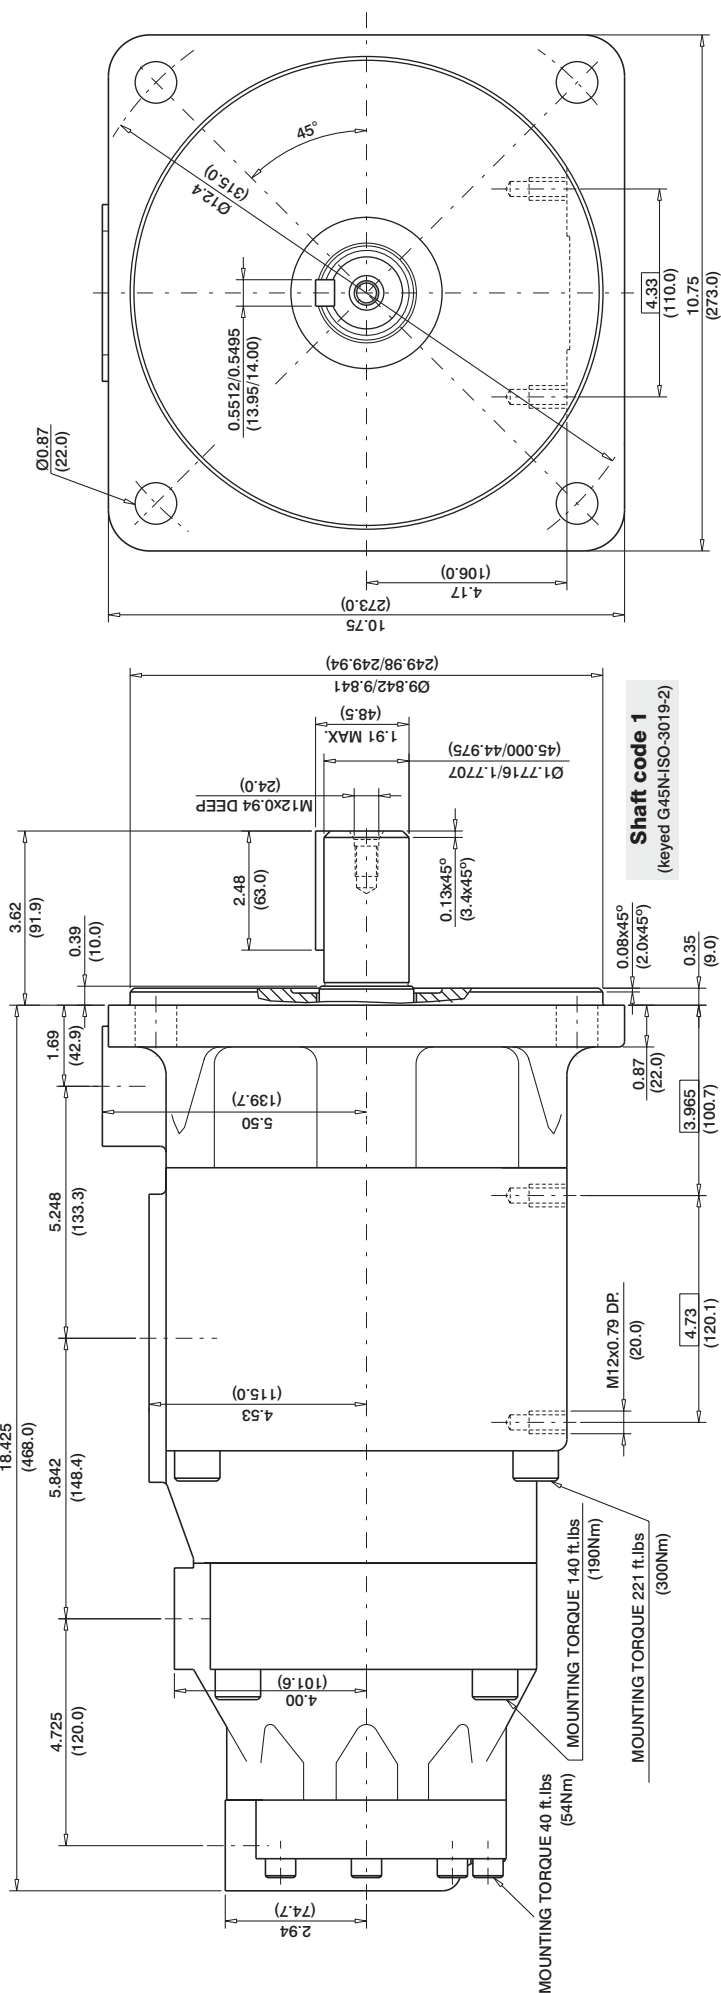

VT6DCCM - 038 - 028 - 008 - 1 R 00 - B 1 - 00 - *

Series P1 P2 P3

Cam ring for "P1"
 Volumetric displacement cm³/rev (in³/rev)
 *B14/R14 = 47.6 (2.90) B³5/R³5 = 110.0 (6.77)
 B17/R17 = 58.2 (3.55) B³8/R³8 = 120.3 (7.34)
 B20/R20 = 66.0 (4.03) B42/R42 = 136.0 (8.30)
 B24/R24 = 79.5 (4.85) B45/R45 = 145.7 (8.80)
 B28/R28 = 89.7 (5.47) B50/R50 = 158.0 (9.64)
 B³1/R³1 = 98.3 (6.00) B61/R61 = 190.5 (11.62)
 *'B' - for Mobile 'R' - for Mobile - spring assisted

Cam ring for "P2" & "P3"
 Volumetric displacement cm³/rev (in³/rev)
 *B0³/R0³ = 10.8 (0.66) B15/R15 = 50.5 (3.08)
 B05/R05 = 17.2 (1.05) B17/R17 = 58.3 (3.56)
 B06/R06 = 21.3 (1.30) B20/R20 = 63.8 (3.89)
 B08/R08 = 26.4 (1.61) B22/R22 = 70.3 (4.29)
 B10/R10 = 34.1 (2.08) B25/R25 = 79.3 (4.84)
 B12/R12 = 37.1 (2.26) B28/R28 = 88.8 (5.42)
 B14/R14 = 46.0 (2.81) B³1/R³1 = 100.0 (6.10)
 *'B' - for Mobile
 *'R' - for Mobile - spring assisted

Modification

Mounting w/connection variables

	UNC		METRIC	
	00	01	M0	M1
P3	1"	3/4"	1"	3/4"

Seal class
 1 - S1 (for mineral oil)
 4 - S4 (for fire resistant fluids)
 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)
 00 = Standard

Direction of rotation (view on shaft end)
 R - Clockwise
 L - Counter - clockwise

Type of Shaft
 1 - Keyed (no SAE)
 2 - Keyed (SAE CC)
 3 - Splined (SAE C)
 4 - Splined (SAE CC)
 6 - Splined (no SAE)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	B14	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	B17	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	B20	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	B24	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	B28	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	B31	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	B35	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	B38	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	B42 ¹⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	B45 ¹⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	B50 ^{1,2)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
	B61 ^{1,3)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
P2 & P3	B03	0.66	10.8	4.29	16.2	2.83	10.7	--	--	1.74	1.3	7.11	5.3	--	--
	B05	1.05	17.2	6.83	25.8	5.37	20.3	4.17	15.8	1.88	1.4	10.06	7.5	16.36	12.2
	B06	1.30	21.3	8.44	31.9	7.01	26.5	5.82	22.0	2.01	1.5	11.94	8.9	19.71	14.7
	B08	1.61	26.4	10.48	39.6	9.02	34.1	7.83	29.6	2.15	1.6	14.35	10.7	22.93	17.7
	B10	2.08	34.1	13.52	51.1	12.08	45.7	10.89	41.2	2.28	1.7	18.64	13.4	29.90	22.3
	B12	2.26	37.1	14.71	55.6	13.28	50.2	12.08	45.7	2.28	1.7	19.31	14.4	32.32	24.1
	B14	2.81	46.0	18.25	69.0	16.79	63.5	15.60	59.0	2.55	1.9	23.60	17.6	39.56	29.5
	B15	3.08	50.5	20.00	75.6	18.62	70.4	17.46	66.0	2.68	2.0	25.61	19.1	42.91	32.0
	B17	3.56	58.3	23.12	87.4	21.69	82.0	20.50	77.5	2.82	2.1	29.37	21.9	49.48	36.9
	B20	3.89	63.8	25.32	95.7	23.86	90.2	22.67	85.7	2.95	2.2	31.92	23.8	53.91	40.2
	B22	4.29	70.3	27.88	105.4	26.45	100.0	25.26	95.5	3.08	2.3	35.00	26.1	59.14	44.1
	B25	4.84	79.3	31.46	118.9	30.02	113.5	28.83	109.0	3.35	2.5	39.16	29.2	66.38	49.5
	B28 ²⁾	5.42	88.8	35.24	133.2	33.78	127.7	32.93	124.5	3.75	2.8	43.85	32.7	65.04	48.5
	B31 ²⁾	6.10	100.0	39.68	150.0	38.22	144.5	37.38	141.3	3.75	2.8	48.95	36.5	72.95	54.4


1) B42-B45-B50-B61=2200 RPM max.

2) B28-B31- B50=210 bar (3000 psi) max. int,

3) 061 = 120 bar (1740 psi) max. int, 061 = 80 bar (1160 psi) cont.


-- Not to use because internal leakage greater than 50% theoretical flow.

INTERNAL LEAKAGE (TYPICAL)

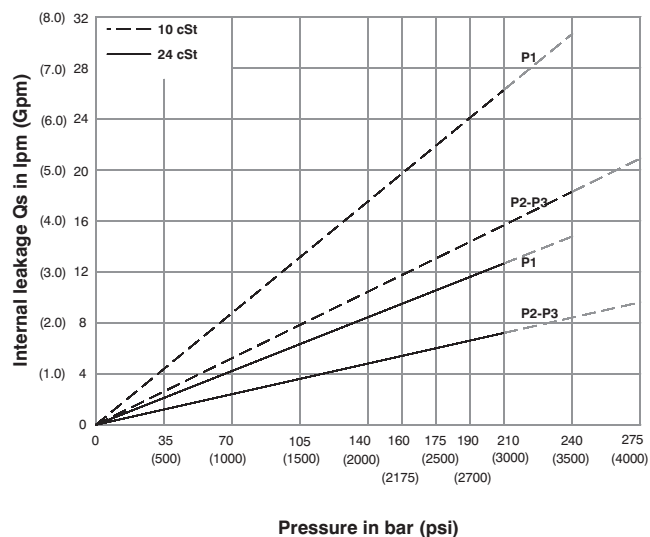


Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

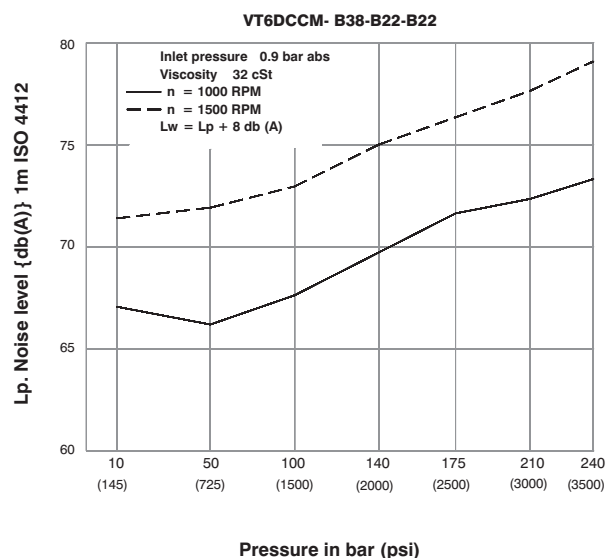


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

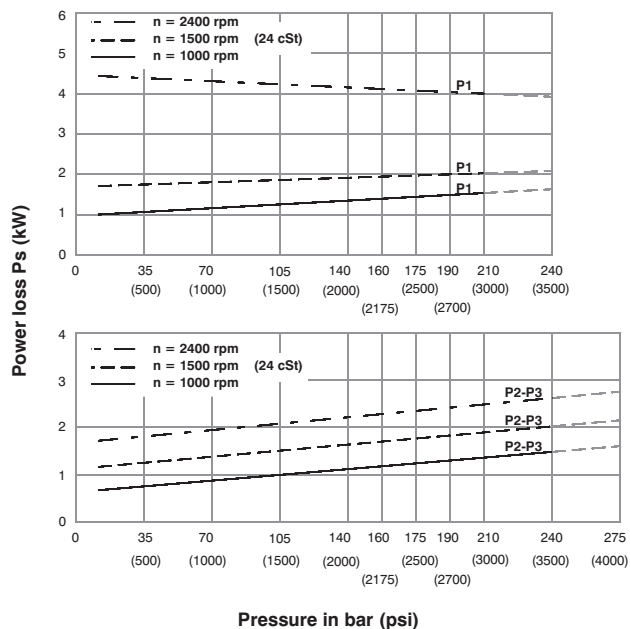


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

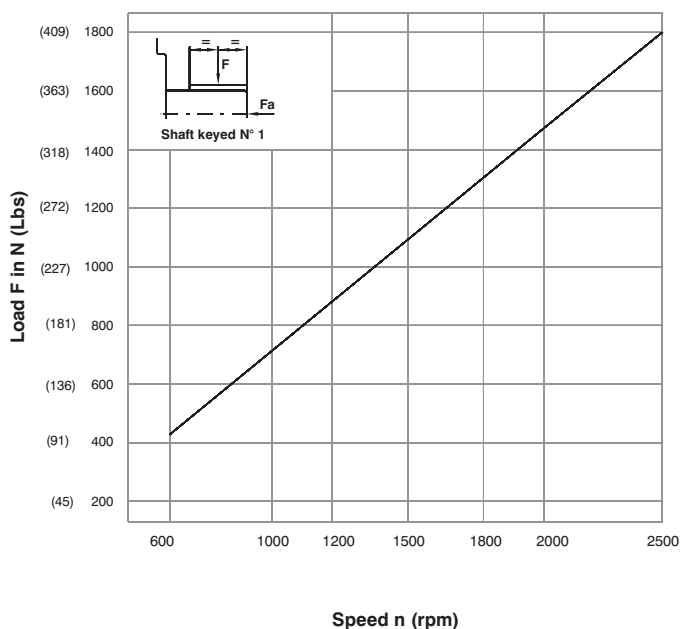

Maximum axial load permissible $F_a = 1200$ N (270 Lbs)

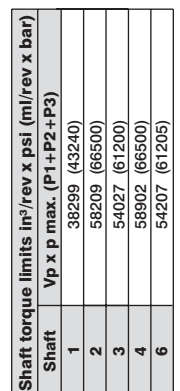

VT6EDC* - 062 - 035 - 017 - 1 R 00 - C 1 - P - 0 - *

Series

* = M for ISO Mtg. Flange
* = S for SAE Mtg. Flange

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

042 = 1 ³ 2. ³ (8.07)	062 = 196.7 (12.00)
045 = 142.4 (8.69)	066 = 213. ³ (13.02)
050 = 158.5 (9.67)	072 = 227.1 (13.86)
052 = 164.8 (10.06)	085 = 269.8 (16.46)
057 = 180.7 (11.02)	

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

*B14/R14 = 47.6 (2.90)	B ³ 5/R ³ 5 = 110.0 (6.77)
B17/R17 = 58.2 (3.55)	B ³ 8/R ³ 8 = 120. ³ (7.34)
B20/R20 = 66.0 (4.0 ³)	B42/R42 = 1 ³ 6.0 (8.30)
B24/R24 = 79.5 (4.85)	B45/R45 = 145.7 (8.80)
B28/R28 = 89.7 (5.47)	B50/R50 = 158.0 (9.64)
B ³ 1/R ³ 1 = 98. ³ (6.00)	B61/R61 = 190.5 (11.62)

*'B' - for Mobile 'R' - for Mobile - spring assisted

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

*B ³ 0/R ³ 0 = 10.8 (0.66)	B15/R15 = 50.5 (3.08)
B05/R05 = 17.2 (1.05)	B17/R17 = 58. ³ (3.56)
B06/R06 = 21. ³ (1.30)	B20/R20 = 63.8 (3.89)
B08/R08 = 26.4 (1.61)	B22/R22 = 70. ³ (4.29)
B10/R10 = 34.1 (2.08)	B25/R25 = 79. ³ (4.84)
B12/R12 = 37.1 (2.26)	B28/R28 = 88.8 (5.42)
B14/R14 = 46.0 (2.81)	B ³ 1/R ³ 1 = 100.0 (6.10)

*'B' - for Mobile 'R' - for Mobile - spring assisted

Modifications

Mounting w/connection variables

0 = P³ = 1" SAE
1 = P³ = 3/4" SAE

Mounting (pump)

P= Pedestal mounting
F= Face mounting

Seal class

1 - S1 (for mineral oil)
4 - S4 (for fire resistant fluids)
5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation

(view on shaft end)

R - Clockwise
L - Counter - clockwise

Type of Shaft

1 - Keyed (G45N-ISO 3019-2)

TP

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.3	52.50	198.5	49.87	188.5	47.96	181.3	6.97	5.2	66.25	49.4	110.77	82.6
	045	8.70	142.4	56.51	213.6	53.86	203.6	51.98	196.5	7.24	5.4	70.94	52.9	118.95	88.7
	050	9.67	158.5	62.88	237.7	60.24	227.7	58.36	220.6	7.64	5.7	78.45	58.5	131.82	98.3
	052	10.00	164.8	65.40	247.2	62.75	237.2	60.87	230.1	7.78	5.8	81.53	60.8	136.92	102.1
	057	11.02	180.7	71.71	271.1	69.07	261.1	67.19	254.0	8.18	6.1	89.04	66.4	143.35	106.9
	062	12.00	196.7	78.04	295.0	75.40	285.0	73.52	277.9	8.58	6.4	96.42	71.9	162.67	121.3
	066	13.00	213.3	84.63	319.9	81.98	309.9	80.11	302.8	8.98	6.7	104.20	77.7	175.94	131.2
	072	13.86	227.1	90.11	340.6	87.46	330.6	85.58	323.5	9.25	6.9	110.77	82.6	187.07	139.5
	085 ^{1,2)}	16.40	269.8	107.00	404.7	105.21	397.7	--	--	9.78	7.3	87.56	65.3	--	--
P2	B14	2.90	47.6	18.88	71.4	16.42	62.1	14.78	55.9	3.08	2.3	24.81	18.5	41.03	30.6
	B17	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	B20	4.00	66.0	26.19	99.0	23.73	89.7	22.08	83.5	3.75	2.8	33.39	24.9	55.92	41.7
	B24	4.80	79.5	31.56	119.3	29.10	110.0	27.46	103.8	4.02	3.0	39.69	29.6	66.78	49.8
	B28	5.50	89.7	35.58	134.5	33.12	125.2	31.48	119.0	4.29	3.2	44.52	33.2	74.96	55.9
	B31	6.00	98.3	39.00	147.5	36.53	138.1	34.89	131.9	4.42	3.3	48.54	36.2	81.80	61.0
	B35	6.80	111.0	44.04	166.5	41.58	157.2	39.94	151.0	4.69	3.5	54.58	40.7	92.13	68.7
	B38	7.30	120.3	47.72	180.4	45.26	171.1	43.62	164.9	4.96	3.7	58.87	43.9	99.64	74.3
	B42 ³⁾	8.30	136.0	53.96	204.0	51.50	194.7	49.86	188.5	5.36	4.0	66.25	49.4	112.24	83.7
	B45 ³⁾	8.89	145.7	57.80	218.5	55.34	209.2	53.70	203.0	5.50	4.1	70.81	52.8	120.02	89.5
	B50 ^{3,4)}	9.64	158.0	62.69	237.0	60.23	227.7	59.25	224.0	5.90	4.4	76.44	57.0	113.98	85.0
P3	B61 ^{3,5)}	11.62	190.5	76.25	285.7	73.54	278.0	--	--	6.16	4.6	81.26	60.6	--	--
	B03	0.66	10.8	4.29	16.2	2.83	10.7	--	--	1.74	1.3	7.11	5.3	--	--
	B05	1.05	17.2	6.83	25.8	5.37	20.3	4.17	15.8	1.88	1.4	10.06	7.5	16.36	12.2
	B06	1.30	21.3	8.44	31.9	7.01	26.5	5.82	22.0	2.01	1.5	11.94	8.9	19.71	14.7
	B08	1.61	26.4	10.48	39.6	9.02	34.1	7.83	29.6	2.15	1.6	14.35	10.7	22.93	17.7
	B10	2.08	34.1	13.52	51.1	12.08	45.7	10.89	41.2	2.28	1.7	18.64	13.4	29.90	22.3
	B12	2.26	37.1	14.71	55.6	13.28	50.2	12.08	45.7	2.28	1.7	19.31	14.4	32.32	24.1
	B14	2.81	46.0	18.25	69.0	16.79	63.5	15.60	59.0	2.55	1.9	23.60	17.6	39.56	29.5
	B15	3.08	50.5	20.00	75.6	18.62	70.4	17.46	66.0	2.68	2.0	25.61	19.1	42.91	32.0
	B17	3.56	58.3	23.12	87.4	21.69	82.0	20.50	77.5	2.82	2.1	29.37	21.9	49.48	36.9
	B20	3.89	63.8	25.32	95.7	23.86	90.2	22.67	85.7	2.95	2.2	31.92	23.8	53.91	40.2
	B22	4.29	70.3	27.88	105.4	26.45	100.0	25.26	95.5	3.08	2.3	35.00	26.1	59.14	44.1
	B25	4.84	79.3	31.46	118.9	30.02	113.5	28.83	109.0	3.35	2.5	39.16	29.2	66.38	49.5
	B28 ⁴⁾	5.42	88.8	35.24	133.2	33.78	127.7	32.93	124.5	3.75	2.8	43.85	32.7	65.04	48.5
	B31 ⁴⁾	6.10	100.0	39.68	150.0	38.22	144.5	37.38	141.3	3.75	2.8	48.95	36.5	72.95	54.4

1) 085 = 2000 RPM max. 2) 085 = 75 bar (1100 psi) cont. & 085 = 90 bar (1300 psi) max. int. 3) B42-B45-B50-B61=2200 RPM max. 4) B28-B31-B50=210 bar (3000 psi) max. int.

5) B61 = 120 bar (1740 psi) max. int. B61 = 80 bar (1160 psi) cont.


-- Not to use because internal leakage greater than 50% theoretical flow

INTERNAL LEAKAGE (TYPICAL)

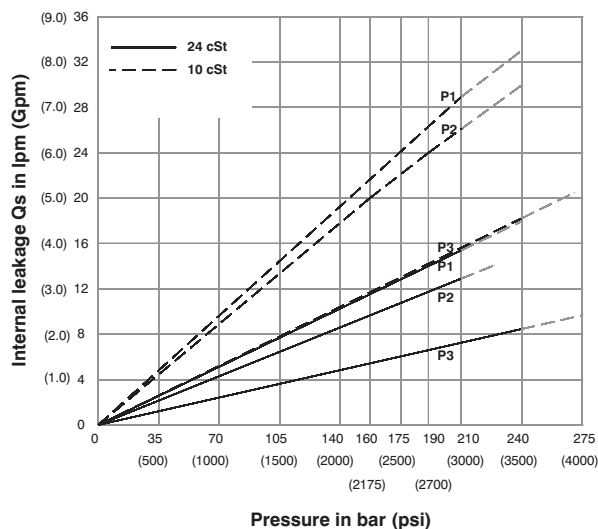


Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

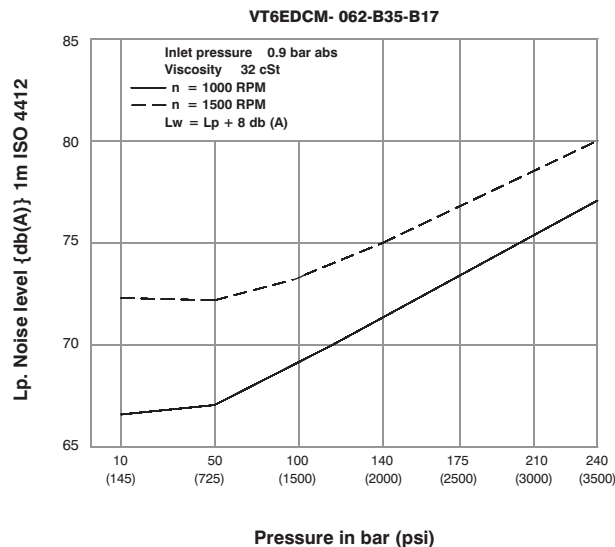


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

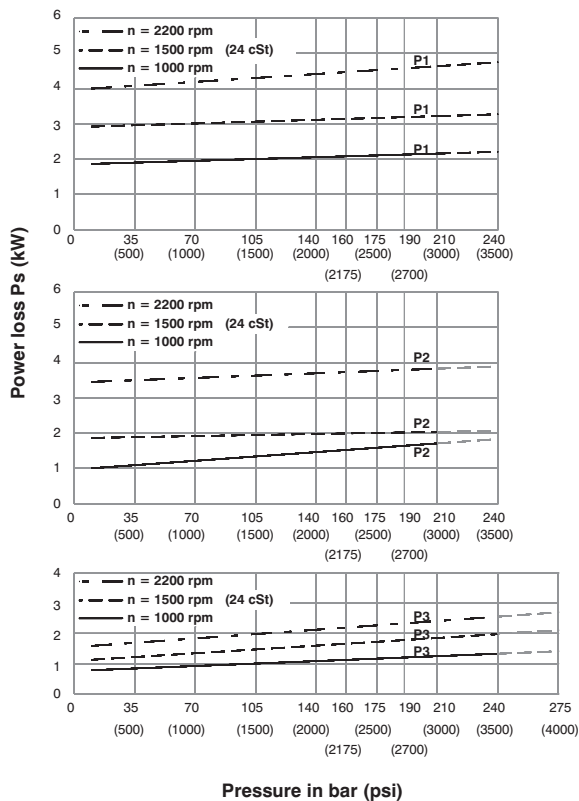

Total hydromechanical power loss is the sum of each section at its operating conditions

PERMISSIBLE RADIAL LOAD

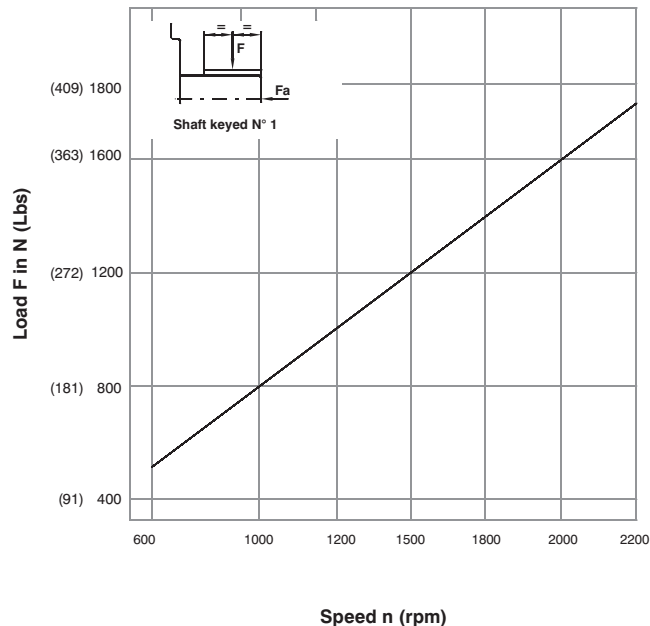



Maximum axial load permissible $F_a = 2000\text{N}$ (449 lbs)

PORT	CODE	A	B	C
P3	0	2.06 (52.4)	1.03 (26.2)	1.00 (25.4)
	1	1.874 (47.6)	0.874 (22.2)	0.75 (19.05)

Shaft torque limits in ³ /rev x psi (ml/rev x bar)	
Shaft	Vp x p max. (P1+P2+P3)

Shaft	Vp x p max. (P1+P2+P3)
1	101506 (114715)

SAE D & E splined shaft
Class 1-J498b
8/16 Dp. 13 Teeth
30° Pressure angle
Flat root side fit

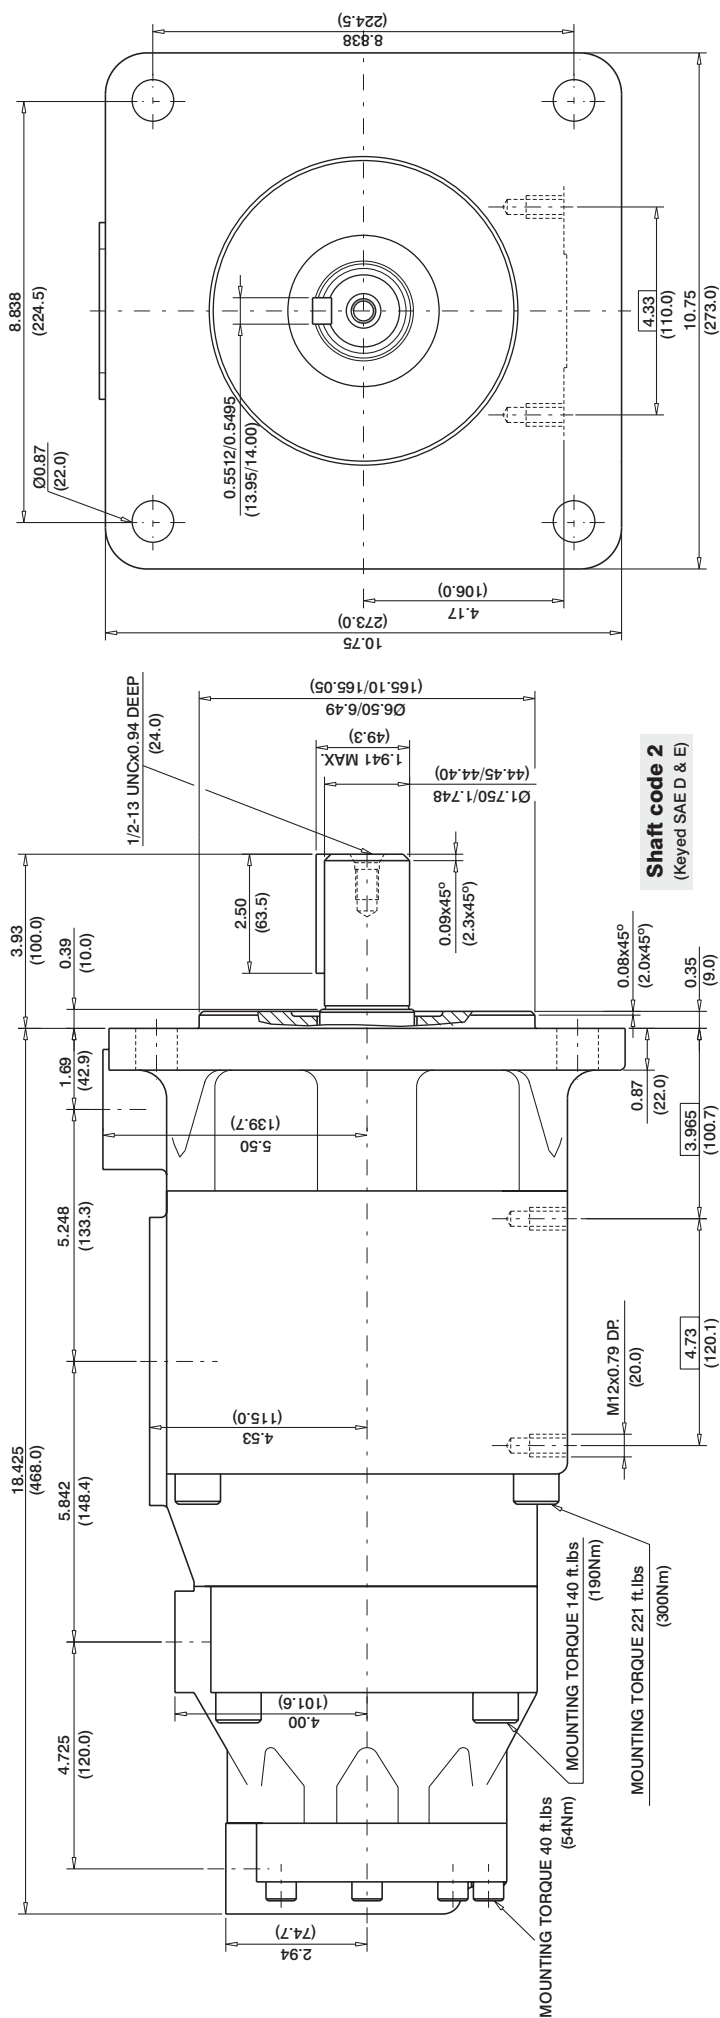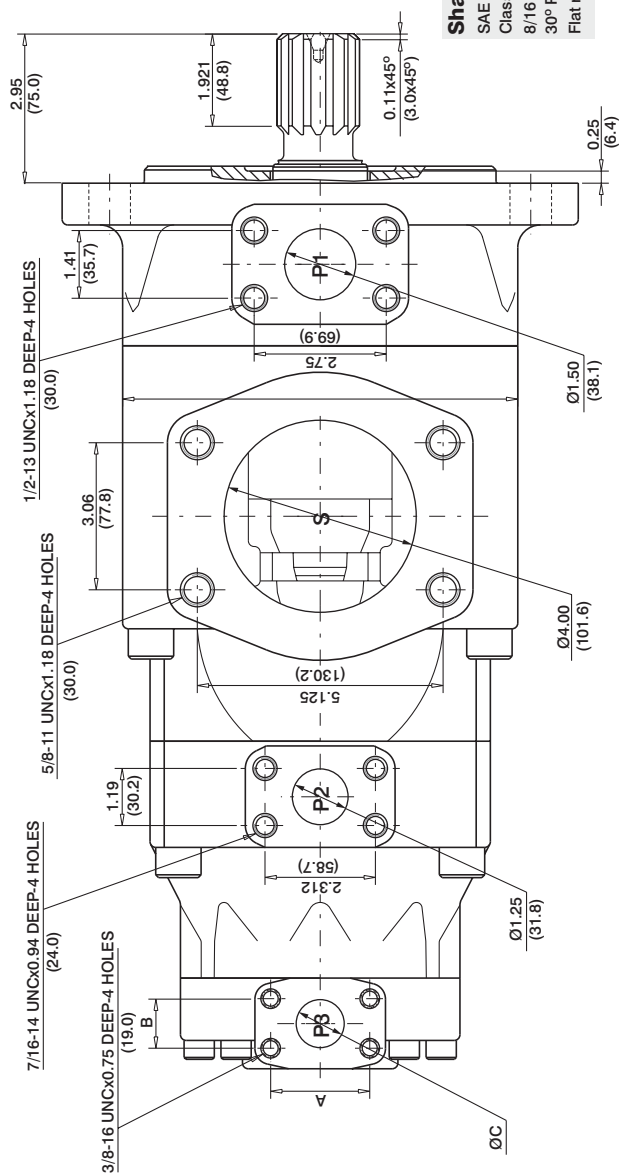

VT7DBB - B38 - B14 - B08 - 1 R 00 - A 1 - M1- *

Series- SAE C 2 bolts
Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

B14 = 43.9 (2.68)	B31 = 99.1 (6.05)
B17 = 55.0 (3.36)	B35 = 113.4 (6.92)
B20 = 66.0 (4.03)	B38 = 120.6 (7.36)
B22 = 70.3 (4.29)	B42 = 137.5 (8.39)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Cam ring for "P2" & P3

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.35)	B09 = 28.0 (1.71)
B03 = 9.8 (0.60)	B10 = 31.8 (1.94)
B04 = 12.8 (0.78)	B11 = 34.9 (2.13)
B05 = 15.9 (0.97)	B12 = 40.9 (2.50)
B06 = 19.8 (1.21)	B14 = 45.1 (2.75)
B07 = 22.5 (1.37)	B15 = 50.0 (3.05)
B08 = 24.9 (1.52)	

Modifications

Mounting w/connection variables

P1=1 1/4" P2=1" P3=3/4" S=4"	
UNC	METRIC
01	M1

Seal class

- 1 = S1 (for minreal oil)
- 4 = S4 (for fire resistant fluids)
- 5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)
00 = Standard

Direction of rotation
(view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft

- 1 - Keyed (no SAE)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	B14	2.68	43.9	20.92	79.1	19.18	72.5	17.81	67.3	3.46	2.6	27.77	20.7	47.03	35.0
	B17	3.36	55.0	26.16	98.8	24.41	92.3	23.04	87.0	3.77	2.8	33.88	25.3	57.71	43.0
	B20	4.03	66.0	31.39	118.6	29.64	112.0	28.27	106.8	4.07	3.0	39.98	29.8	68.39	50.9
	B22	4.29	70.3	33.43	126.4	31.69	119.8	30.32	104.6	4.19	3.1	42.37	31.6	72.57	54.0
	B24	4.95	81.1	38.57	145.8	36.82	139.2	35.45	134.0	4.49	3.4	48.36	36.1	83.06	61.9
	B28	5.49	89.9	42.80	161.8	41.06	155.2	39.69	150.0	4.74	3.5	53.30	39.7	91.70	68.3
	B31	6.05	99.1	47.18	178.3	45.43	171.7	44.06	166.5	4.99	3.7	58.41	43.6	100.63	75.0
	B35 ¹⁾	6.92	113.4	53.93	203.9	52.18	197.2	50.81	192.0	5.39	4.0	66.29	49.4	114.42	85.3
	B38 ¹⁾	7.36	120.6	57.35	216.8	55.61	210.2	54.24	204.9	5.59	4.2	70.28	52.4	121.42	90.5
	B42 ²⁾	8.39	137.5	65.39	247.2	63.65	240.6	62.28	235.4	6.05	4.5	79.66	59.4	137.83	102.7
P2 & P3	045 ³⁾	8.89	145.7	69.29	262.0	67.11	253.6	65.31	246.8	6.74	5.0	83.75	62.4	145.79	108.7
	050 ⁴⁾	9.64	157.9	75.14	284.0	72.96	275.8	71.78	271.3	7.08	5.3	90.58	67.5	154.50	110.3
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.04
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.63	14.0	0.85	0.63	6.24	4.65	12.93	9.64
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	12.34
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	15.13
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	18.64
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	21.07
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.95	14.62	10.90	31.15	23.23
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.19	34.92	26.04
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.09	18.45	13.75	39.48	29.44
	B11 ⁵⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.16	20.17	15.04	43.22	32.23
	B12 ⁵⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁵⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.24	55.48	41.37
	B15 ⁵⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76

1) B35-B38 = 280 bar (4060 psi) max.int.


2) B42 = 260 bar (3770 psi) max.int.

3) 045 = 240 bar (3500 psi) max. int.

4) 050 = 210 bar (3000 psi) max. int

5) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm


INTERNAL LEAKAGE (TYPICAL)

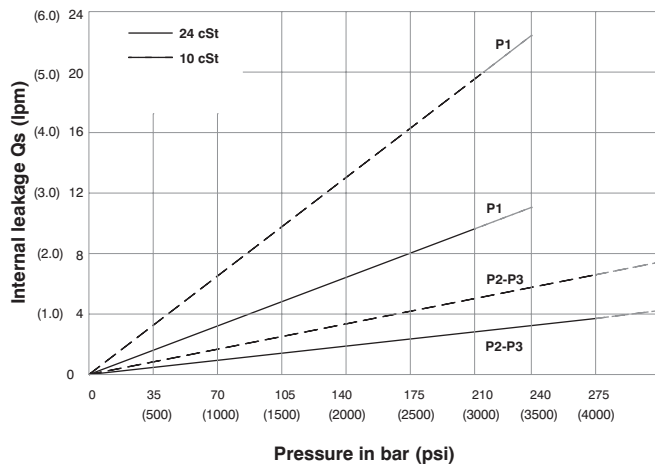

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.


NOISE LEVEL (TYPICAL)

VT7DBB- B38-B06-B04

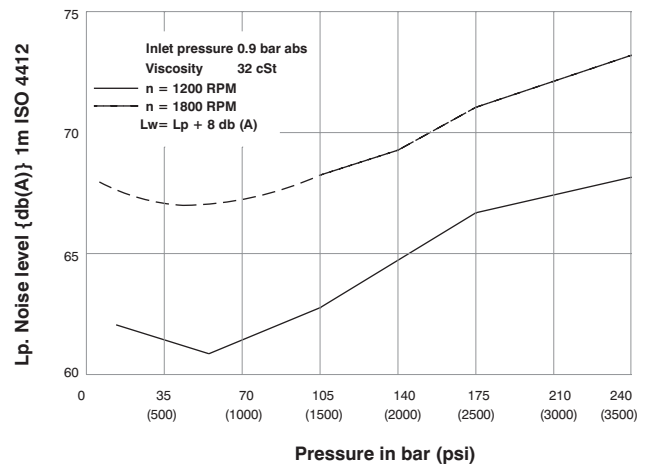


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

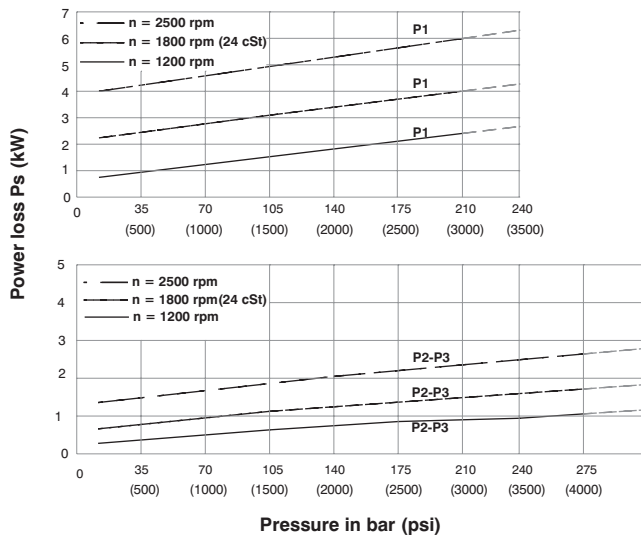

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

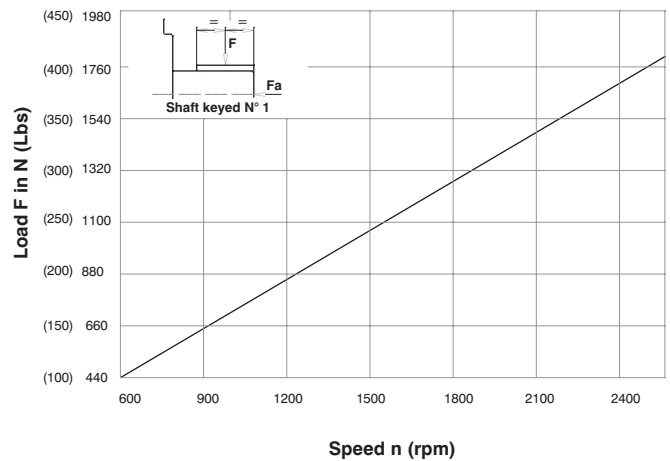

Maximum permissible axial load $F_a = 1200 \text{ N (270 Lbs)}$

HIGH PERFORMANCE VANE PUMP VT7QDCB



VT7QDCB - B38 - 028 - B10 - 1 R 00 - A 1 - M1 - *

Series- SAE C 2 bolts
Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

B14 = 43.9 (2.68)	B31 = 99.1 (6.05)
B17 = 55.0 (3.36)	B35 = 113.4 (6.92)
B20 = 66.0 (4.03)	B38 = 120.6 (7.36)
B22 = 70.3 (4.29)	B42 = 137.5 (8.39)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

*003/B03/Y03 = 10.8 (0.66)	015/B15/Y15 = 50.5 (3.08)
005/B05/Y05 = 17.2 (1.05)	017/B17/Y17 = 58.3 (3.56)
006/B06/Y06 = 21.3 (1.30)	020/B20/Y20 = 63.8 (3.89)
008/B08/Y08 = 26.4 (1.61)	022/B22/Y22 = 70.3 (4.29)
010/B10/Y10 = 34.1 (2.08)	025/B25/Y25 = 79.3 (4.84)
012/B12/Y12 = 37.1 (2.26)	028/B28/Y28 = 88.8 (5.42)
014/B14/Y14 = 46.0 (2.81)	031/B31/Y31 = 100.0 (6.10)

*"0" - Uni - directional 'B' - Bi - directional 'Y' - Bi - directional for cold start

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.35)	B07 = 22.5 (1.37)	B12 = 40.9 (2.50)
B03 = 9.8 (0.60)	B08 = 24.9 (1.52)	B14 = 45.1 (2.75)
B04 = 12.8 (0.78)	B09 = 28.0 (1.71)	B15 = 50.0 (3.05)
B05 = 15.9 (0.97)	B10 = 31.8 (1.94)	
B06 = 19.8 (1.21)	B11 = 34.9 (2.13)	

Modifications

Mounting w/connection variables

P1=1 1/4" P2=1" P3=3/4" S=4"

UNC	METRIC
01	M1

Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft

- 1 - Keyed (no SAE)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	B14	2.68	43.9	20.92	79.1	19.18	72.5	17.81	67.3	3.46	2.6	27.77	20.7	47.03	35.0
	B17	3.36	55.0	26.16	98.8	24.41	92.3	23.04	87.0	3.77	2.8	33.88	25.3	57.71	43.0
	B20	4.03	66.0	31.39	118.6	29.64	112.0	28.27	106.8	4.07	3.0	39.98	29.8	68.39	50.9
	B22	4.29	70.3	33.43	126.4	31.69	119.8	30.32	104.6	4.19	3.1	42.37	31.6	72.57	54.0
	B24	4.95	81.1	38.57	145.8	36.82	139.2	35.45	134.0	4.49	3.4	48.36	36.1	83.06	61.9
	B28	5.49	89.9	42.80	161.8	41.06	155.2	39.69	150.0	4.74	3.5	53.30	39.7	91.70	68.3
	B31	6.05	99.1	47.18	178.3	45.43	171.7	44.06	166.5	4.99	3.7	58.41	43.6	100.63	75.0
	B35 ¹⁾	6.92	113.4	53.93	203.9	52.18	197.2	50.81	192.0	5.39	4.0	66.29	49.4	114.42	85.3
	B38 ¹⁾	7.36	120.6	57.35	216.8	55.61	210.2	54.24	204.9	5.59	4.2	70.28	52.4	121.42	90.5
	B42 ²⁾	8.39	137.5	65.39	247.2	63.65	240.6	62.28	235.4	6.05	4.5	79.66	59.4	137.83	102.7
	045 ³⁾	8.89	145.7	69.29	262.0	67.11	253.6	65.31	246.8	6.74	5.0	83.75	62.4	145.79	108.7
P2	050 ⁴⁾	9.64	157.9	75.14	284.0	72.96	275.8	71.78	271.3	7.08	5.3	90.58	67.5	134.50	100.3
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	003	0.66	10.8	5.14	19.6	3.85	14.6	--	--	2.11	1.57	8.45	6.30	--	--
	005	1.05	17.2	8.18	30.9	6.89	26.0	4.34	16.44	2.29	1.70	12.00	8.94	23.97	17.88
	006	1.30	21.3	10.13	38.3	8.84	33.4	5.71	21.6	2.40	1.78	14.28	10.64	28.96	21.60
	008	1.61	26.4	12.55	47.4	11.26	42.6	8.12	30.72	2.54	1.89	17.11	12.75	35.08	26.16
	010	2.08	34.1	16.22	61.3	14.93	56.4	11.81	44.64	2.76	2.06	21.38	15.94	44.25	33.00
	012	2.26	37.1	17.64	66.7	16.35	61.8	13.24	50.04	2.84	2.11	23.05	17.18	47.47	35.40
	014	2.81	46.0	21.88	82.7	20.59	77.8	17.46	66.00	3.09	2.30	27.99	20.87	58.73	43.80
	015	3.08	50.5	23.99	90.7	22.83	86.3	19.39	73.32	3.21	2.40	30.30	22.60	63.56	47.40
	017	3.56	58.3	27.73	104.8	26.44	99.9	23.33	88.2	3.43	2.55	34.81	25.95	73.54	54.84
P3	020	3.89	63.8	30.34	114.7	29.05	109.8	25.93	98.04	3.58	2.66	37.86	28.23	80.14	59.76
	022 ⁶⁾	4.29	70.3	33.43	126.4	32.14	121.5	29.05	109.8	3.76	2.80	41.47	30.92	80.94	60.36
	025 ^{5,7)}	4.84	79.3	37.71	142.5	36.42	137.6	--	--	4.01	2.99	46.46	34.64	--	--
	028 ^{5,8)}	5.42	88.8	42.23	159.6	40.94	154.7	--	--	4.27	3.18	51.74	38.58	--	--
	031 ^{5,8)}	6.10	100.0	47.56	179.7	46.27	174.9	--	--	4.58	3.41	57.95	43.21	--	--
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.40
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.65	12.93	10.25
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	13.13
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	16.12
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	19.88
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	22.47
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.94	14.62	10.90	31.15	24.78
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.19	34.92	27.77
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.11	18.45	13.75	39.48	31.42
P3	B11 ⁹⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.15	20.17	15.04	43.22	32.22
	B12 ⁹⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁹⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.23	55.48	41.37
	B15 ⁹⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76


1) B35-B38 = 280 bar (4060 psi) max.int. 2) B42 = 260 bar (3770 psi) max.int. 3) 045 = 240 bar (3500 psi) max. int. 4) 050 = 210 bar (3000 psi) max. int.

5) 025-028-031 = 2500 R.P.M. max. 6) 022 = 275 bar max. int. 7) 025 = 240 bar max. int. 8) 028-031 = 210 bar max. int.

9) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm

-- Not to use because internal leakage greater than 50% of theoretical flow


INTERNAL LEAKAGE (TYPICAL)

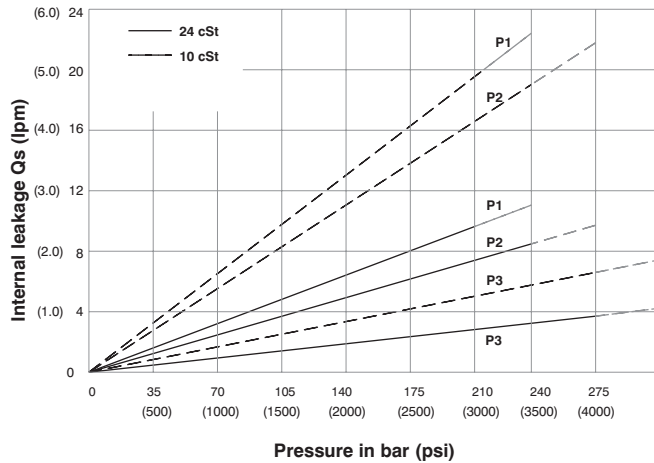

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.


NOISE LEVEL (TYPICAL)

VT7QDCB- B38-022-B10

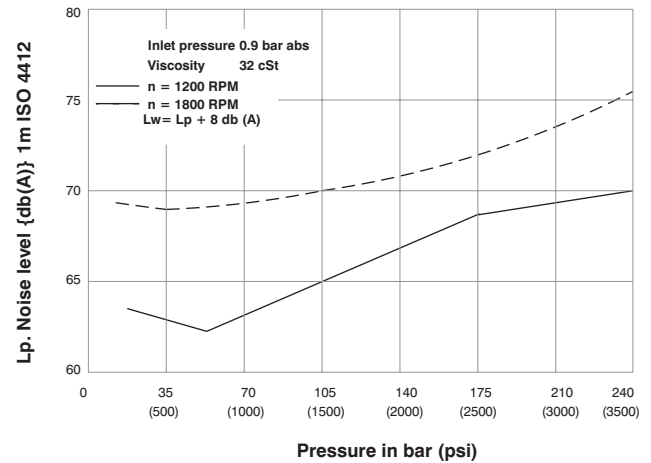


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

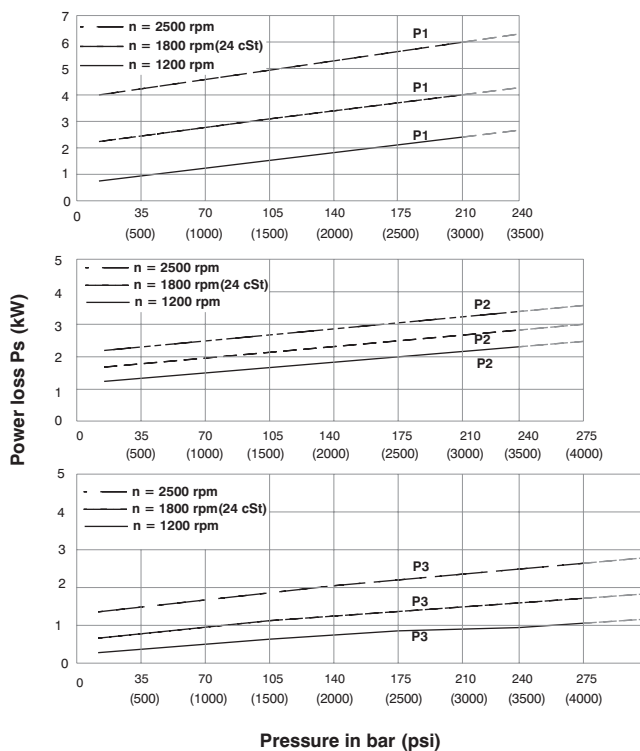

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

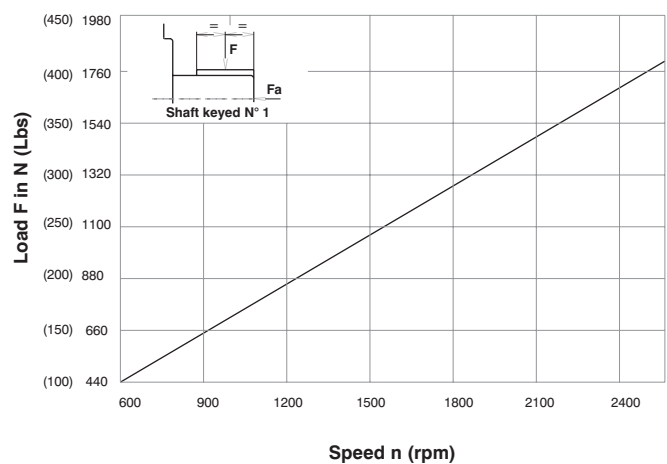


Maximum permissible axial load $F_a = 1200$ N (270 Lbs)


5/8-11 UNCx1.18 DEEP-4 HOLES
(M16x30.0 DEEP)

3/8-16 UNCx0.75 DEEP-4 HOLES
(M10x19.0 DEEP)



3/8-16 UNCx0.75 DEEP 4 HOLES
(M10x19.0 DEEP)

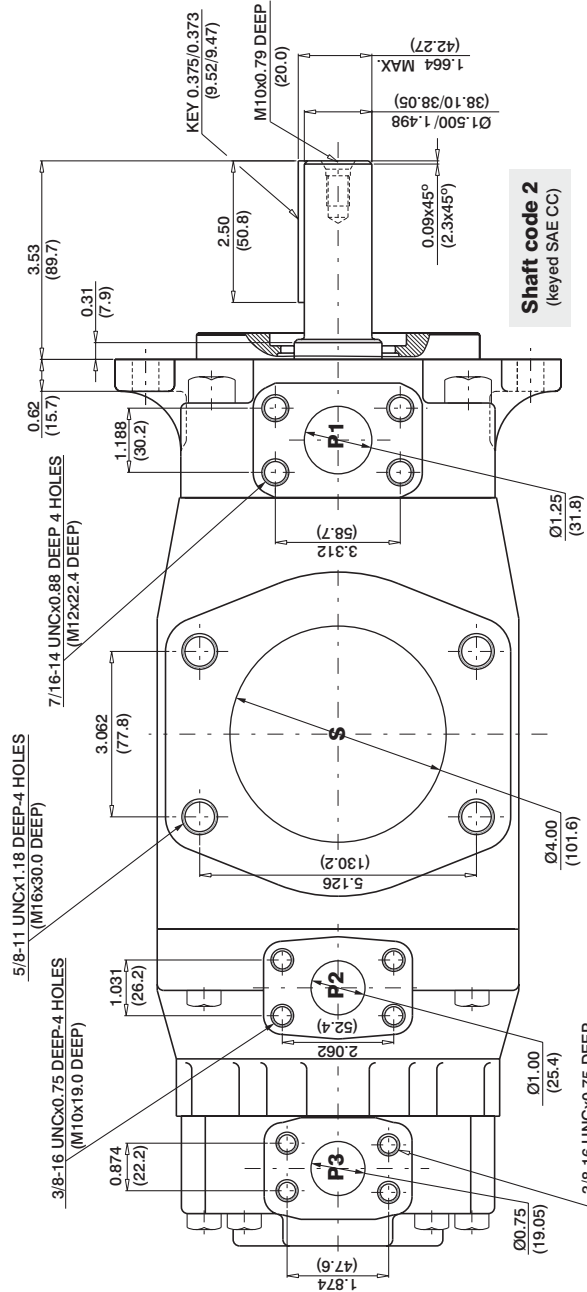

Shaft code 3
SAE C splined shaft
Class 1-J498b
12/24 Dp. 14 Teeth
30° Pressure angle
Flat root side fit

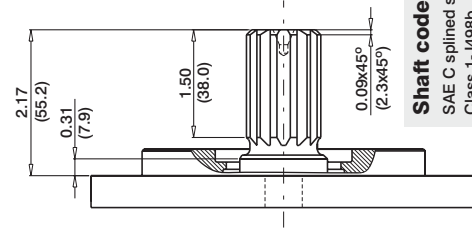

Shaft code 4
SAE CC splined shaft
Class 1-J498b
12/24 Dp. 17 Teeth
30° Pressure angle
Flat root side fit

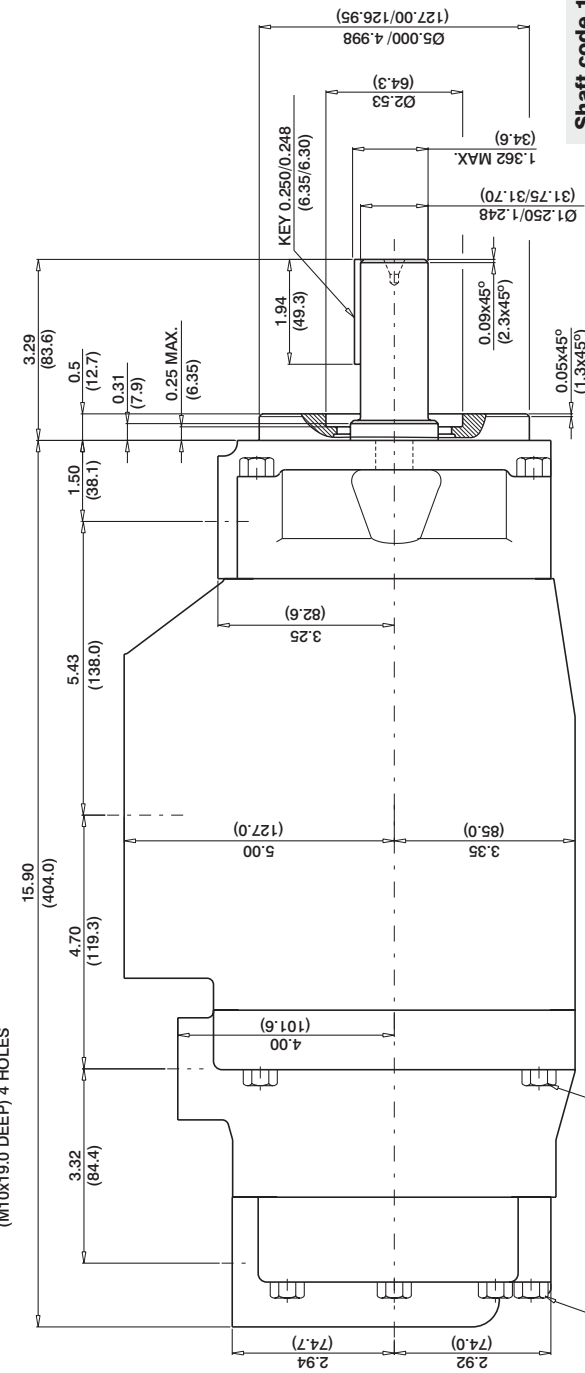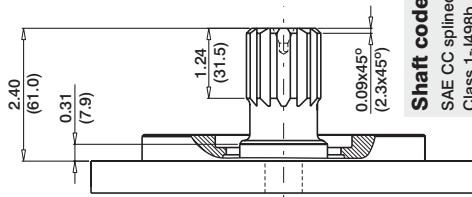


Shaft torque limits in ³ /rev x psi (ml/rev x bar)	
Shaft	Vp x p max. (P1+P2+P3)
1	38299 (43240)
2	58901 (66500)
3	54027 (61200)
4	58901 (66500)

MOUNTING TORQUE 138 ft.lbs
(187 Nm)

MOUNTING TORQUE 50 ft.lbs
(68 Nm)

MOUNTING TORQUE 138 ft.lbs
(187 Nm)

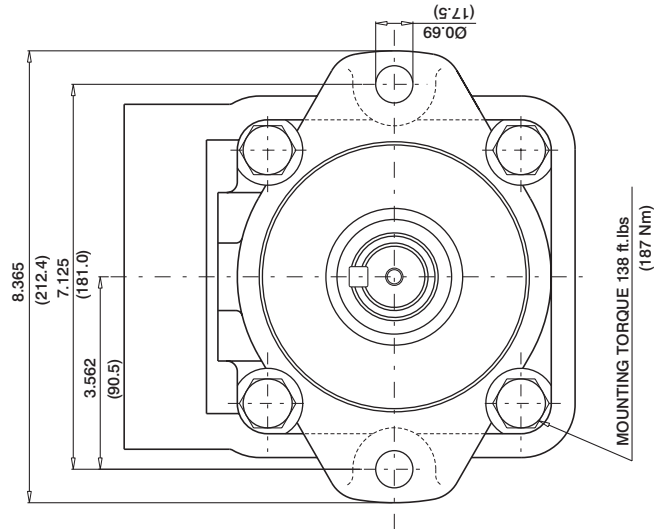

VT7QDCC - 038 - 028 - 008 - 1 R 00 - A 1 - 00 - *

Series

P1

P2

P3

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

B14 = 43.9 (2.68) B31 = 99.1 (6.05)

B17 = 55.0 (3.36) B35 = 113.4 (6.92)

B20 = 66.0 (4.03) B38 = 120.6 (7.36)

B22 = 70.3 (4.29) B42 = 137.5 (8.39)

B24 = 81.1 (4.95) 045 = 145.7 (8.89)

B28 = 89.9 (5.49) 050 = 157.9 (9.64)

Cam ring for "P2" & "P3"

Volumetric displacement cm³/rev (in³/rev)

* 003/B03/Y03 = 10.8 (0.66) 015/B15/Y15 = 50.5 (3.08)

005/B05/Y05 = 17.2 (1.05) 017/B17/Y17 = 58.3 (3.56)

006/B06/Y06 = 21.3 (1.30) 020/B20/Y20 = 63.8 (3.89)

008/B08/Y08 = 26.4 (1.61) 022/B22/Y22 = 70.3 (4.29)

010/B10/Y10 = 34.1 (2.08) 025/B25/Y25 = 79.3 (4.84)

012/B12/Y12 = 37.1 (2.26) 028/B28/Y28 = 88.8 (5.42)

014/B14/Y14 = 46.0 (2.81) 031/B31/Y31 = 100.0 (6.10)

* '0' - Uni - directional 'B' - Bi - directional 'Y' - Bi - directional for cold start

Type of Shaft

1 - Keyed (no SAE)

2 - Keyed (SAE CC)

3 - Splined (SAE C)

4 - Splined (SAE CC)

Modifications

Mounting w/connection variables

	UNC		METRIC	
	00	01	M0	M1
P3	1"	3/4"	1"	3/4"

Seal class

1 - S1 (for mineral oil)

4 - S4 (for fire resistant fluids)

5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation
(view on shaft end)

R - Clockwise

L - Counter - clockwise

TP


OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	B14	2.68	43.9	20.92	79.1	19.18	72.5	17.81	67.3	3.46	2.60	27.77	20.70	47.03	35.00
	B17	3.36	55.0	26.16	98.8	24.41	92.3	23.04	87.0	3.77	2.80	33.88	25.30	57.71	43.00
	B20	4.03	66.0	31.39	118.6	29.64	112.0	28.27	106.8	4.07	3.00	39.98	29.80	68.39	50.90
	B22	4.29	70.3	33.43	126.4	31.69	119.8	30.32	104.6	4.19	3.10	42.37	31.60	72.57	54.00
	B24	4.95	81.1	38.57	145.8	36.82	139.2	35.45	134.0	4.49	3.40	48.36	36.10	83.06	61.90
	B28	5.49	89.9	42.80	161.8	41.06	155.2	39.69	150.0	4.74	3.50	53.30	39.70	91.70	68.30
	B31	6.05	99.1	47.18	178.3	45.43	171.7	44.06	166.5	4.99	3.70	58.41	43.60	100.63	75.00
	B35 ¹⁾	6.92	113.4	53.93	203.9	52.18	197.2	50.81	192.0	5.39	4.00	66.29	49.40	114.42	85.30
	B38 ¹⁾	7.36	120.6	57.35	216.8	55.61	210.2	54.24	204.9	5.59	4.20	70.28	52.40	121.42	90.50
	B42 ²⁾	8.39	137.5	65.39	247.2	63.65	240.6	62.28	235.4	6.05	4.50	79.66	59.40	137.83	102.70
P2 & P3	045 ³⁾	8.89	145.7	69.29	262.0	67.11	253.6	65.31	246.8	6.74	5.00	83.75	62.40	145.79	108.70
	050 ⁴⁾	9.64	157.9	75.14	284.0	72.96	275.8	71.78	271.3	7.08	5.30	90.58	67.50	154.50	114.00
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	003	0.66	10.8	5.14	19.6	3.85	14.6	---	---	2.11	1.57	8.45	6.30	---	---
	005	1.05	17.2	8.18	30.9	6.89	26.0	4.34	16.44	2.29	1.70	12.00	8.94	23.97	17.88
	006	1.30	21.3	10.13	38.3	8.84	33.4	5.71	21.6	2.40	1.78	14.28	10.64	28.96	21.60
	008	1.61	26.4	12.55	47.4	11.26	42.6	8.12	30.72	2.54	1.89	17.11	12.75	35.08	26.16
	010	2.08	34.1	16.22	61.3	14.93	56.4	11.81	44.64	2.76	2.06	21.38	15.94	44.25	33.00
	012	2.26	37.1	17.64	66.7	16.35	61.8	13.24	50.04	2.84	2.11	23.05	17.18	47.47	35.40
	014	2.81	46.0	21.88	82.7	20.59	77.8	17.46	66.00	3.09	2.30	27.99	20.87	58.73	43.80
	015	3.08	50.5	23.99	90.7	22.83	86.3	19.39	73.32	3.21	2.40	30.30	22.60	63.56	47.40
	017	3.56	58.3	27.73	104.8	26.44	99.9	23.33	88.2	3.43	2.55	34.81	25.95	73.54	54.84
	020	3.89	63.8	30.34	114.7	29.05	109.8	25.93	98.04	3.58	2.66	37.86	28.23	80.14	59.76
	022 ⁶⁾	4.29	70.3	33.43	126.4	32.14	121.5	29.05	109.8	3.76	2.80	41.47	30.92	80.94	60.36
	025 ^{5,7)}	4.84	79.3	37.71	142.5	36.42	137.6	---	---	4.01	2.99	46.46	34.64	---	---
	028 ^{5,8)}	5.42	88.8	42.23	159.6	40.94	154.7	---	---	4.27	3.18	51.74	38.58	---	---
	031 ^{5,8)}	6.10	100.0	47.56	179.7	46.27	174.9	---	---	4.58	3.41	57.95	43.21	---	---

1) B35-B38 = 280 bar (4060 psi) max.int. 2) B42 = 260 bar (3770 psi) max.int. 3) 045 = 240 bar (3500 psi) max. int. 4) 050 = 240 bar (3000 psi) max. int.
 5) 025-028-031 = 2500 R.P.M. max. 6) 022 = 275 bar max. int. 7) 025 = 240 bar max. int. 8) 028-031 = 210 bar (3000 psi) max. int.

-- Not to use because internal leakage greater than 50% of theoretical flow


INTERNAL LEAKAGE (TYPICAL)

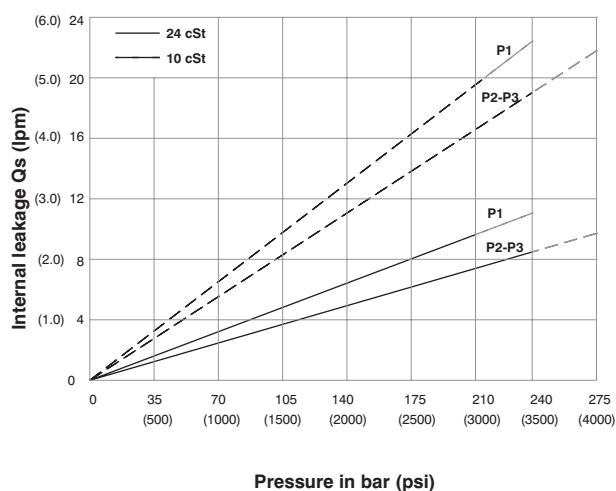

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.


NOISE LEVEL (TYPICAL)

VT7QDCC- B31-022-022

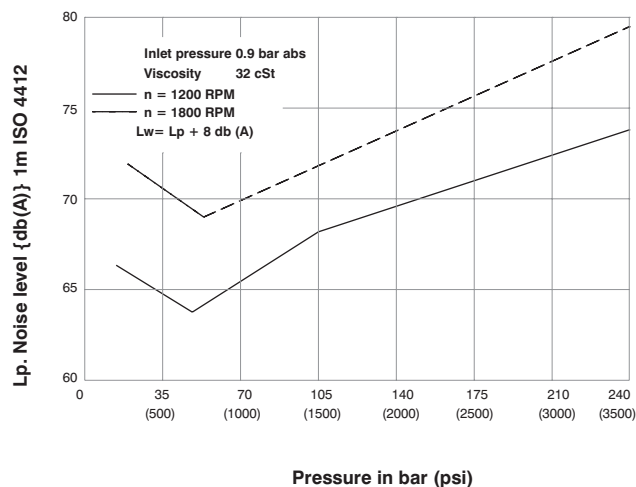


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECAHNICAL POWER LOSS (TYPICAL)

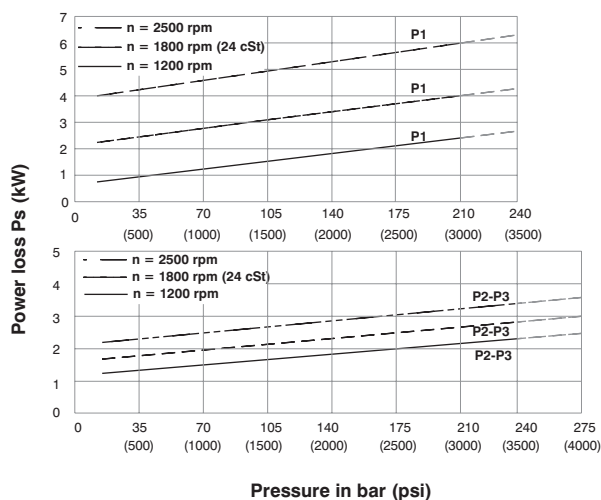


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

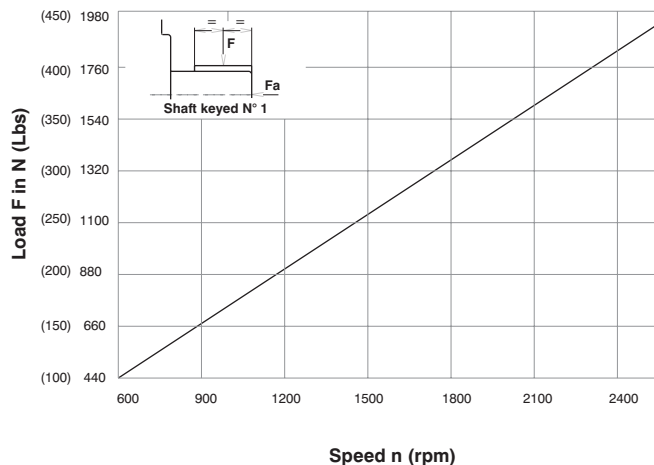

Maximum axial load permissible $F_a = 1200$ N (270 Lbs)

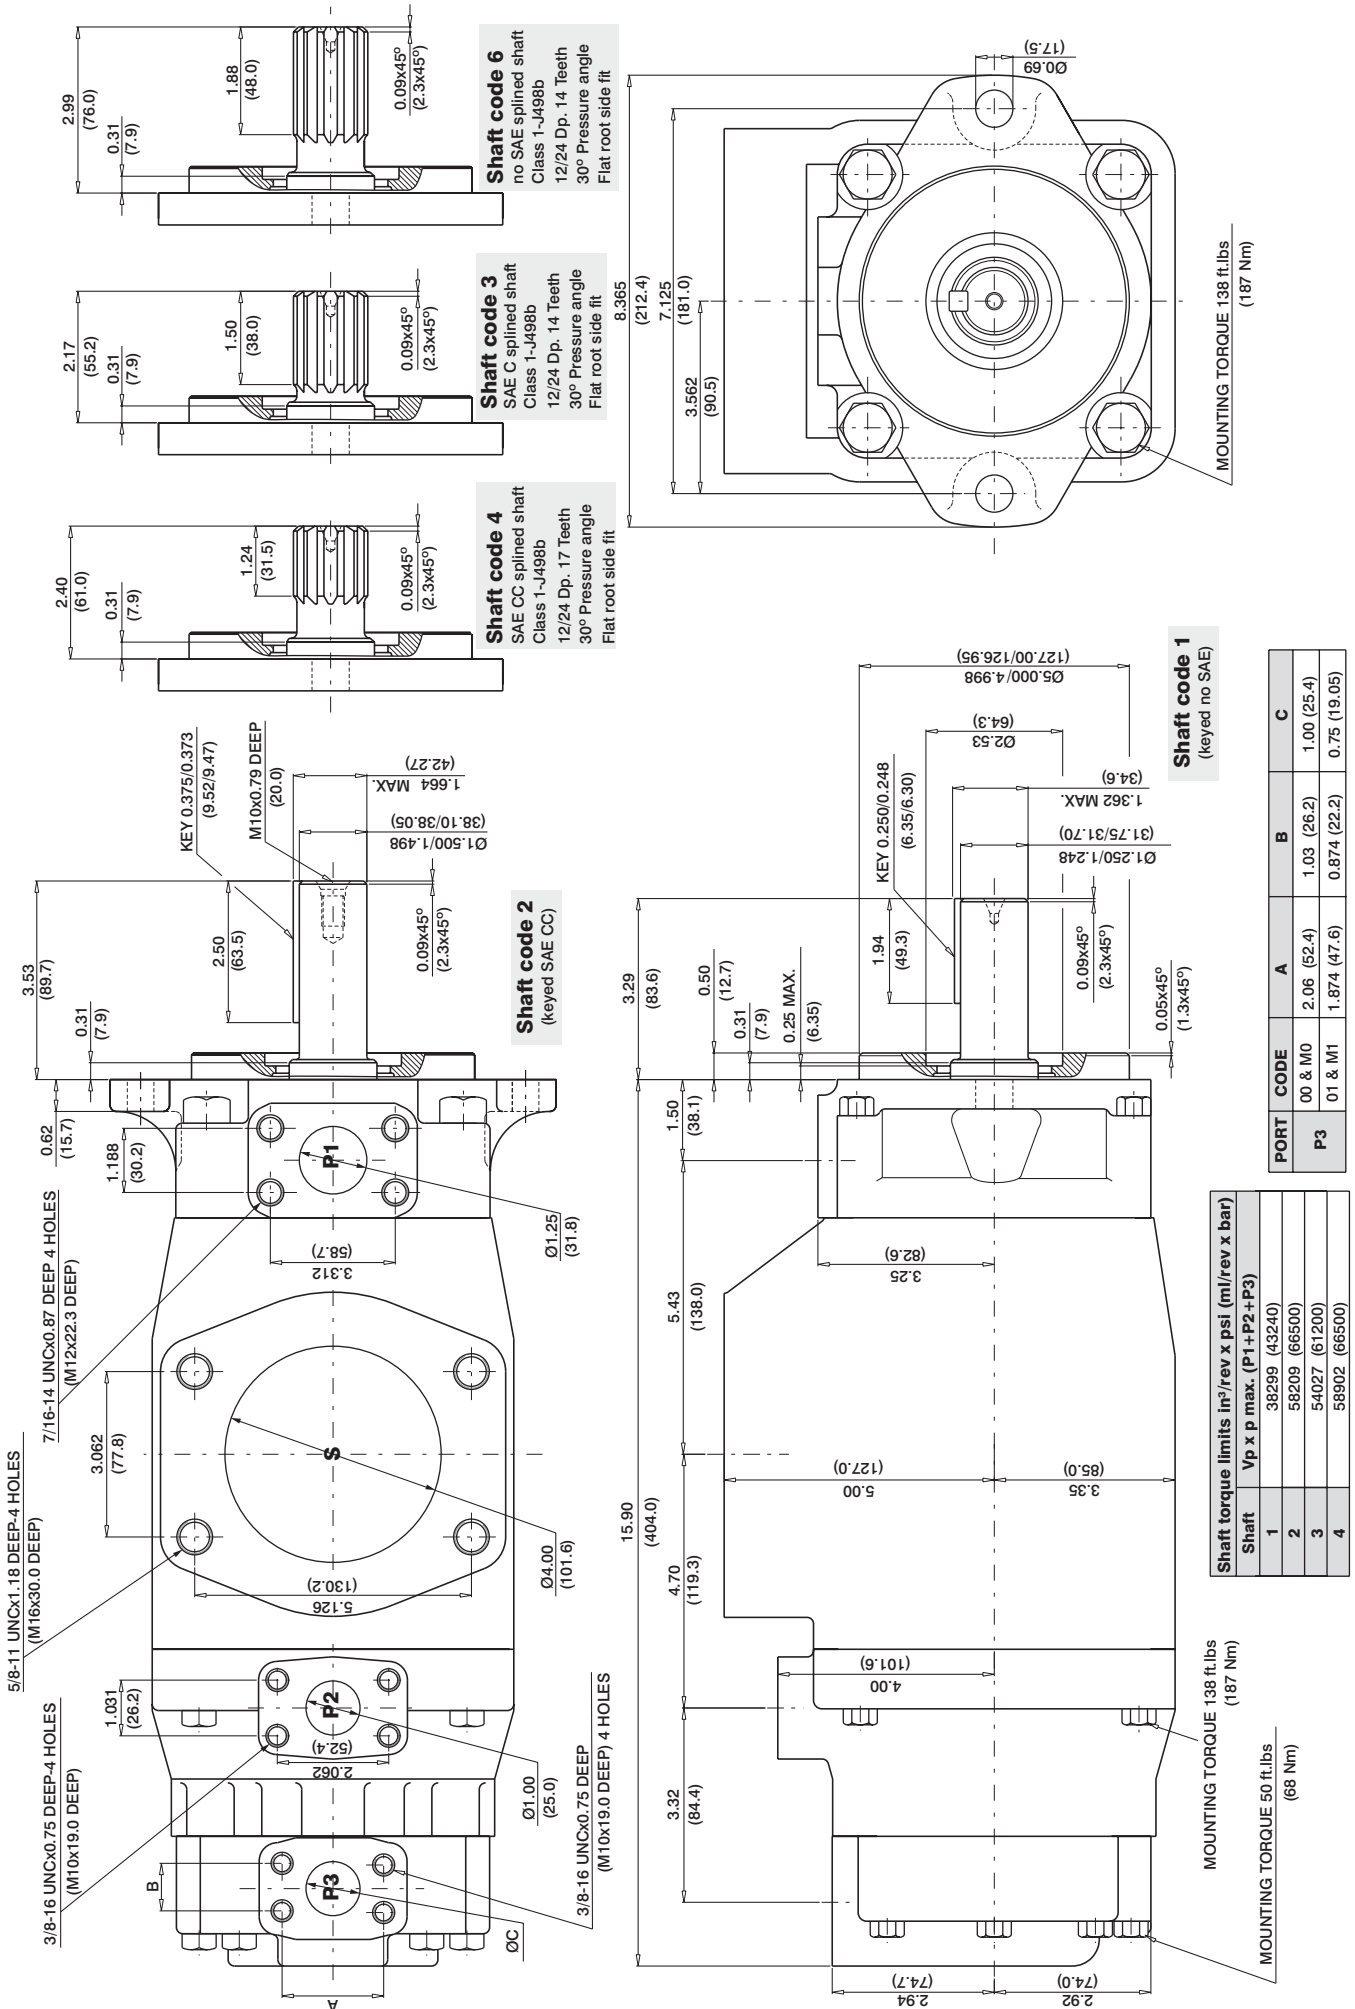

VT7DDB or VT7DDBS - 050 - B28 - B10 - 1 R 00 - A 1 - 00 *

VT7DDB series-125 B4 HW
ISO 4 bolts ³ 019-2 mounting flange

VT7DDBS series- SAE C 6 bolts
Mounting flange J744

Cam ring for "P1" & "P2"

Volumetric displacement cm³/rev (in³/rev)

B14 = 4 ³ .9 (2.68)	B ³ 1 = 99.1 (6.05)
B17 = 55.0 (³ . ³ 6)	B ³ 5 = 11 ³ .4 (6.92)
B20 = 66.0 (4.0 ³)	B ³ 8 = 120.6 (7. ³ 6)
B22 = 70. ³ (4.29)	B42 = 1 ³ 7.5 (8. ³ 9)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0. ³ 5)	B09 = 28.0 (1.71)
B0 ³ = 9.8 (0.60)	B10 = ³ 1.8 (1.94)
B04 = 12.8 (0.78)	B11 = ³ 4.9 (2.1 ³)
B05 = 15.9 (0.97)	B12 = 40.9 (2.50)
B06 = 19.8 (1.21)	B14 = 45.1 (2.75)
B07 = 22.5 (1. ³ 7)	B15 = 50.0 (³ . 05)
B08 = 24.9 (1.52)	

Type of Shaft VT7DDBS

- 1 - Keyed (SAE C)
- 2 - Keyed (SAE CC)
- ³ - Splined (SAE C)
- 4 - Splined (SAE CC)

Type of Shaft VT7DDB-VT7DDBS

- 5 - Keyed (ISO R775-G³ 8M)

Modifications

Mounting w/connection variables
4 bolts SAE flange (J518)

P1 & P2 = 1"1/4 S = 4"			
	P3	UNC	METRIC
VT7DDB	1"		M0
VT7DDB	³ /4"		M1
VT7DDBS	1"	00	M0
VT7DDBS	³ /4"	01	M1

Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation
(view on shaft end)


- R - Clockwise
- L - Counter - clockwise

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1 & P2	B14	2.68	43.9	20.92	79.1	19.18	72.5	17.81	67.3	3.46	2.6	27.77	20.7	47.03	35.1
	B17	3.36	55.0	26.16	98.8	24.41	92.3	23.04	87.0	3.77	2.8	33.88	25.3	57.71	43.0
	B20	4.03	66.0	31.39	118.6	29.64	112.0	28.27	106.8	4.07	3.0	39.98	29.8	68.39	51.0
	B22	4.29	70.3	33.43	126.4	31.69	119.8	30.32	104.6	4.19	3.1	42.37	31.6	72.57	54.1
	B24	4.95	81.1	38.57	145.8	36.82	139.2	35.45	134.0	4.49	3.4	48.36	36.1	83.06	61.9
	B28	5.49	89.9	42.80	161.8	41.06	155.2	39.69	150.0	4.74	3.5	53.30	39.7	91.70	68.4
	B31	6.05	99.1	47.18	178.3	45.43	171.7	44.06	166.5	4.99	3.7	58.41	43.6	100.63	75.0
	B35 ¹⁾	6.92	113.4	53.93	203.9	52.18	197.2	50.81	192.0	5.39	4.0	66.29	49.4	114.42	85.3
	B38 ²⁾	7.36	120.6	57.35	216.8	55.61	210.2	54.24	204.9	5.59	4.2	70.28	52.4	121.42	90.5
	B42 ²⁾	8.39	137.5	65.39	247.2	63.65	240.6	62.28	235.4	6.05	4.5	79.66	59.4	137.83	102.8
	045 ³⁾	8.89	145.7	69.29	262.0	67.11	253.6	65.31	246.8	6.74	5.0	83.75	62.4	145.79	108.7
	050 ⁴⁾	9.64	157.9	75.14	284.0	72.96	275.8	71.78	271.3	7.08	5.3	90.58	67.5	134.50	100.3
P3				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	3.0	8.10	6.0
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.7	12.93	9.6
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.9	16.55	12.3
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.2	20.29	15.1
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.8	25.00	18.6
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.9	28.26	21.1
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.95	14.62	10.9	31.15	23.2
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.2	34.92	26.1
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.10	18.45	13.8	39.48	29.4
	B11 ⁵⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.16	20.17	15.0	43.22	32.2
	B12 ⁵⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.6	50.58	37.7
	B14 ⁵⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.2	55.48	41.4
	B15 ⁵⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.45	28.55	21.3	57.35	42.7

1) B35-B38 = 280 bar (4060 psi) max.int. 2) B42 = 260 bar (3770 psi) max.int. 3) 045 = 240 bar (3500 psi) max. int. 4) 050 = 210 bar (3000 psi) max. int.
5) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm


INTERNAL LEAKAGE (TYPICAL)

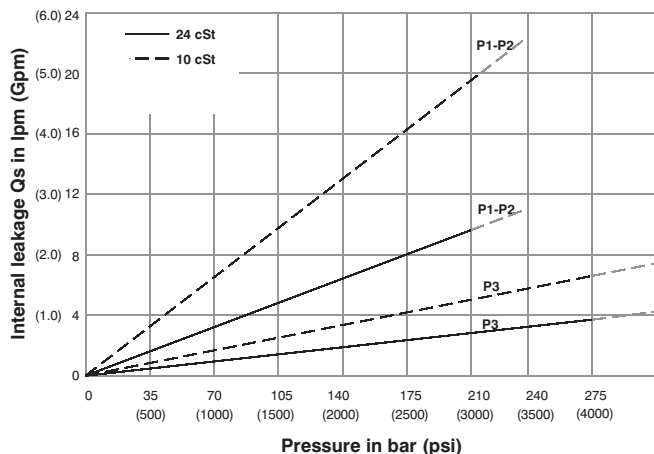

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.


NOISE LEVEL (TYPICAL)

VT7DDB- B31-B31-B10

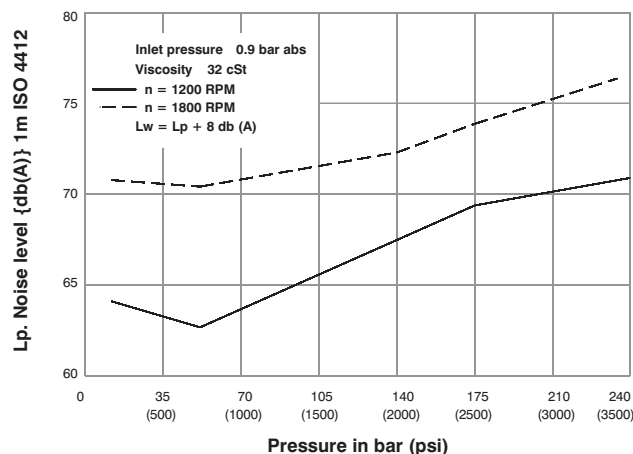


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

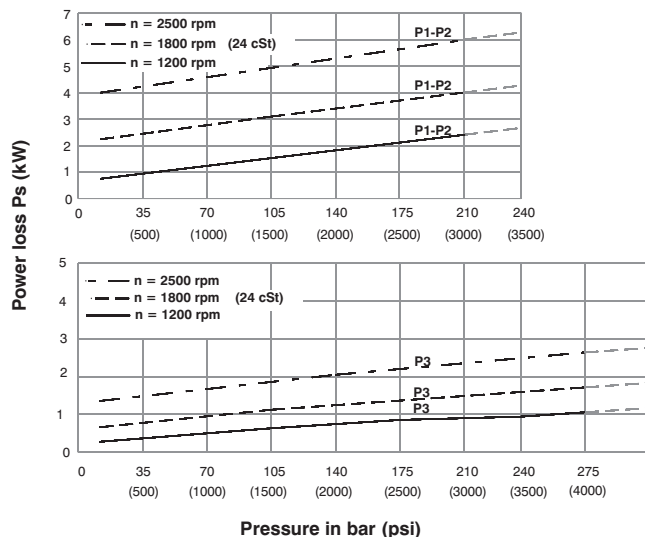

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

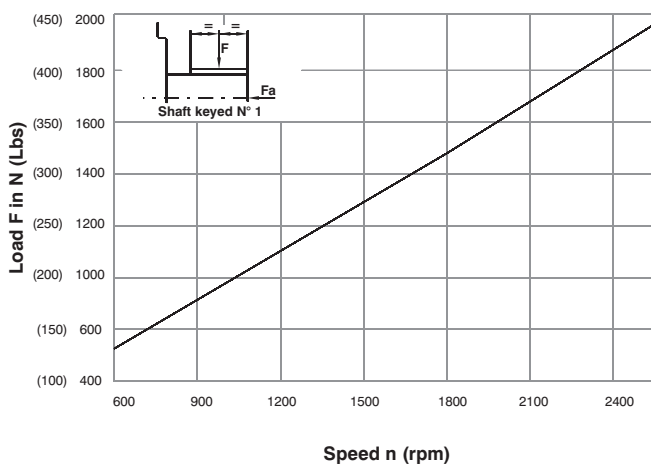

Maximum permissible axial load F_a = 1200 N (270 Lbs)



Shaft code 5
(Keyed ISO R775 - G38M)

Shaft code 2
(Keyed SAE CC)

Shaft code 3
SAE C splined shaft
Class 1-J498b
12/24 dp. 14 teeth
30° pressure angle
flat root side fit



Shaft code 4

Alternate connect variables		
	00 & M0	01 & M1
A	1.03 (26.2)	0.874 (22.2)
B	2.06 (52.4)	1.874 (47.6)
C	1.00 (25.4)	0.75 (19.05)

Series	ØS		ex45°	Alternate mounting flange			ØD1	K2	ØD2
	MAX.	Min.		W	K1				
VT7DDB	4.921 (124.99)	4.919 (124.94)	0.079 (2.0)	0.374 (9.49)	7.087 (180.0)		0.709 (18.0)	4.454 (113.1)	0.551 (13.9)
VT7DDBS	5.00 (127.00)	4.998 (126.94)	0.059 (1.5)	0.50 (12.7)	7.126 (181.0)		0.689 (17.5)	4.508(114.5)	0.563 (14.3)

Shaft	Vp x p max. (P1 + P2 + P3)
1	38299 (43240)
2	64044 (72378)
3	54207 (61200)
4	58902 (66567)
5	47033 (53153)

VT7EDB or VT7EDBS - 062 - B28 - B10 - 1 R 00 - A 1 - 00 *

VT7EDB series-250 B4 HW
ISO 4 bolts $\varnothing$ 019-2 mounting flange
VT7EDBS series- SAE E 4 bolts
Mounting flange J744

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

042 = 1 ³ 2.2 (8.07)	057 = 18 ³ .2 (11.18)
045 = 142.5 (8.70)	062 = 196.6 (12.0)
050 = 158.5 (9.67)	066 = 21 ³ .0 (1 ³ .0)
052 = 16 ³ .8 (10.0)	072 = 227.1 (1 ³ .86)
054 = 170.9 (10.4 ³)	085 = 268.7 (16.40)

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

B14 = 4 ³ .9 (2.68)	B ³ 1 = 99.1 (6.05)
B17 = 55.0 (3.3 ⁶)	B ³ 5 = 11 ³ .4 (6.92)
B20 = 66.0 (4.0 ³)	B ³ 8 = 120.6 (7.3 ⁶)
B22 = 70.3 (4.29)	B42 = 1 ³ 7.5 (8.3 ⁹)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.3 ⁵)	B08 = 24.9 (1.52)	B12 = 40.9 (2.50)
B0 ³ = 9.8 (0.60)	B07 = 22.5 (1.3 ⁷)	B14 = 45.1 (2.75)
B04 = 12.8 (0.78)	B09 = 28.0 (1.71)	B15 = 50.0 (3.05)
B05 = 15.9 (0.97)	B10 = 3 ¹ .8 (1.94)	
B06 = 19.8 (1.21)	B11 = 3 ⁴ .9 (2.1 ³)	

Modifications

Mounting w/connection variables

4 bolts SAE flange (J518)

P1=1-1/2"	P2=1-1/4"	S = 4"
P3	UNC	METRIC
VT7EDB	1"	M0
VT7EDB	3/4"	M1
VT7EDBS	1"	M0
VT7EDBS	3/4"	M1

Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation
(view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft VT7EDB

- 1 - Keyed (G45N-ISO $\varnothing$ 019-2)

Type of Shaft VT7EDBS


- 2 - Keyed (SAE D & E)
- 3 - Splined (SAE D & E)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.2	62.92	237.8	60.37	228.2	58.52	221.2	8.09	6.03	78.44	58.49	133.80	99.77
	045	8.70	142.5	67.72	255.9	65.17	246.3	63.32	239.3	8.37	6.24	84.04	62.66	143.60	107.08
	050	9.67	158.5	75.38	284.9	72.83	275.3	70.98	268.3	8.82	6.58	92.97	69.32	159.24	118.75
	052	10.00	163.8	78.37	296.2	75.82	286.6	73.97	279.6	8.99	6.70	96.47	71.93	165.36	123.31
	054	10.43	170.9	81.27	307.2	78.72	297.6	76.87	290.6	9.17	6.83	99.75	74.38	177.46	132.33
	057	11.18	183.2	87.12	329.3	84.57	319.7	82.72	312.7	9.51	7.09	106.57	79.46	189.84	141.56
	062	12.00	196.6	93.54	353.6	90.99	343.9	89.14	336.9	9.88	7.36	114.17	85.13	196.34	146.41
	066	13.00	213.0	101.44	383.4	98.89	373.8	97.04	366.8	10.34	7.71	123.38	92.00	212.46	158.43
	072	13.86	227.1	108.00	408.2	105.45	398.6	103.60	391.6	10.72	7.99	131.04	97.71	225.86	168.42
	085 ¹⁾	16.40	268.7	127.79	483.0	126.13	476.7	--	--	11.88	8.85	101.66	75.80	--	--
P2				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
	B14	2.68	43.9	20.92	79.1	19.18	72.5	17.81	67.3	3.46	2.6	27.77	20.7	47.03	35.07
	B17	3.36	55.0	26.16	98.8	24.41	92.3	23.04	87.0	3.77	2.8	33.88	25.3	57.71	43.03
	B20	4.03	66.0	31.39	118.6	29.64	112.0	28.27	106.8	4.07	3.0	39.98	29.8	68.39	50.99
	B22	4.29	70.3	33.43	126.4	31.69	119.8	30.32	104.6	4.19	3.1	42.37	31.6	72.57	54.12
	B24	4.95	81.1	38.57	145.8	36.82	139.2	35.45	134.0	4.49	3.4	48.36	36.1	83.06	61.93
	B28	5.49	89.9	42.80	161.8	41.06	155.2	39.69	150.0	4.74	3.5	53.30	39.7	91.70	68.38
	B31	6.05	99.1	47.18	178.3	45.43	171.7	44.06	166.5	4.99	3.7	58.41	43.6	100.63	75.03
	B35 ²⁾	6.92	113.4	53.93	203.9	52.18	197.2	50.81	192.0	5.39	4.0	66.29	49.4	114.42	85.32
	B38 ²⁾	7.36	120.6	57.35	216.8	55.61	210.2	54.24	204.9	5.59	4.2	70.28	52.4	121.42	90.54
	B42 ³⁾	8.39	137.5	65.39	247.2	63.65	240.6	62.28	235.4	6.05	4.5	79.66	59.4	137.83	102.77
	045 ⁴⁾	8.89	145.7	69.29	262.0	67.11	253.6	65.31	246.8	6.74	5.0	83.75	62.4	145.79	108.71
P3	050 ⁵⁾	9.64	157.9	75.14	284.0	72.96	275.8	71.78	271.3	7.08	5.3	90.58	67.5	134.50	100.3
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.04
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.65	12.93	9.64
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	12.34
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	15.13
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	18.64
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	21.07
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.95	14.62	10.90	31.15	23.23
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.02	16.35	12.19	34.92	26.03
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.09	18.45	13.76	39.48	29.44
	B11 ⁶⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.16	20.17	15.04	43.22	32.22
	B12 ⁶⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁶⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.23	55.48	41.37
	B15 ⁶⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76


1) 085 = 90 bar (1300 psi) max.int. & 085 = 2000 rpm max. 2) B35-B38 = 280 bar (4060 psi) max.int. 3) B42 = 260 bar (3770 psi) max.int. 4) 045 = 240 bar (3500 psi) max. int.
5) 050 = 210 bar (3000 psi) max. int 6) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm

INTERNAL LEAKAGE (TYPICAL)

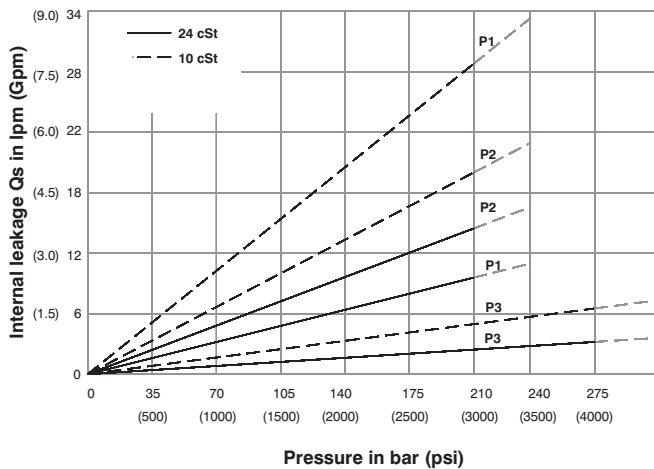


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

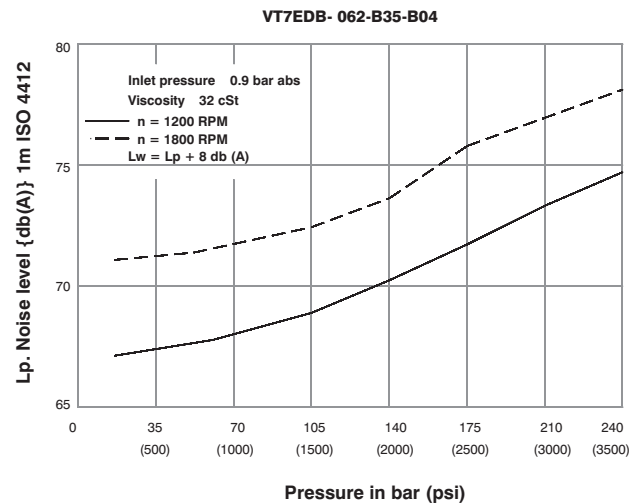


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)


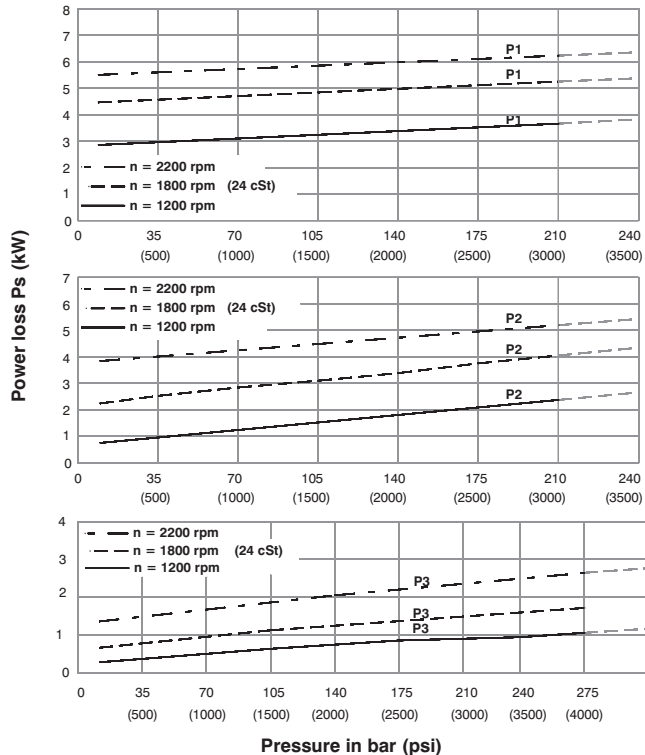


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

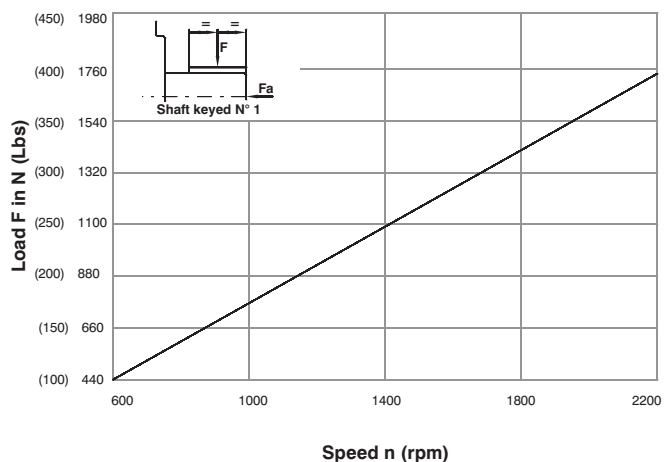

Maximum permissible axial load $F_a = 2000 \text{ N (449 Lbs)}$

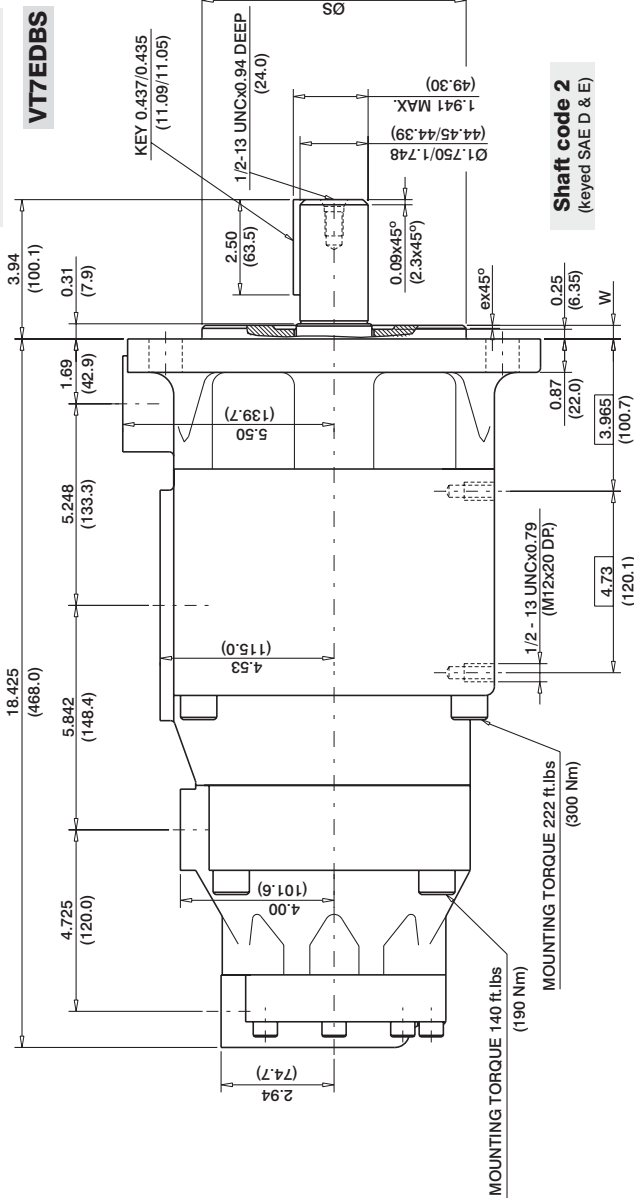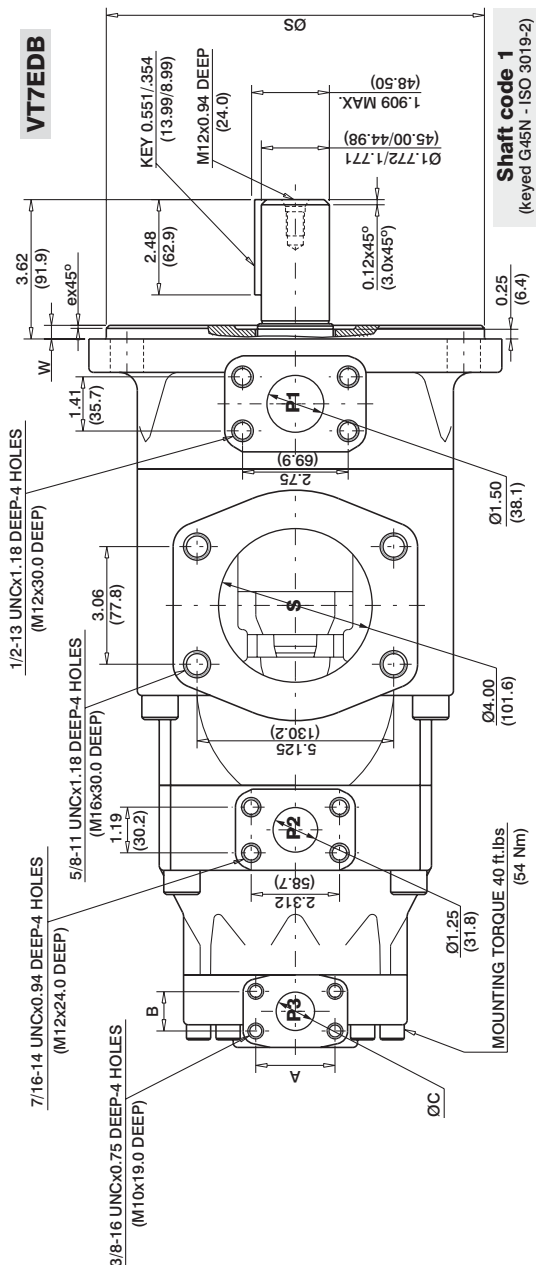

Series	Alternate mounting flange				
	ØS	ex45°	W	K	ØD
VT7EDB	MAX. 9.842 (250.0)	0.079 (2.0)	0.354 (8.99)	12.401 (315.0)	0.866 (21.99)
VT7EDBS	6.50 (165.10)	0.079 (2.0)	0.354 (8.99)	8.838 (224.5)	0.811 (20.59)

Shaft	Vp x p max. (P1+P2+P3)
1	101506 (114715)
2	104818 (118458)
3	112312 (126928)

PORT CODE	A	B	ØC
00&M0	2.06 (52.4)	1.03 (26.2)	1.00 (25.4)
P3	01&M1 1.874 (47.6)	0.874 (22.2)	0.75 (19.0)



VT7QEDC or VT7QEDCS - 062 - B28 - B10 - 1 R 00-A 1 - 00 *

VT7QEDC series-250 B4 HW
ISO 2 bolts 3019-2 mounting flange

VT7QEDCS series- SAE E 4 bolts
Mounting flange J744

Cam ring for "P2"Volumetric displacement cm³/rev (in³/rev)

042 = 132.2 (8.07)	057 = 183.2 (11.18)
045 = 142.5 (8.77)	062 = 196.6 (12.00)
050 = 158.5 (9.67)	066 = 213.0 (13.00)
052 = 163.8 (10.00)	072 = 226.1 (13.86)
054 = 170.9 (10.43)	085 = 268.7 (16.40)

Cam ring for "P3"Volumetric displacement cm³/rev (in³/rev)

B14 = 43.9 (2.68)	B31 = 99.1 (6.05)
B17 = 55.0 (3.36)	B35 = 113.4 (6.92)
B20 = 66.0 (4.03)	B38 = 120.6 (7.36)
B22 = 70.3 (4.29)	B42 = 137.5 (8.39)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Cam ring for "P3"Volumetric displacement cm³/rev (in³/rev)

* 003/B03/Y03 = 10.8 (0.66)	015/B15/Y15 = 50.5 (3.08)
005/B05/Y05 = 17.2 (1.05)	017/B17/Y17 = 58.3 (3.56)
006/B06/Y06 = 21.3 (1.30)	020/B20/Y20 = 63.8 (3.89)
008/B08/Y08 = 26.4 (1.61)	022/B22/Y22 = 70.3 (4.29)
010/B10/Y10 = 34.1 (2.08)	025/B25/Y25 = 79.3 (4.84)
012/B12/Y12 = 37.1 (2.26)	028/B28/Y28 = 88.8 (5.42)
014/B14/Y14 = 46.0 (2.81)	031/B31/Y31 = 100.0 (6.10)

*'0' - Uni - directional 'B' - Bi - directional 'Y' - Bi - directional for cold start

Modifications**Mounting w/connection variables**

4 bolts SAE flange (J518)

P1 = 1½"	P2 = 1¼"	S = 4"
P3	UNC	METRIC
VT7QEDC	1"	M0
VT7QEDC	3/4"	M1
VT7QEDCS	1"	M0
VT7QEDCS	3/4"	M1

Seal class

- 1 - S1(for minreal oil)
- 4 - S4(for fire resistant fluids)
- 5 - S5(for mineral oil and fire resistant fluids)

Design letter**Porting combination (see page CI-1-4,5)**

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft VT7QEDC

- 1 - Keyed (G45N-ISO 3019-2)

Type of Shaft VT7QEDCS

- 2 - Keyed (SAE D & E)
- 3 - Splined (SAE D & E)


OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
		in ³ /rev	cm ³ /rev	p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.2	62.92	237.8	60.37	228.2	58.52	221.2	8.09	6.03	78.44	58.49	133.80	99.77
	045	8.70	142.5	67.72	255.9	65.17	246.3	63.32	239.3	8.37	6.24	84.04	62.66	143.60	107.08
	050	9.67	158.5	75.38	284.9	72.83	275.3	70.98	268.3	8.82	6.58	92.97	69.32	159.24	118.75
	052	10.00	163.8	78.37	296.2	75.82	286.6	73.97	279.6	8.99	6.70	96.47	71.93	165.36	123.31
	054	10.43	170.9	81.27	307.2	78.72	297.6	76.87	290.6	9.17	6.83	99.75	74.38	177.46	132.33
	057	11.18	183.2	87.12	329.3	84.57	319.7	82.72	312.7	9.51	7.09	106.57	79.46	189.84	141.56
	062	12.00	196.6	93.54	353.6	90.99	343.9	89.14	336.9	9.88	7.36	114.17	85.13	196.34	146.41
	066	13.00	213.0	101.44	383.4	98.89	373.8	97.04	366.8	10.34	7.71	123.38	92.00	212.46	158.43
	072	13.86	227.1	108.00	408.2	105.45	398.6	103.60	391.6	10.72	7.99	131.04	97.71	225.86	168.42
	085 ¹⁾	16.40	268.7	127.79	483.0	126.13	476.7	-	-	11.88	8.85	101.66	75.80	-	-
P2				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
	B14	2.68	43.9	20.92	79.1	19.18	72.5	17.81	67.3	3.46	2.60	27.77	20.7	47.03	35.07
	B17	3.36	55.0	26.16	98.8	24.41	92.3	23.04	87.0	3.77	2.80	33.88	25.3	57.71	43.03
	B20	4.03	66.0	31.39	118.6	29.64	112.0	28.27	106.8	4.07	3.00	39.98	29.8	68.39	50.99
	B22	4.29	70.3	33.43	126.4	31.69	119.8	30.32	104.6	4.19	3.10	42.37	31.6	72.57	54.12
	B24	4.95	81.1	38.57	145.8	36.82	139.2	35.45	134.0	4.49	3.40	48.36	36.1	83.06	61.93
	B28	5.49	89.9	42.80	161.8	41.06	155.2	39.69	150.0	4.74	3.50	53.30	39.7	91.70	68.38
	B31	6.05	99.1	47.18	178.3	45.43	171.7	44.06	166.5	4.99	3.70	58.41	43.6	100.63	75.03
	B35 ²⁾	6.92	113.4	53.93	203.9	52.18	197.2	50.81	192.0	5.39	4.00	66.29	49.4	114.42	85.32
	B38 ²⁾	7.36	120.6	57.35	216.8	55.61	210.2	54.24	204.9	5.59	4.20	70.28	52.4	121.42	90.54
	B42 ³⁾	8.39	137.5	65.39	247.2	63.65	240.6	62.28	235.4	6.05	4.50	79.66	59.4	137.83	102.77
	045 ⁴⁾	8.89	145.7	69.29	262.0	67.11	253.6	65.31	246.8	6.74	5.00	83.75	62.4	145.79	108.71
	050 ⁵⁾	9.64	157.9	75.14	284.0	72.96	275.8	71.78	271.3	7.08	5.30	90.58	67.5	154.50	116.30
P3				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	003	0.66	10.8	5.14	19.6	3.85	14.6	--	--	2.11	1.57	8.45	6.30	--	--
	005	1.05	17.2	8.18	30.9	6.89	26.0	4.34	16.44	2.29	1.70	12.00	8.94	23.97	17.88
	006	1.30	21.3	10.13	38.3	8.84	33.4	5.71	21.6	2.40	1.78	14.28	10.64	28.96	21.60
	008	1.61	26.4	12.55	47.4	11.26	42.6	8.12	30.72	2.54	1.89	17.11	12.75	35.08	26.16
	010	2.08	34.1	16.22	61.3	14.93	56.4	11.81	44.64	2.76	2.06	21.38	15.94	44.25	33.00
	012	2.26	37.1	17.64	66.7	16.35	61.8	13.24	50.04	2.84	2.11	23.05	17.18	47.47	35.40
	014	2.81	46.0	21.88	82.7	20.59	77.8	17.46	66.00	3.09	2.30	27.99	20.87	58.73	43.80
	015	3.08	50.5	23.99	90.7	22.83	86.3	19.39	73.32	3.21	2.40	30.30	22.60	63.56	47.40
	017	3.56	58.3	27.73	104.8	26.44	99.9	23.33	88.2	3.43	2.55	34.81	25.95	73.54	54.84
	020	3.89	63.8	30.34	114.7	29.05	109.8	25.93	98.04	3.58	2.66	37.86	28.23	80.14	59.76
	022 ⁷⁾	4.29	70.3	33.43	126.4	32.14	121.5	29.05	109.8	3.76	2.80	41.47	30.92	80.94	60.36
	025 ^{6,8)}	4.84	79.3	37.71	142.5	36.42	137.6	--	--	4.01	2.99	46.46	34.64	--	--
	028 ^{6,9)}	5.42	88.8	42.23	159.6	40.94	154.7	--	--	4.27	3.18	51.74	38.58	--	--
	031 ^{6,9)}	6.10	100.0	47.56	179.7	46.27	174.9	--	--	4.58	3.41	57.95	43.21	--	--

1) 085 = 90 bar (1300 psi) max.int. & 085 = 2000 rpm max. 2) B35-B38 = 280 bar (4060 psi) max.int. 3) B42 = 260 bar (3770 psi) max.int. 4) 045 = 240 bar (3500 psi) max. int.
5) 050 = 210 bar (3000 psi) max. int. 6) 025-028-031 = 2500 R.P.M. max. 7) 022 = 275 bar max. int. 8) 025 = 240 bar max. Int. 9) 028-031 = 210 bar (3000 psi) max. int.

-- Not to use because internal leakage greater than 50% of theoretical flow


INTERNAL LEAKAGE (TYPICAL)

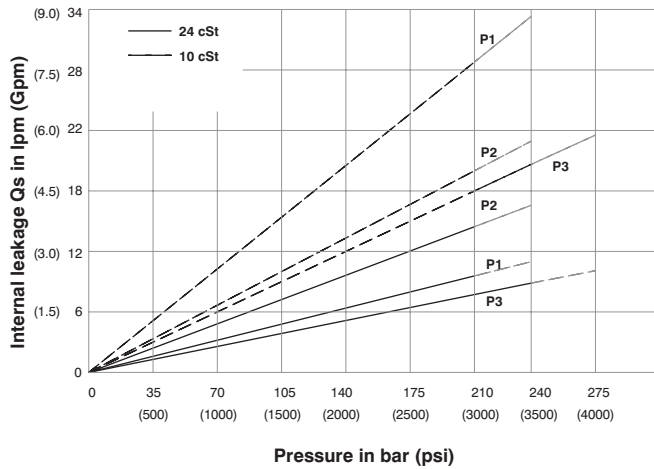

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.


NOISE LEVEL (TYPICAL)

VT7QEDC- 062-B35-022

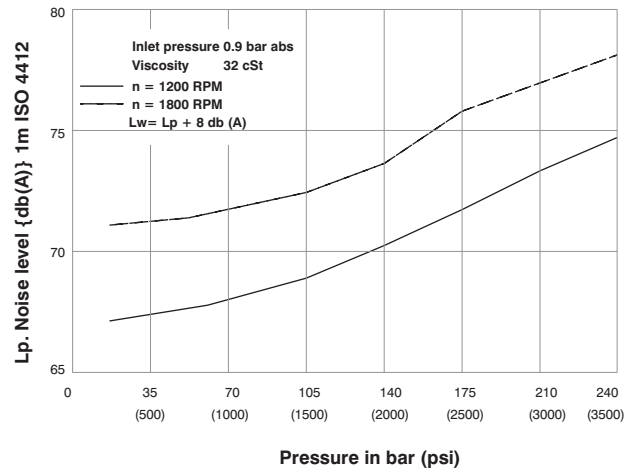


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)



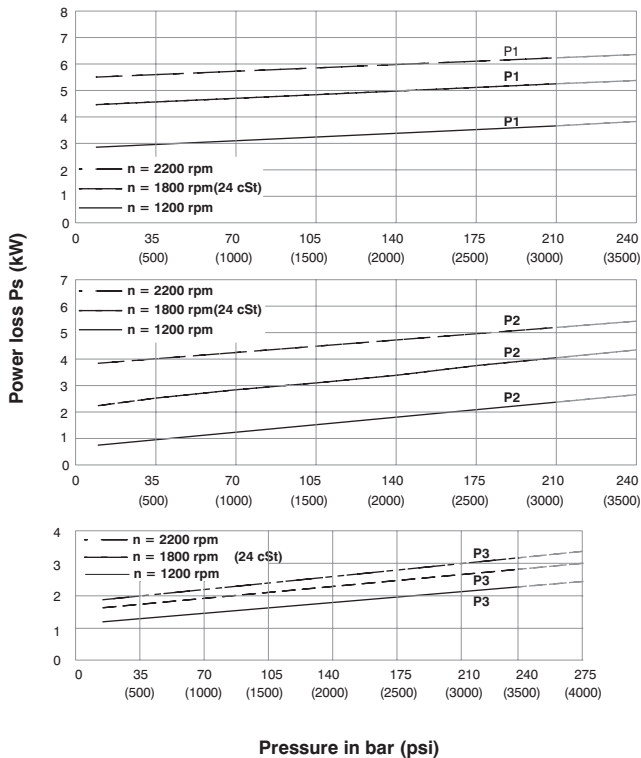


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

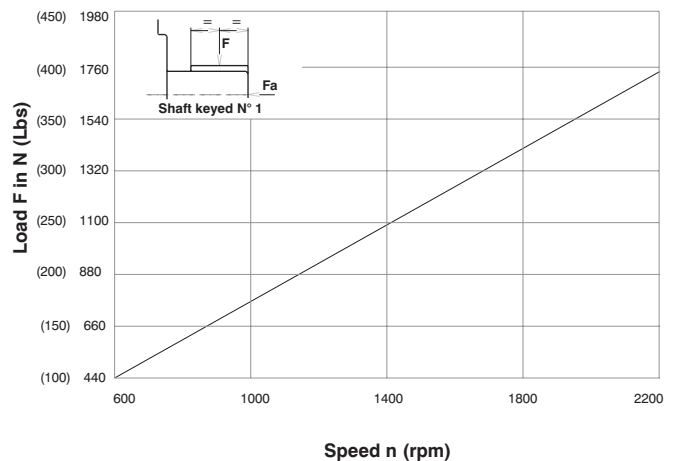

Maximum permissible axial load $F_a = 2000 \text{ N (449 Lbs)}$

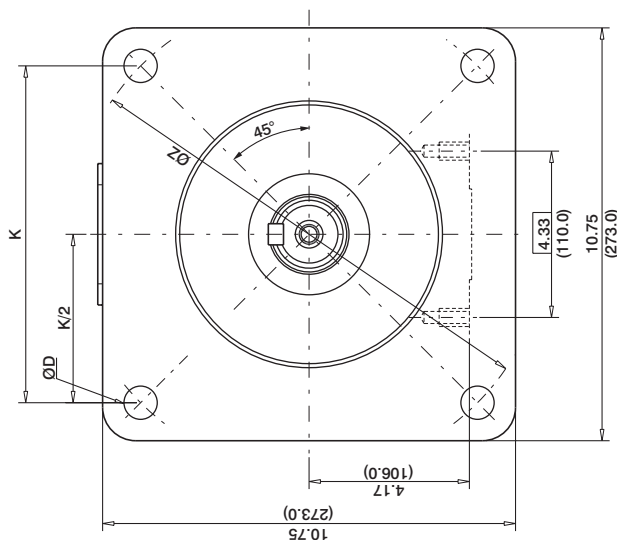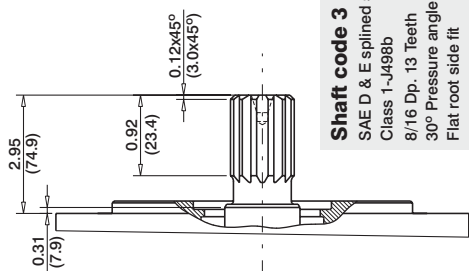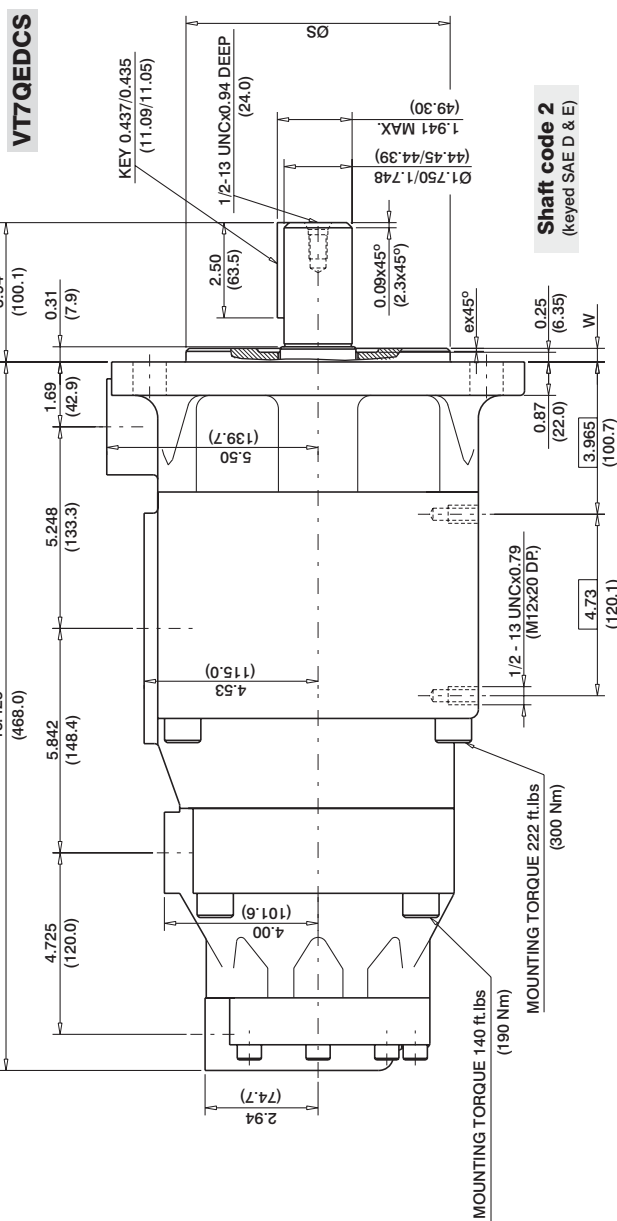

Shaft	Vp x p max. (P1+P2+P3)
1	101506 (114715)
2	104818 (118458)
3	112312 (126928)

Alternate mounting flange						
Series	ØS		ex45°	W	K	ØZ
	MAX.	Min.				
VT7QEDC	9.842 (250.0)	9.840 (249.94)	0.079 (2.0)	0.354 (8.99)		
VT7QEDCS	6.50 (165.10)	6.498 (165.05)	0.079 (2.0)	0.354 (8.99)	8.838 (224.5)	12.401 (315.0)
VT7QEDCS						0.866 (21.99)
VT7QEDCS						0.811 (20.59)

PORT	CODE	A	B	ØC
P3	00&M0	2.06 (52.4)	1.03 (26.2)	1.00 (25.4)
	01&M1	1.874 (47.6)	0.874 (22.2)	0.75 (19.0)

VT67DBB - 038 - B10 - B10 - 1 R 00 - A 1 - M1 - *

Series-SAE C 2 bolts
Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

*014/B14 = 47.6 (2.90) 0³5/B³5 = 111.0 (6.77)
017/B17 = 58.2 (3.55) 0³8/B³8 = 120.3 (7.34)
020/B20 = 66.0 (4.03) 042/B42 = 1³6.0 (8.30)
024/B24 = 79.5 (4.85) 045/B45 = 145.7 (8.89)
028/B28 = 89.7 (5.47) 050/B50 = 158.0 (9.64)
0³1/B³1 = 98.3 (6.00) 061/B61 = 190.5 (11.62)

*0 - Uni - directional 'B' - Bi - directional

Cam ring for "P2" & P3

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.35) B09 = 28.0 (1.71)
B03 = 9.8 (0.60) B10 = 1.8 (1.94)
B04 = 12.8 (0.78) B11 = 4.9 (2.13)
B05 = 15.9 (0.97) B12 = 40.9 (2.50)
B06 = 19.8 (1.21) B14 = 45.1 (2.75)
B07 = 22.5 (1.37) B15 = 50.0 (3.05)
B08 = 24.9 (1.52)

Modifications

Mounting w/connection variables

P1=1/4" P2=1" P3=3/4" S=4"	
UNC	METRIC
01	M1

Seal class

1 - S1 (for mineral oil)
4 - S4 (for fire resistant fluids)
5 - S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation
(view on shaft end)

R - Clockwise
L - Counter - clockwise

Type of Shaft


1 - Keyed (no SAE)
2 - Keyed (SAE CC)
3 - Splined (SAE C)
4 - Splined (SAE CC)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
		in ³ /rev	cm ³ /rev	p = 0 bar (0 psi)	p = 140 bar (2000 psi)	p = 240 bar (3500 psi)	p = 7 bar (100 psi)	p = 140 bar (2000 psi)	p = 240 bar (3500 psi)	p = 0 bar (0 psi)	p = 140 bar (2000 psi)	p = 240 bar (3500 psi)	p = 7 bar (100 psi)	p = 140 bar (2000 psi)	p = 240 bar (3500 psi)
P1	014	2.90	47.6	22.64	85.0	20.46	77.4	18.8	71.1	4.02	2.99	29.31	21.85	49.34	36.79
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.20	49.62	37.0
	020	4.03	66.0	31.39	118.6	29.29	101.4	27.57	104.2	4.53	3.38	39.52	29.47	67.21	50.11
	024	4.85	79.5	37.81	142.8	35.63	134.6	33.99	128.5	4.91	3.66	47.02	35.06	80.32	59.89
	028	5.47	89.7	42.66	161.3	40.48	153.0	38.84	146.8	5.19	3.87	52.68	39.28	90.23	67.28
	031	6.00	98.3	46.75	176.7	44.57	168.5	42.93	162.3	5.43	4.09	57.45	42.84	98.58	73.51
	035	6.77	111.0	52.79	199.6	50.61	191.3	48.97	184.1	5.78	4.31	64.50	48.09	110.91	82.70
	038	7.34	120.3	57.21	216.3	55.03	208.1	53.39	201.8	6.04	4.50	69.66	51.94	111.94	83.47
	042 ¹⁾	8.30	136.0	64.68	244.5	62.50	236.3	60.86	230.1	6.47	4.83	78.37	58.44	135.19	100.81
	045 ¹⁾	8.89	145.7	69.29	261.9	67.11	253.7	65.47	247.5	6.74	5.02	83.75	62.45	144.61	107.83
	050 ^{1,2)}	9.64	158.0	75.14	284.1	72.96	275.8	71.78	271.3	7.08	5.27	90.58	67.54	134.54	100.32
	061 ^{1,3)}	11.62	190.5	75.6	285.8	73.54	278.0	--	--	7.37	5.50	97.49	72.69	--	--
P2 & P3				p = 0 bar (0 psi)	p = 140 bar (2000 psi)	p = 300 bar (4350 psi)	p = 7 bar (100 psi)	p = 140 bar (2000 psi)	p = 300 bar (4350 psi)						
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.40
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.65	12.93	10.25
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	13.13
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	16.12
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	19.88
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	22.47
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.94	14.62	10.90	31.15	24.78
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.19	34.92	27.77
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.11	18.45	13.75	39.48	31.42
	B11 ⁴⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.15	20.17	15.04	43.22	32.22
	B12 ⁴⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁴⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.23	55.48	41.37
	B15 ⁴⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76


1) 042-045-050-061=2200 RPM max. 2) 050=210 bar (3000 psi) max. int. 3) 061 = 120 bar (1740 psi) max. int. 061 = 80 bar (1160 psi) cont.
4) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm

INTERNAL LEAKAGE (TYPICAL)

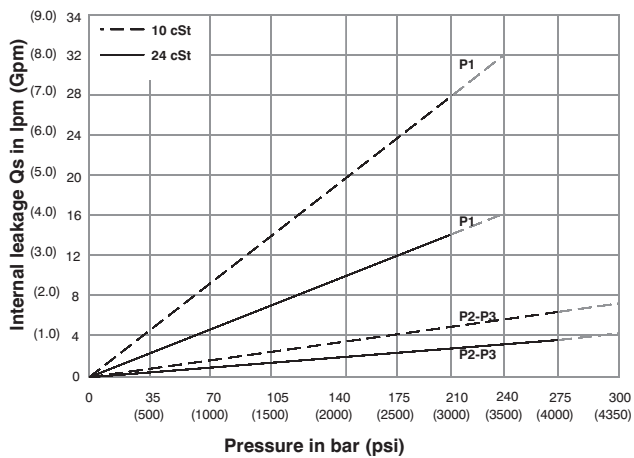


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

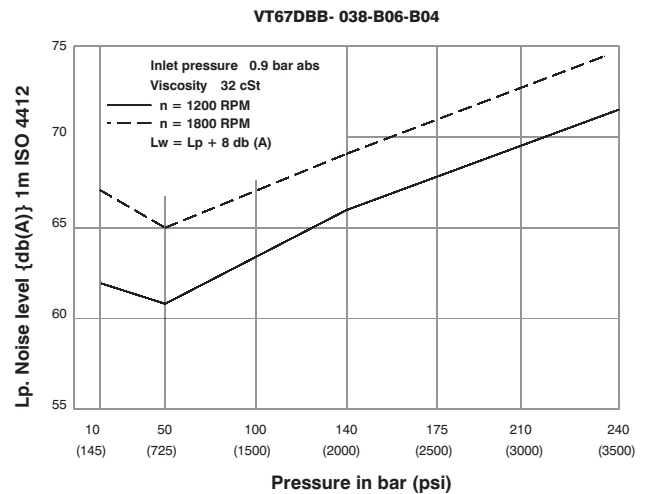


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

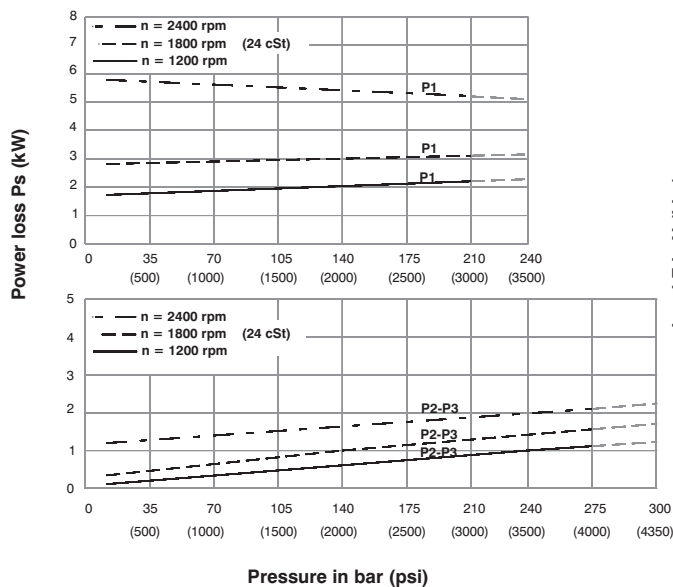

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

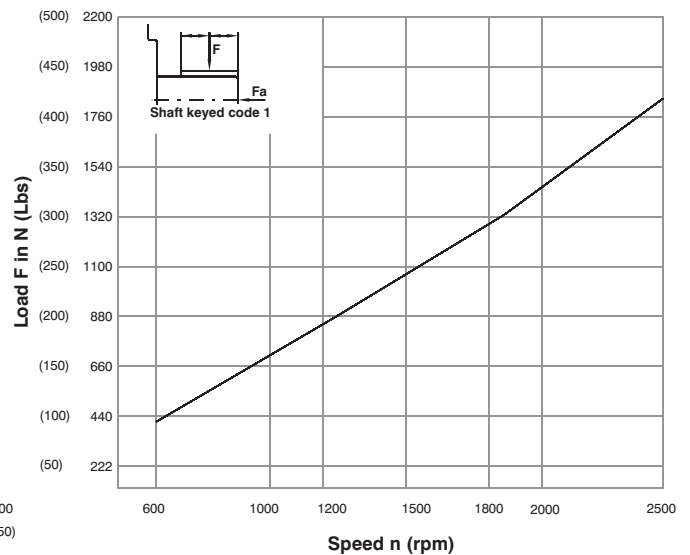

Maximum axial load permissible $F_a = 800$ N (180 Lbs)

VT67DCB - 038 - 028 - B10 - 1 R 00 - A 1 - M1 - *

Series- SAE C 2 bolts
Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

*014/B14 = 47.6 (2.90)	0 ³ 5/B ³ 5 = 111.0 (6.77)
017/B17 = 58.2 (3.55)	0 ³ 8/B ³ 8 = 120.3 (7.34)
020/B20 = 66.0 (4.03)	042/B42 = 1 ³ 6.0 (8.30)
024/B24 = 79.5 (4.85)	045/B45 = 145.7 (8.89)
028/B28 = 89.7 (5.47)	050/B50 = 158.0 (9.64)
0 ³ 1/B ³ 1 = 98.3 (6.00)	061/B61 = 190.5 (11.62)

*0⁰ - Uni - directional 'B' - Bi - directional

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

*00 ³ /B0 ³ = 10.8 (0.66)	015/B15 = 50.5 (3.08)
005/B05 = 17.2 (1.05)	017/B17 = 58.3 (3.56)
006/B06 = 21.3 (1.30)	020/B20 = 63.8 (3.89)
008/B08 = 26.4 (1.61)	022/B22 = 70.3 (4.29)
010/B10 = 34.1 (2.08)	025/B25 = 79.3 (4.84)
012/B12 = 37.1 (2.26)	028/B28 = 88.8 (5.42)
014/B14 = 46.0 (2.81)	0 ³ 1/B ³ 1 = 100.0 (6.10)

*0⁰ - Uni - directional 'B' - Bi - directional

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.35)	B08 = 24.9 (1.52)	B12 = 40.9 (2.50)
B03 = 9.8 (0.60)	B07 = 22.5 (1.37)	B14 = 45.1 (2.75)
B04 = 12.8 (0.78)	B09 = 28.0 (1.71)	B15 = 50.0 (3.05)
B05 = 15.9 (0.97)	B10 = 31.8 (1.94)	
B06 = 19.8 (1.21)	B11 = 34.9 (2.13)	

Modifications**Mounting w/connection variables**

P1=1 1/4"	P2=1"	P3=3/4"	S=4"
UNC	METRIC		
01	M1		

Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter**Porting combination (see page CI-1-4,5)**

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise

Type of Shaft

- 1 - Keyed (no SAE)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
		in ³ /rev	cm ³ /rev	P=0bar(0 psi)		P=140bar(2000psi)		P=240bar(3500 psi)		P=7bar(100psi)		P=140bar(2000psi)		P=240bar(3500 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	014	2.90	47.6	22.64	85.0	20.46	77.4	18.8	71.1	4.02	2.99	29.31	21.85	49.34	36.79
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.50	29.77	22.2	49.62	37.0
	020	4.03	66.0	31.39	118.6	29.29	101.4	27.57	104.2	4.53	3.38	39.52	29.47	67.21	50.11
	024	4.85	79.5	37.81	142.8	35.63	134.6	33.99	128.5	4.91	3.66	47.02	35.06	80.32	59.89
	028	5.47	89.7	42.66	161.3	40.48	153.0	38.84	146.8	5.19	3.87	52.68	39.28	90.23	67.28
	031	6.00	98.3	46.75	176.7	44.57	168.5	42.93	162.3	5.43	4.09	57.45	42.84	98.58	73.51
	035	6.77	111.0	52.79	199.6	50.61	191.3	48.97	184.1	5.78	4.31	64.50	48.09	110.91	82.70
	038	7.34	120.3	57.21	216.3	55.03	208.1	53.39	201.8	6.04	4.50	69.66	51.94	111.94	83.47
	042 ¹⁾	8.30	136.0	64.68	244.5	62.50	236.3	60.86	230.1	6.47	4.83	78.37	58.44	135.19	100.81
	045 ¹⁾	8.89	145.7	69.29	261.9	67.11	253.7	65.47	247.5	6.74	5.02	83.75	62.45	144.61	107.83
	050 ^{1,2)}	9.64	158.0	75.14	284.1	72.96	275.8	71.78	271.3	7.08	5.27	90.58	67.54	134.54	100.32
	061 ^{1,3)}	11.62	190.5	75.6	285.8	73.54	278.0	--	--	7.37	5.50	97.49	72.69	--	--
P2				P=0bar(0 psi)		P=140bar(2000psi)		P=275bar(4000 psi)		P=7bar(100psi)		P=140bar(2000psi)		P=275bar(4000 psi)	
	003	0.66	10.8	5.14	19.6	3.85	14.6	--	--	2.11	1.57	8.45	6.30	--	--
	005	1.05	17.2	8.18	30.9	6.89	26.0	5.68	21.5	2.29	1.70	12.00	8.94	19.81	14.77
	006	1.30	21.3	10.13	38.3	8.84	33.4	7.63	28.8	2.40	1.78	14.28	10.64	23.79	17.74
	008	1.61	26.4	12.55	47.4	11.26	42.6	10.05	37.9	2.54	1.89	17.11	12.75	28.75	21.43
	010	2.08	34.1	16.22	61.3	14.93	56.4	13.71	51.8	2.76	2.06	21.38	15.94	36.22	27.00
	012	2.26	37.1	17.64	66.7	16.35	61.8	15.14	57.2	2.84	2.11	23.05	17.18	39.14	29.18
	014	2.81	46.0	21.88	82.7	20.59	77.8	19.37	73.2	3.09	2.30	27.99	20.87	47.78	35.62
	015	3.08	50.5	23.99	90.7	22.83	86.3	21.56	81.5	3.21	2.40	30.30	22.60	51.36	38.30
	017	3.56	58.3	27.73	104.8	26.44	99.9	25.22	95.3	3.43	2.55	34.81	25.95	59.73	44.54
	020	3.89	63.8	30.34	114.7	29.05	109.8	27.84	105.2	3.58	2.66	37.86	28.23	65.07	48.52
	022 ⁵⁾	4.29	70.3	33.43	126.4	32.14	121.5	30.93	116.9	3.76	2.80	41.47	30.92	71.38	53.22
	025 ^{4,6)}	4.84	79.3	37.71	142.5	36.42	137.6	35.21	133.1	4.01	2.99	46.46	34.64	80.12	59.74
	028 ^{4,7)}	5.42	88.8	42.23	159.6	40.94	154.7	40.32	152.4	4.27	3.18	51.74	38.58	76.73	57.22
	031 ^{4,7)}	6.10	100.0	47.56	179.7	46.27	174.9	45.65	172.5	4.58	3.41	57.95	43.21	86.06	64.17
P3				P=0bar(0 psi)		P=140bar(2000psi)		P=300bar(4350 psi)		P=7bar(100psi)		P=140bar(2000psi)		P=300bar(4350 psi)	
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.40
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.65	12.93	10.25
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	13.13
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	16.12
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	19.88
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	22.47
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.94	14.62	10.90	31.15	24.78
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.19	34.92	27.77
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.11	18.45	13.75	39.48	31.42
	B11 ⁸⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.15	20.17	15.04	43.22	32.22
	B12 ⁸⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁸⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.23	55.48	41.37
	B15 ⁸⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76

1) 042-045-050-061=2200 RPM max. 2) 050=210 bar (3000 psi) max. int. 3) 061 = 120 bar (1740 psi) max. int. 061 = 80 bar (1160 psi) cont. 4) 025-028-031 = 2500 R.P.M. max.

5) 022= 275 bar max. int. 6) 025 = 240 bar max. int. 7) 028-031 = 210 bar (3000 psi) max. int.


8) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm

INTERNAL LEAKAGE (TYPICAL)

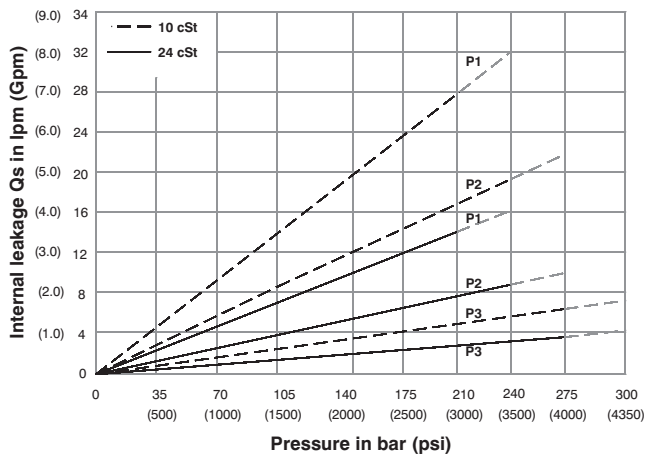


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

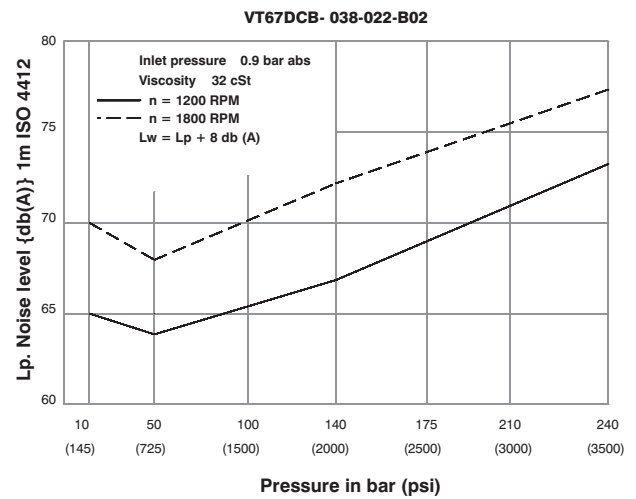


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)




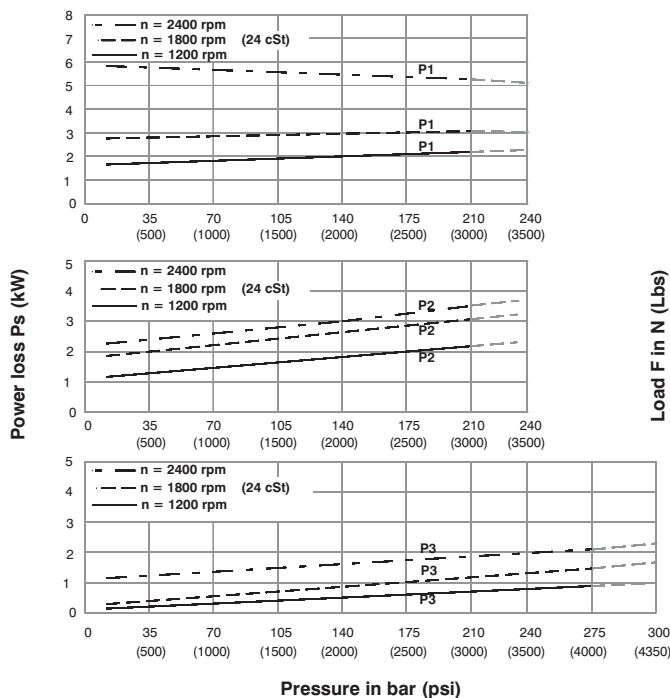


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

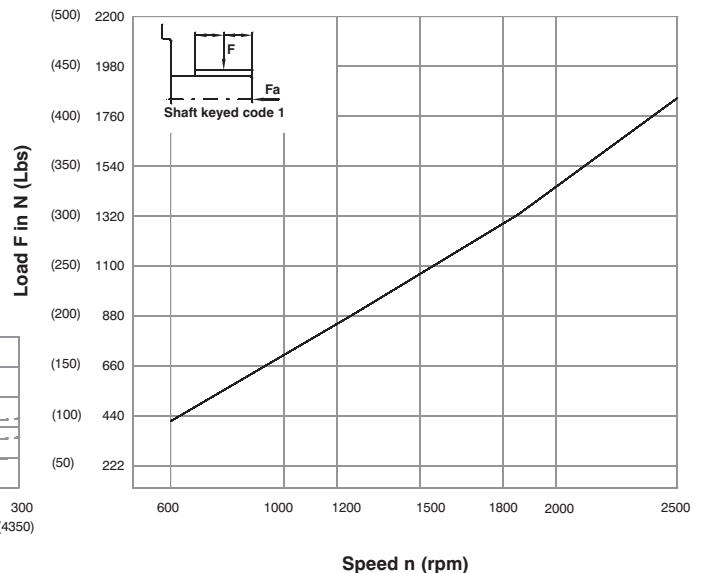

Maximum axial load permissible $F_a = 800\text{N}$ (180 Lbs)

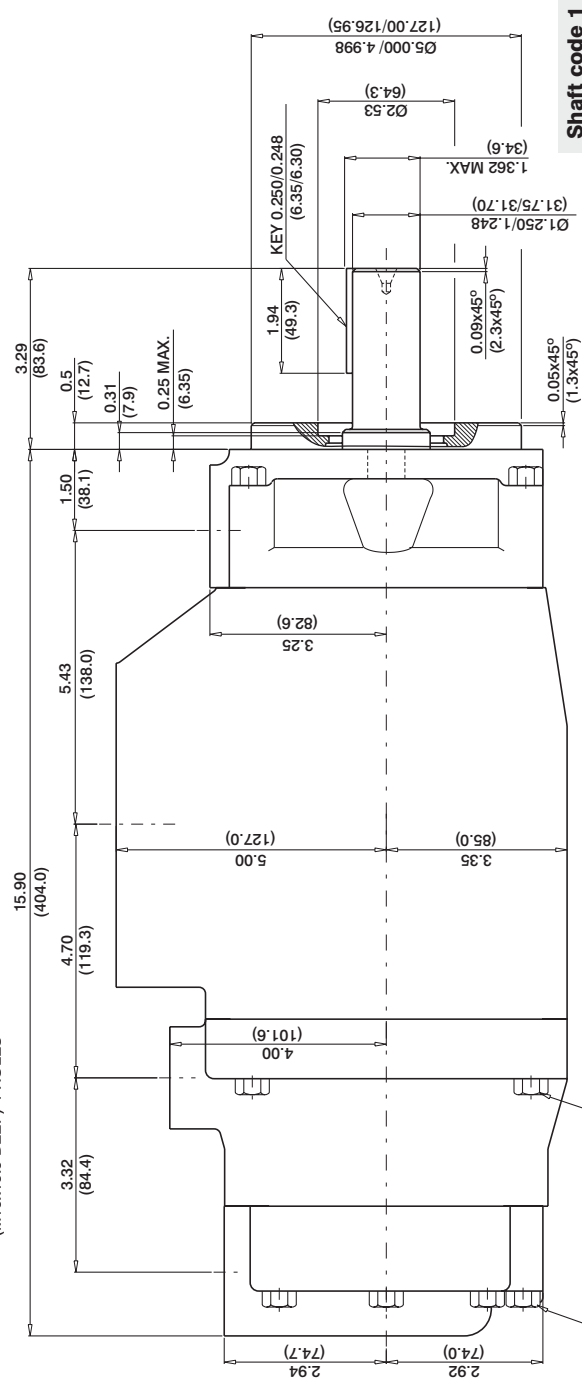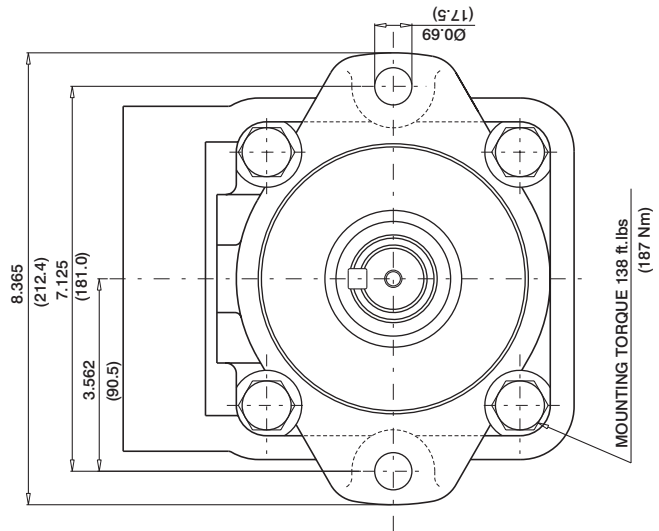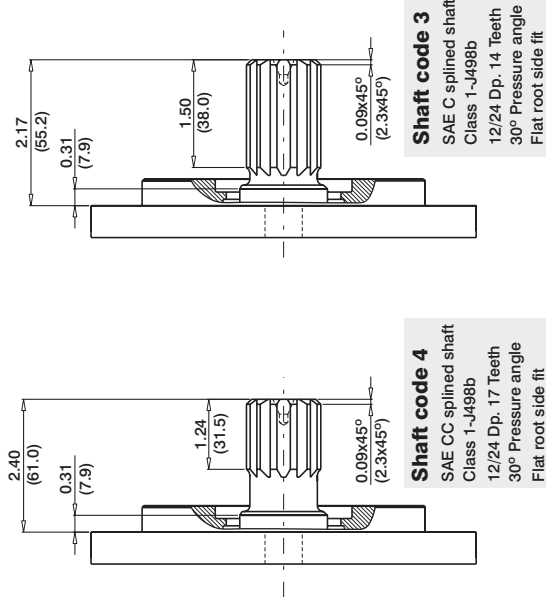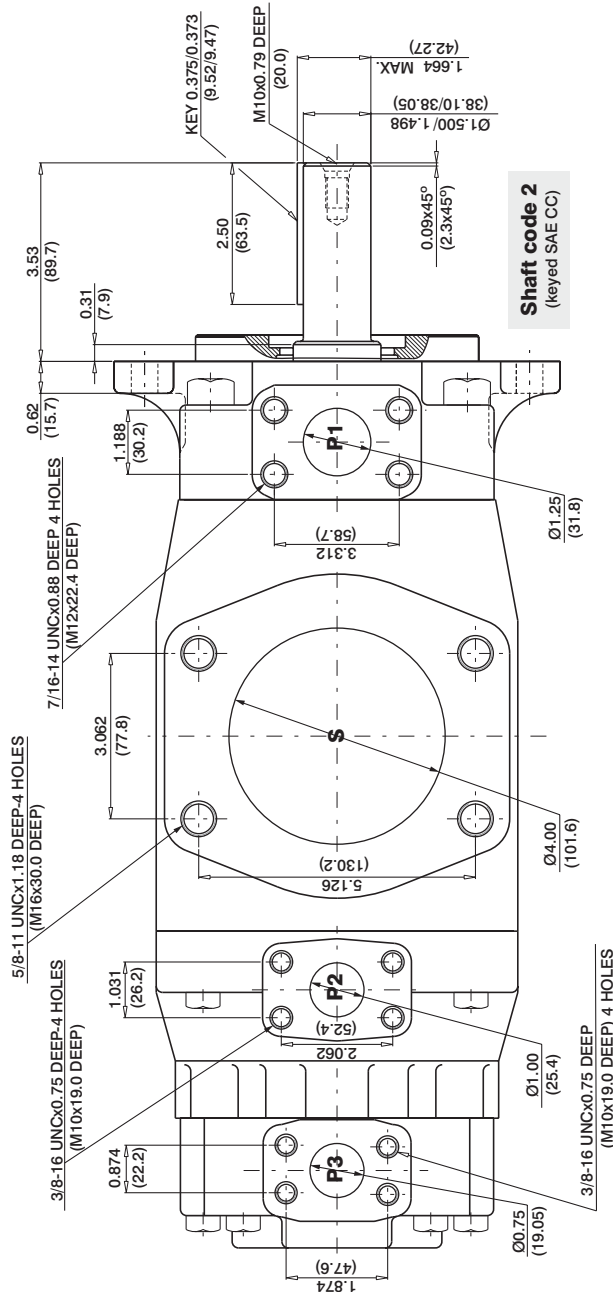

Shaft torque limits in ³ /rev x psi (ml/rev x bar)	
Shaft	Vp x p max. (P1+P2+P3)
1	38299 (43240)
2	58901 (66500)
3	54027 (61200)
4	58901 (66500)

MOUNTING TORQUE 138 ft.lbs
 (187 Nm)

MOUNTING TORQUE 50 ft.lbs
 (68 Nm)

VT67DCC - B35 - 025 - 008 - 1 R 00 - A 1 - M1 - *

Series - SAE C 2 bolts
Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

B14 = 43.9 (2.68)	B31 = 99.1 (6.05)
B17 = 55.0 (3.36)	B35 = 113.4 (6.92)
B20 = 66.0 (4.03)	B38 = 120.6 (7.36)
B22 = 70.3 (4.29)	B42 = 137.5 (8.39)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 158.0 (9.64)

Cam ring for "P2" & "P3"

Volumetric displacement cm³/rev (in³/rev)

003 = 10.8(0.66)	017 = 58.3 (3.56)
005 = 17.2(1.05)	020 = 63.7 (3.89)
006 = 21.3 (1.30)	022 = 70.3 (4.29)
008 = 26.3 (1.61)	025 = 79.3 (4.84)
010 = 34.0 (2.08)	028 = 88.8 (5.42)
012 = 37.0 (2.26)	031 = 99.9 (6.10)
014 = 46.0 (2.81)	

Type of Shaft

- 1 - Keyed (no SAE)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)

Modifications

Mounting w/connection variables

4 bolts SAE flange J518

P1=1 1/4" - P2=1" - S=4"		
	UNC	METRIC
P3 = 1"	00	M0
P3 = 3/4"	01	M1

Seal class

- 1 = S1 (for minreal oil)
- 4 = S4(for fire resistant fluids)
- 5 = S5(for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise



OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	B14	2.68	43.93	20.92	79.50	19.18	72.9	17.81	67.7	3.46	2.6	27.77	20.7	47.03	35.1
	B17	3.36	55.07	26.16	99.4	24.41	92.8	23.04	87.6	3.77	2.8	33.88	25.3	57.71	43.1
	B20	4.03	66.05	31.39	119.3	29.64	112.6	28.27	107.4	4.07	3.0	39.98	29.8	68.39	51.0
	B22	4.29	70.31	33.43	127	31.69	120.4	30.32	115.2	4.19	3.1	42.37	31.6	72.57	54.1
	B24	4.95	81.13	38.57	146.6	36.82	139.9	35.45	134.7	4.49	3.3	48.36	36.1	83.06	62
	B28	5.49	89.98	42.8	162.6	41.06	156	39.69	150.8	4.74	3.5	53.30	39.8	91.7	68.4
	B31	6.05	99.16	47.18	179.3	45.43	172.6	42.06	167.4	4.99	3.7	58.41	43.6	100.63	75.1
	B35	6.92	113.42	53.93	204.9	52.18	198.3	50.81	193.1	5.39	4.0	66.29	49.5	114.42	85.4
	B38	7.36	120.63	57.35	217.9	55.61	211.3	54.24	206.1	5.59	4.2	70.28	52.4	121.42	90.6
	B42 ¹⁾	8.39	137.51	65.39	248.5	63.65	241.9	62.28	236.7	6.05	4.5	79.66	59.4	137.83	102.8
P2 & P3	045 ¹⁾	8.89	145.71	69.29	263.3	67.11	255.0	65.31	248.2	6.74	5.0	83.75	62.5	145.79	108.8
	050 ^{1,2)}	9.64	158.00	75.14	285.5	72.96	277.2	71.78	272.8	7.08	5.3	90.58	67.6	154.5	110.3
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)	
	003	0.66	10.82	5.14	19.53	3.85	14.63	--	--	2.11	1.6	8.45	6.3	--	--
	005	1.05	17.21	8.18	31.08	6.89	26.18	5.68	21.6	2.29	1.7	12.0	9.0	19.81	14.8
	006	1.30	21.31	10.13	38.49	8.84	33.59	7.63	29.0	2.4	1.8	14.28	10.7	23.79	17.7
	008	1.61	26.39	12.55	47.69	11.26	42.79	10.05	38.2	2.54	1.9	17.11	12.8	28.75	21.4
	010	2.08	34.09	16.22	61.64	14.93	56.73	13.71	52.1	2.76	2.1	21.38	15.9	36.22	27.0
	012	2.26	37.04	17.64	67.03	16.35	62.13	15.14	57.5	2.84	2.1	23.05	17.2	39.14	29.2
	014	2.81	46.06	21.88	83.14	20.59	78.24	19.37	73.6	3.09	2.3	27.99	20.9	47.78	35.6
	017	3.56	58.35	27.73	105.37	26.44	100.47	25.22	95.8	3.43	2.6	34.81	26.0	59.73	44.6
	020	3.89	63.76	30.34	115.29	29.05	110.39	27.84	105.8	3.58	2.7	37.86	28.2	65.07	48.5
	022 ⁴⁾	4.29	70.31	33.43	127.03	32.14	122.13	30.93	117.5	3.76	2.8	41.47	30.9	71.38	53.2
	025 ^{3,5)}	4.84	79.33	37.71	143.3	36.42	138.40	35.21	133.8	4.01	3.0	46.46	34.7	80.12	59.8
	028 ^{3,6)}	5.42	88.83	42.23	160.47	40.94	155.60	40.32	153.2	4.27	3.2	51.74	38.6	76.73	57.2
	031 ^{3,6)}	6.10	99.98	47.56	180.73	46.27	175.83	45.65	173.5	4.58	3.4	57.95	43.2	86.06	64.2

-- We do not recommend to use this 003 at 275 bar (4000 psi) and 1500 rpm since internal leakage is over 50% of theoretical flow.



1) 042-045-050 = 2200 RPM max. 2) 050=210 bar (3000 psi) max. int.

3) 025-028-031 = 2500 R.P.M. max. 4) 022= 275 bar max. int. 5) 025 = 240 bar max. int. 6) 028-031 = 210 bar (3000 psi) max. int.

INTERNAL LEAKAGE (TYPICAL)

NOISE LEVEL (TYPICAL)

VT67DCC- B31-022-022

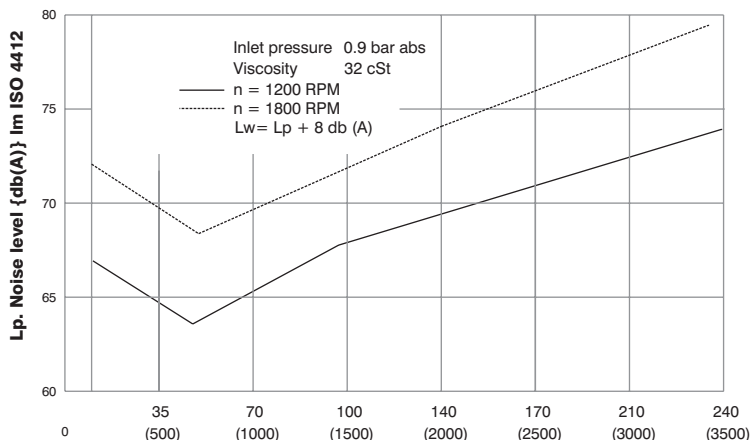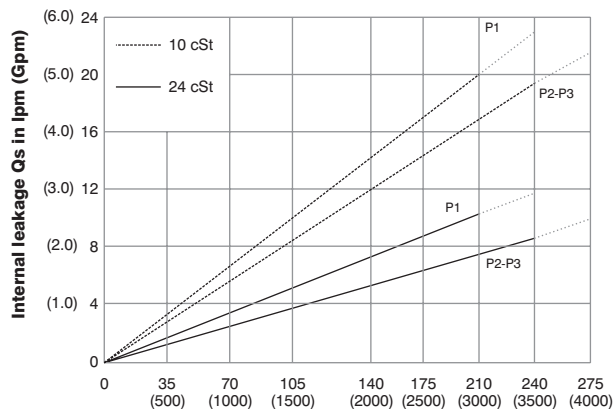

Pressure in bar (psi)



Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.

Pressure in bar (psi)

Triple pump noise level is given with each section discharging at the pressure noted on the curve.


HYDROMECHANICAL POWER LOSS (TYPICAL)

PERMISSIBLE RADIAL LOAD

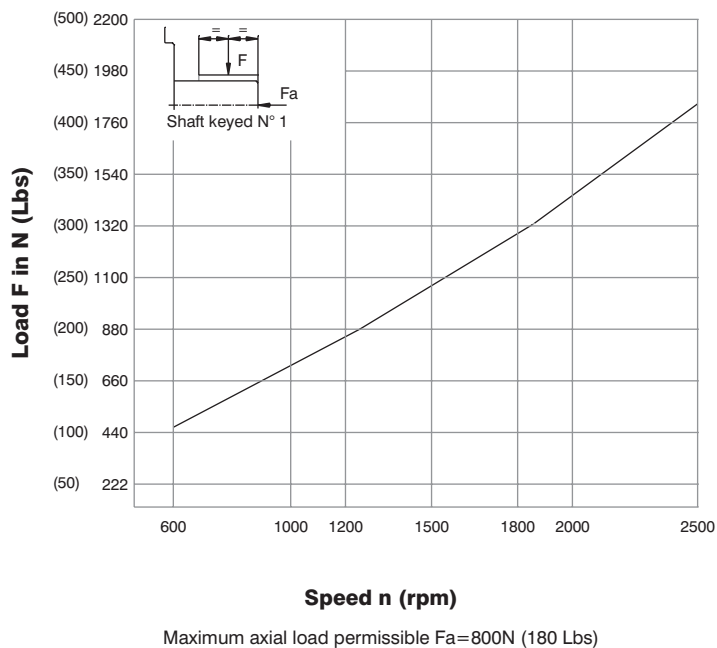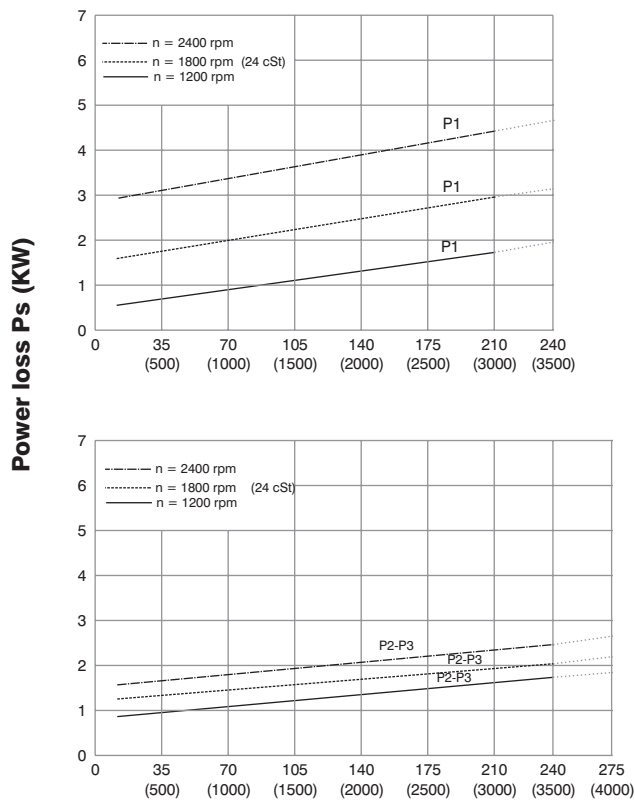

Pressure in bar (psi)

Total hydromechanical power loss is the sum of each section at its operating conditions.

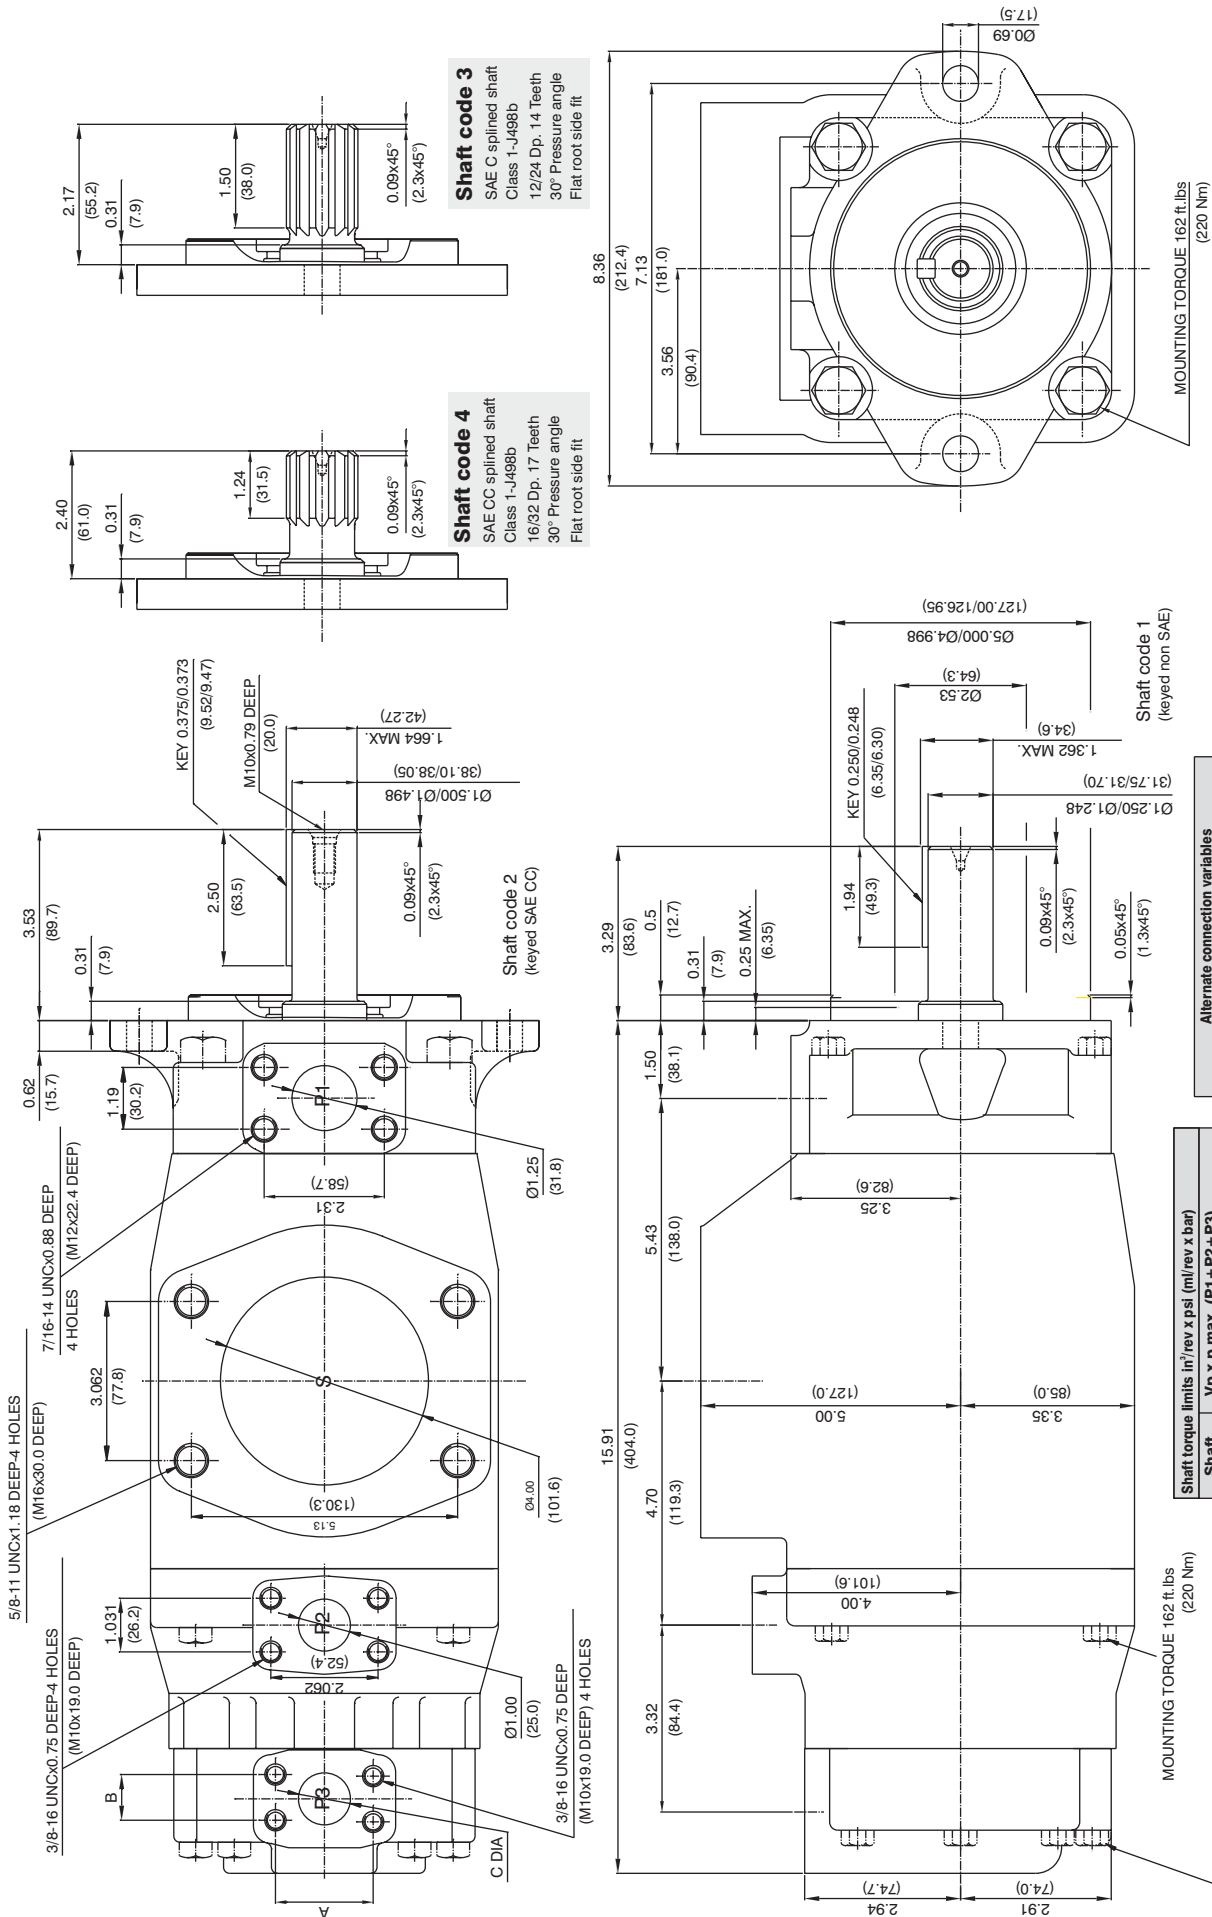

VT67DDCS - 045 - B31 - 012 - 1 R 00 - A 1 - M0 *

Series -SAE C 6 bolts
Mounting flange J744

Cam ring for "P1" & "P2"

Volumetric displacement cm³ /rev (in³ /rev)

B14 = 43.9 (2.68)	B31 = 99.1 (6.05)
B17 = 55.0 (3.36)	B35 = 113.4 (6.92)
B20 = 66.0 (4.03)	B38 = 120.6 (7.36)
B22 = 70.3 (4.29)	B42 = 137.5 (8.39)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Cam ring for "P3"

Volumetric displacement cm³ /rev (in³ /rev)

003 = 10.8 (0.66)	017 = 58.3 (3.56)
005 = 17.2 (1.05)	020 = 63.8 (3.89)
006 = 21.3 (1.30)	022 = 70.3 (4.29)
008 = 26.4 (1.61)	025 = 79.3 (4.84)
010 = 34.1 (2.08)	028 = 88.8 (5.42)
012 = 37.1 (2.26)	031 = 100.0 (6.10)
014 = 46.0 (2.81)	

Type of Shaft

- 1 - Keyed (SAE C)
- 2 - Keyed (SAE CC)
- 3 - Splined (SAE C)
- 4 - Splined (SAE CC)
- 5 - Keyed (non SAE)

Modifications

Mounting w/connection variables
4 bolts SAE flange J518

	P1 & P2= 1-1/4" S = 4"			
Type	UNC		METRIC	
P3	1"	3/4"	1"	3/4"
Code	00	01	M0	M1

Seal class

- 1 = S1 (for minreal oil)
- 4 = S4(for fire resistant fluids)
- 5 = S5(for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on shaft end)

- R - Clockwise
- L - Counter - clockwise


OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1 & P2	B14	2.68	43.9	20.92	79.50	19.18	72.9	17.81	67.7	3.46	2.6	27.77	20.7	47.03	35.1
	B17	3.36	55.0	26.16	99.4	24.41	92.8	23.04	87.6	3.77	2.8	33.88	25.3	57.71	43.1
	B20	4.03	66.0	31.39	119.3	29.64	112.6	28.27	107.4	4.07	3.0	39.98	29.8	68.39	51.0
	B22	4.29	70.3	33.43	127	31.69	120.4	30.32	115.2	4.19	3.1	42.37	31.6	72.57	54.1
	B24	4.95	81.1	38.57	146.6	36.82	139.9	35.45	134.7	4.49	3.3	48.36	36.1	83.06	62
	B28	5.49	89.9	42.8	162.6	41.06	156	39.69	150.8	4.74	3.5	53.30	39.8	91.7	68.4
	B31	6.05	99.1	47.18	179.3	45.43	172.6	42.06	167.4	4.99	3.7	58.41	43.6	100.63	75.1
	B35	6.92	113.4	53.93	204.9	52.18	198.3	50.81	193.1	5.39	4.0	66.29	49.5	114.42	85.4
	B38	7.36	120.6	57.35	217.9	55.61	211.3	54.24	206.1	5.59	4.2	70.28	52.4	121.42	90.6
	B42 ¹⁾	8.39	137.5	65.39	248.5	63.65	241.9	62.28	236.7	6.05	4.5	79.66	59.4	137.83	102.8
P3	045 ¹⁾	8.89	145.7	69.29	263.3	67.11	255.0	65.31	248.2	6.74	5.0	83.75	62.5	145.79	108.8
	050 ^{1,2)}	9.64	157.9	75.14	285.5	72.96	277.2	71.78	272.8	7.08	5.3	90.58	67.6	157.9	118.3
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)	
	003	0.66	10.8	5.14	19.53	3.85	14.63	--	--	2.11	1.6	8.45	6.3	--	--
	005	1.05	17.2	8.18	31.08	6.89	26.18	5.68	21.6	2.29	1.7	12.0	9.0	19.81	14.8
	006	1.30	21.3	10.13	38.49	8.84	33.59	7.63	29.0	2.4	1.8	14.28	10.7	23.79	17.7
	008	1.61	26.4	12.55	47.69	11.26	42.79	10.05	38.2	2.54	1.9	17.11	12.8	28.75	21.4
	010	2.08	34.1	16.22	61.64	14.93	56.73	13.71	52.1	2.76	2.1	21.38	15.9	36.22	27.0
	012	2.26	37.1	17.64	67.03	16.35	62.13	15.14	57.5	2.84	2.1	23.05	17.2	39.14	29.2
	014	2.81	46.0	21.88	83.14	20.59	78.24	19.37	73.6	3.09	2.3	27.99	20.9	47.78	35.6
	017	3.56	58.3	27.73	105.37	26.44	100.47	25.22	95.8	3.43	2.6	34.81	26.0	59.73	44.6
	020	3.89	63.8	30.34	115.29	29.05	110.39	27.84	105.8	3.58	2.7	37.86	28.2	65.07	48.5
	022 ⁴⁾	4.29	70.3	33.43	127.03	32.14	122.13	30.93	117.5	3.76	2.8	41.47	30.9	71.38	53.2
	025 ^{3,5)}	4.84	79.3	37.71	143.3	36.42	138.40	35.21	133.8	4.01	3.0	46.46	34.7	80.12	59.8
	028 ^{3,6)}	5.42	88.8	42.23	160.47	40.94	155.60	40.32	153.2	4.27	3.2	51.74	38.6	76.73	57.2
	031 ^{3,6)}	6.10	100.0	47.56	180.73	46.27	175.83	45.65	173.5	4.58	3.4	57.95	43.2	86.06	64.2

- We do not recommend to use this 003 at 275 bar (4000 psi) and 1500 rpm since internal leakage is over 50 of theoretical flow.


1) 042-045-050 = 2200 RPM max. 2) 050=210 bar (3000 psi) max. int. 3) 025-028-031 = 2500 R.P.M. max. 4) 022= 275 bar max. int, 5) 025 = 240 bar max. int, 6) 028-031 = 210 bar (3000 psi) max. int.

INTERNAL LEAKAGE (TYPICAL)

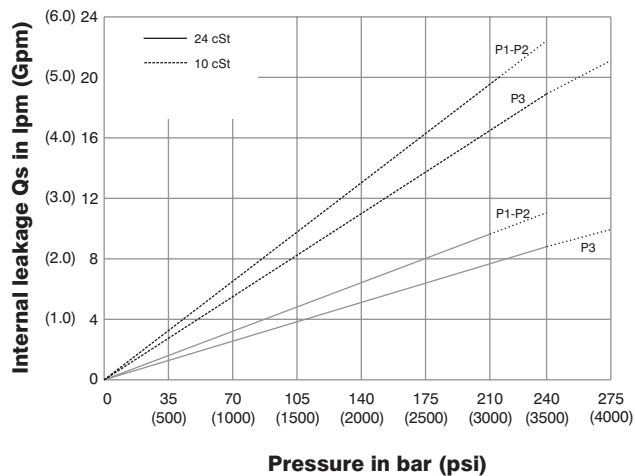


Do not operate pump for more than 5 seconds at any speed or viscosity if internal leakage is more than 50 of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL) VT67DDCS- B31-B31-022

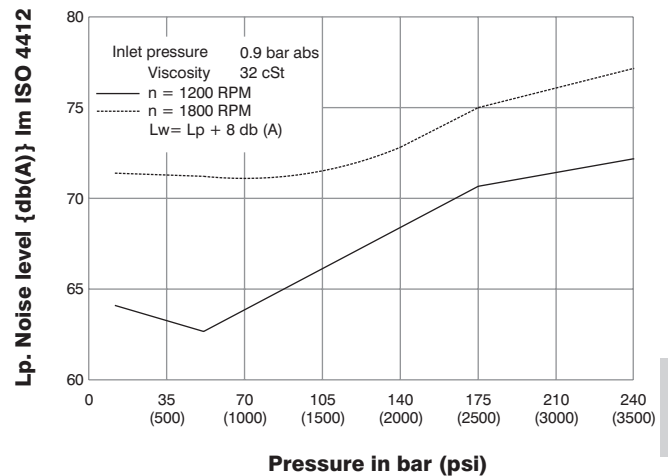


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

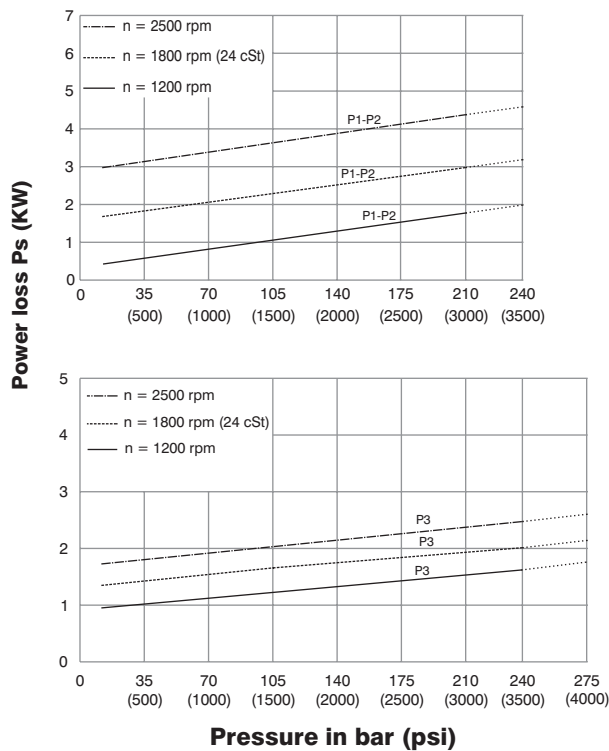

Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD




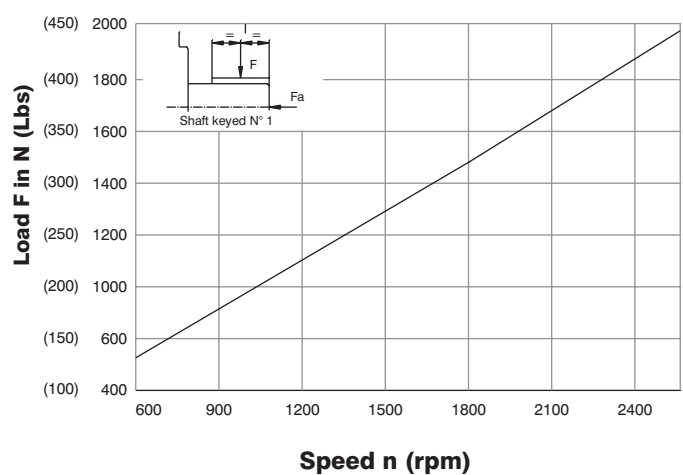


Maximum permissible axial load $F_a = 1200$ N (270 Lbs)

HIGH PERFORMANCE VANE PUMP VT67DDCS



TP

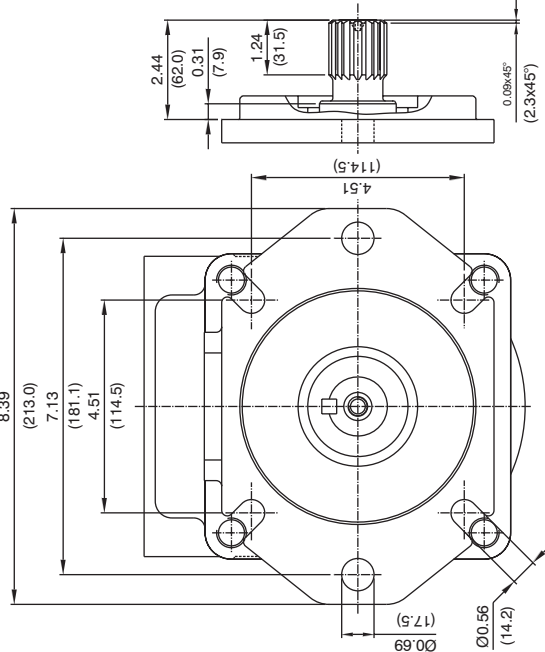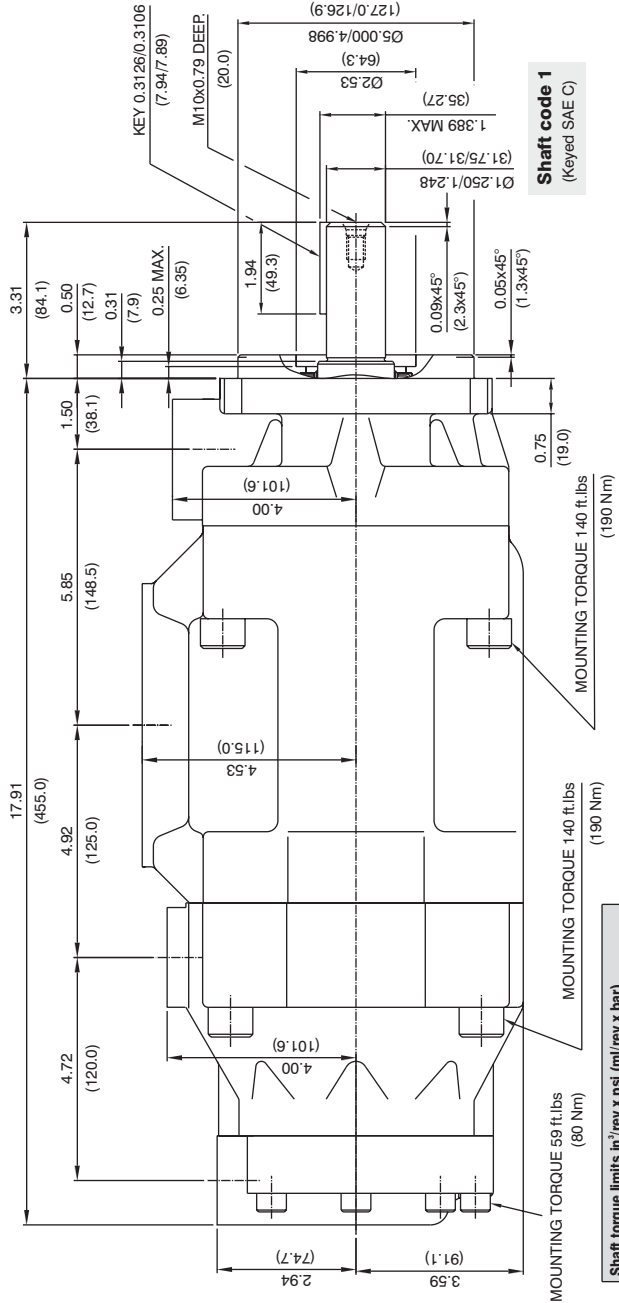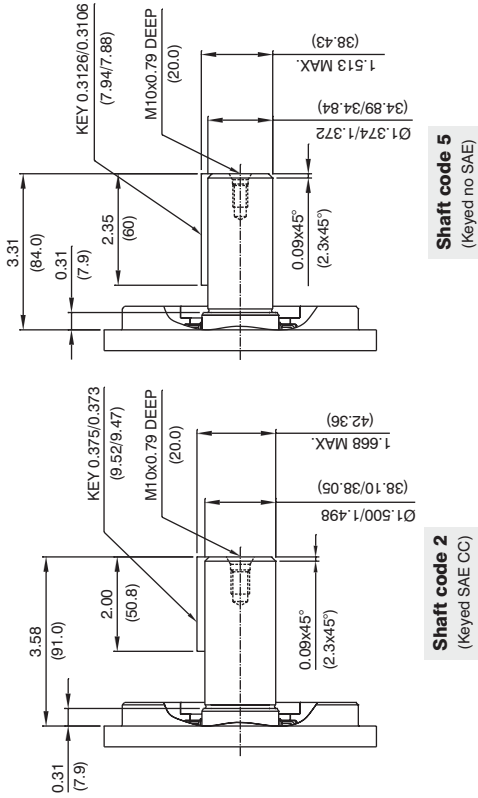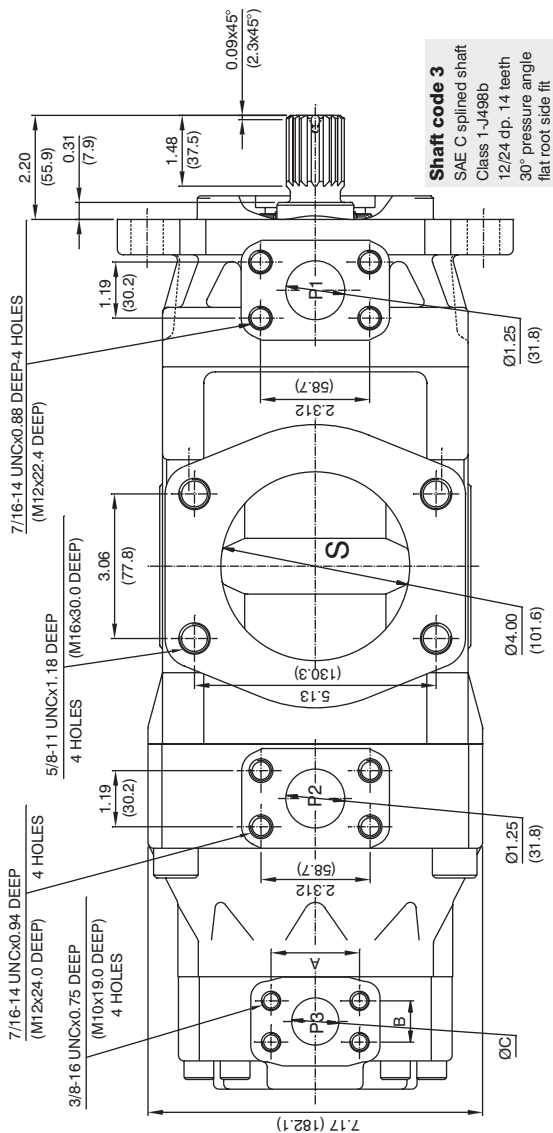

Shaft	Vp x p max. (P1+P2+P3)
1	38299 (43240)
2	64044 (72378)
3	54207 (61200)
4	58902 (66567)
5	49247 (55649)

Port	Alternate port		
	Code	A	B
P3	00 - M0	2.063 (52.4)	1.031 (26.2)
	01 - M1	1.874 (47.6)	0.874 (22.2)

VT67EDB - 062 - 035 - B10 - 1 R 00 - A 1 - P - 1 - *

Series-250 B4HW
ISO 3019-2 Mounting flange J744c

Cam ring for "P1"

Volumetric displacement cm³/rev (in³/rev)

042 = 1 ³ 2.3 (8.07)	062 = 196.7 (12.00)
045 = 142.4 (8.69)	066 = 21 ³ .3 (1 ³ .02)
050 = 158.5 (9.67)	072 = 227.1 (1 ³ .86)
052 = 164.8 (10.06)	085 = 269.8 (16.46)
057 = 180.7 (11.02)	

Cam ring for "P2"

Volumetric displacement cm³/rev (in³/rev)

*014/B14 = 47.6 (2.90)	0 ³ 5/B ³ 5 = 111.0 (6.77)
017/B17 = 58.2 (3.55)	0 ³ 8/B ³ 8 = 120.3 (7.34)
020/B20 = 66.0 (4.03)	042/B42 = 1 ³ 6.0 (8.30)
024/B24 = 79.5 (4.85)	045/B45 = 145.7 (8.89)
028/B28 = 89.7 (5.47)	050/B50 = 158.0 (9.64)
0 ³ 1/B ³ 1 = 98.3 (6.00)	061/B61 = 190.5 (11.62)

*0' - Uni - directional 'B' - Bi - directional

Cam ring for "P3"

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.7 (0.35)	B09 = 28.0 (1.71)
B03 = 9.8 (0.60)	B10 = 1.8 (1.94)
B04 = 12.8 (0.78)	B11 = 4.9 (2.13)
B05 = 15.9 (0.97)	B12 = 40.9 (2.50)
B06 = 19.8 (1.21)	B14 = 45.1 (2.75)
B07 = 22.5 (1.37)	B15 = 50.0 (3.05)
B08 = 24.9 (1.52)	

Modifications

Mounting w/connection variables

4 bolts SAE flange
(J518c) Metric thread
1 = P³ = 3/4" SAE

Mounting (pump)

P= Pedestal mounting
F= Face mounting

Seal class

1 - S1 (for mineral oil)
4 - S4(for fire resistant fluids)
5 - S5(for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on the shaft)

R - Clockwise
L - Counter - clockwise

Type of Shaft

1 - Keyed (G45N-ISO 3019-2)

TP

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
		in ³ /rev	cm ³ /rev	p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
				gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.3	62.92	237.8	60.37	228.2	58.52	221.2	8.09	6.03	78.44	58.49	133.80	99.78
	045	8.69	142.4	67.72	256.0	65.17	246.3	63.32	239.4	8.37	6.24	84.04	62.67	143.60	107.08
	050	9.67	158.5	75.38	285.0	72.83	275.3	70.98	268.3	8.82	6.58	92.97	69.30	159.24	118.7
	052	10.06	164.8	78.37	296.2	75.82	286.3	73.97	279.6	8.99	6.70	96.47	71.94	165.36	121.31
	057	11.02	180.7	71.70	325.3	69.07	261.1	80.63	304.8	9.40	7.00	114.30	85.14	172.10	128.30
	062	12.00	196.7	93.54	353.6	90.99	344.0	89.14	337.0	9.88	7.36	114.17	84.00	196.34	146.41
	066	13.02	213.3	101.44	383.4	98.89	373.8	97.04	366.8	10.34	7.71	123.38	92.01	212.46	158.43
	072	13.86	227.1	108.00	408.2	105.45	400.0	103.60	391.6	10.72	8.00	131.04	97.72	225.86	168.42
P2	085 ^{1,2)}	16.40	268.7	127.79	483.0	126.13	467.7	--	--	11.66	8.70	87.56	65.30	--	--
	014	2.90	47.6	22.64	85.0	20.46	77.4	18.8	71.1	4.02	2.99	29.31	21.85	49.34	36.79
	017	3.55	58.2	23.1	87.3	20.6	78.0	18.99	71.8	3.35	2.5	29.77	22.2	49.62	37.0
	020	4.03	66.0	31.39	118.6	29.29	101.4	27.57	104.2	4.53	3.38	39.52	29.47	67.21	50.11
	024	4.85	79.5	37.81	142.8	35.63	134.6	33.99	128.5	4.91	3.66	47.02	35.06	80.32	59.89
	028	5.47	89.7	42.66	161.3	40.48	153.0	38.84	146.8	5.19	3.87	52.68	39.28	90.23	67.28
	031	6.00	98.3	46.75	176.7	44.57	168.5	42.93	162.3	5.43	4.09	57.45	42.84	98.58	73.51
	035	6.77	111.0	52.79	199.6	50.61	191.3	48.97	184.1	5.78	4.31	64.50	48.09	110.91	82.70
	038	7.34	120.3	57.21	216.3	55.03	208.1	53.39	201.8	6.04	4.50	69.66	51.94	111.94	83.47
	042 ³⁾	8.30	136.0	64.68	244.5	62.50	236.3	60.86	230.1	6.47	4.83	78.37	58.44	135.19	100.81
	045 ³⁾	8.89	145.7	69.29	261.9	67.11	253.7	65.47	247.5	6.74	5.02	83.75	62.45	144.61	107.83
	050 ^{3,4)}	9.64	158.0	75.14	284.1	72.96	275.8	71.78	271.3	7.08	5.27	90.58	67.54	134.54	100.32
	061 ^{3,5)}	11.62	190.5	75.6	285.8	73.54	278.0	--	--	7.37	5.50	97.49	72.69	--	--
P3				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
	B02	0.35	5.7	2.76	10.4	2.33	8.8	1.80	6.8	0.74	0.55	4.02	2.99	8.10	6.40
	B03	0.60	9.8	4.66	17.6	4.23	15.9	3.70	14.0	0.85	0.63	6.24	4.65	12.93	10.25
	B04	0.78	12.8	6.09	23.0	5.66	21.4	5.13	19.4	0.94	0.70	7.90	5.89	16.55	13.13
	B05	0.97	15.9	7.56	28.6	7.13	26.9	6.60	25.0	1.02	0.76	9.62	7.17	20.29	16.12
	B06	1.21	19.8	9.42	35.6	8.99	33.9	8.46	32.0	1.13	0.84	11.79	8.79	25.00	19.88
	B07	1.37	22.5	10.70	40.4	10.27	38.8	9.74	36.8	1.20	0.89	13.29	9.91	28.26	22.47
	B08	1.52	24.9	11.84	44.7	11.41	43.1	10.88	41.1	1.27	0.94	14.62	10.90	31.15	24.78
	B09	1.71	28.0	13.31	50.3	12.87	48.6	12.35	47.0	1.36	1.01	16.35	12.19	34.92	27.77
	B10	1.94	31.8	15.12	57.2	14.69	55.5	14.16	53.5	1.46	1.11	18.45	13.75	39.48	31.42
	B11 ⁶⁾	2.13	34.9	16.64	62.9	16.19	61.2	15.68	59.3	1.55	1.15	20.17	15.04	43.22	32.22
	B12 ⁶⁾	2.50	40.9	19.50	73.7	19.07	72.1	18.54	70.1	1.72	1.28	23.55	17.56	50.58	37.71
	B14 ⁶⁾	2.75	45.1	21.40	80.8	20.95	79.2	20.44	77.0	1.83	1.36	25.80	19.23	55.48	41.37
	B15 ⁶⁾	3.05	50.0	23.78	89.8	23.35	88.3	22.88	86.5	1.97	1.47	28.55	21.28	57.35	42.76


1) 085 = 75 bar (1087 psi) cont. 2) 085 = 90 bar (1300 psi) max. int. 3) 042-045-050-061-085 = 2000 RPM max.

4) 050=210 bar (3000 psi) max. int.

5) 061 = 120 bar (1740 psi) max. int. 061 = 80 bar (1160 psi) cont.


6) B11-B12-B14 = 300 bar (4350 psi) & B15 = 280 bar (4060 psi) max. int. And Max. Speed = 3000 rpm

INTERNAL LEAKAGE (TYPICAL)

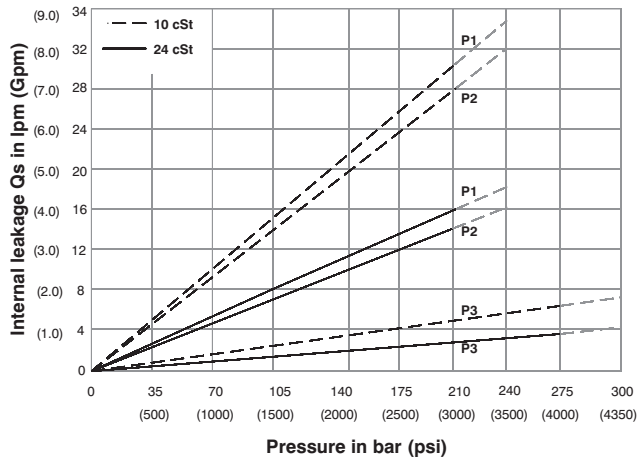


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50% of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)

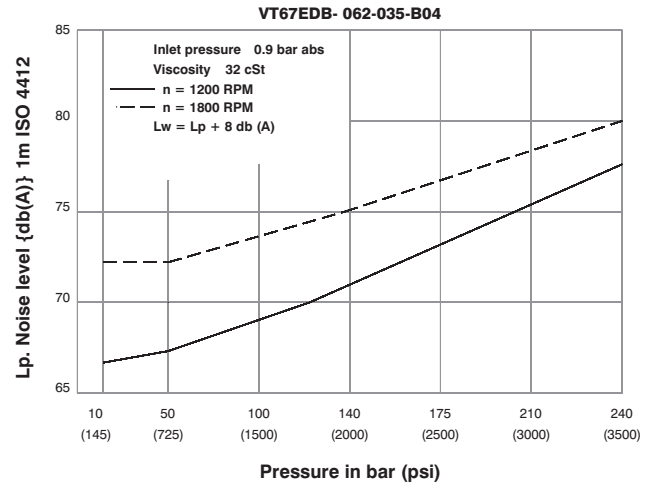


Triple pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)

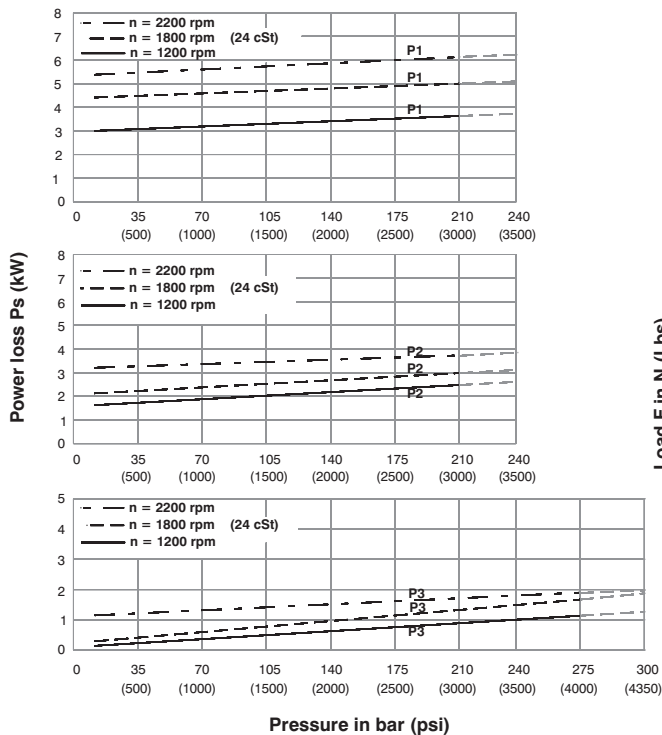



Total hydromechanical power loss is the sum of each section at its operating conditions

PERMISSIBLE RADIAL LOAD

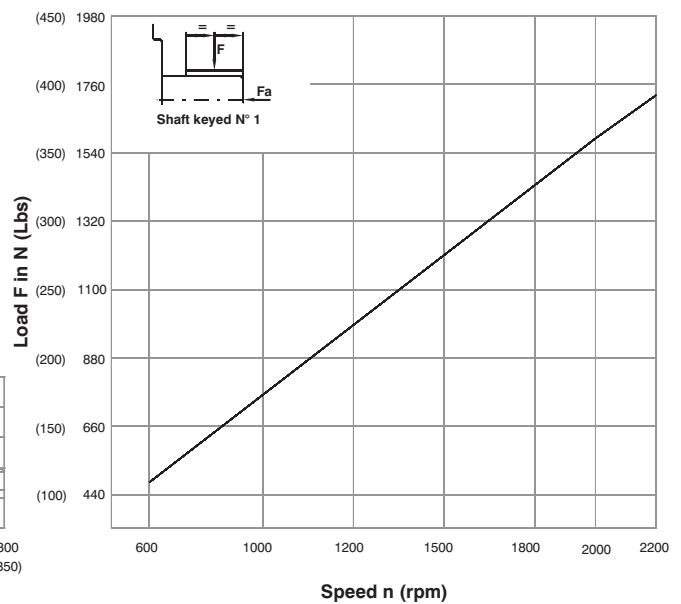

Maximum axial load permissible $F_a = 2000 \text{ N}$ (449 Lbs)

Shaft torque limits in ³ /rev x psi (ml/rev x bar)	
Shaft	Vp x p max. (P1 + P2 + P3)
1	101506 (114715)

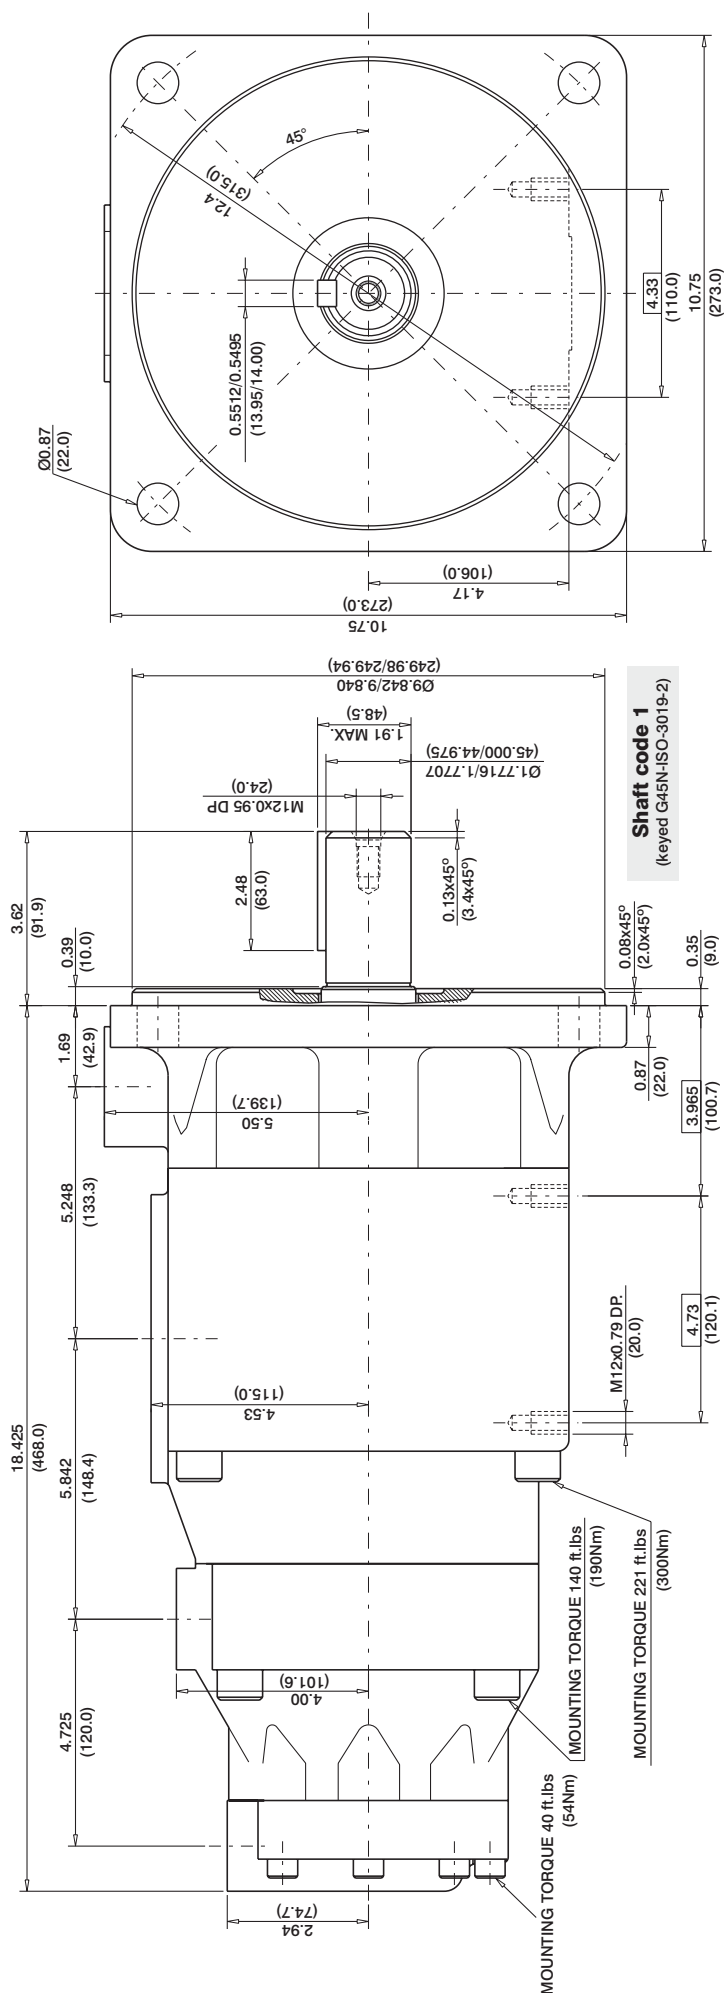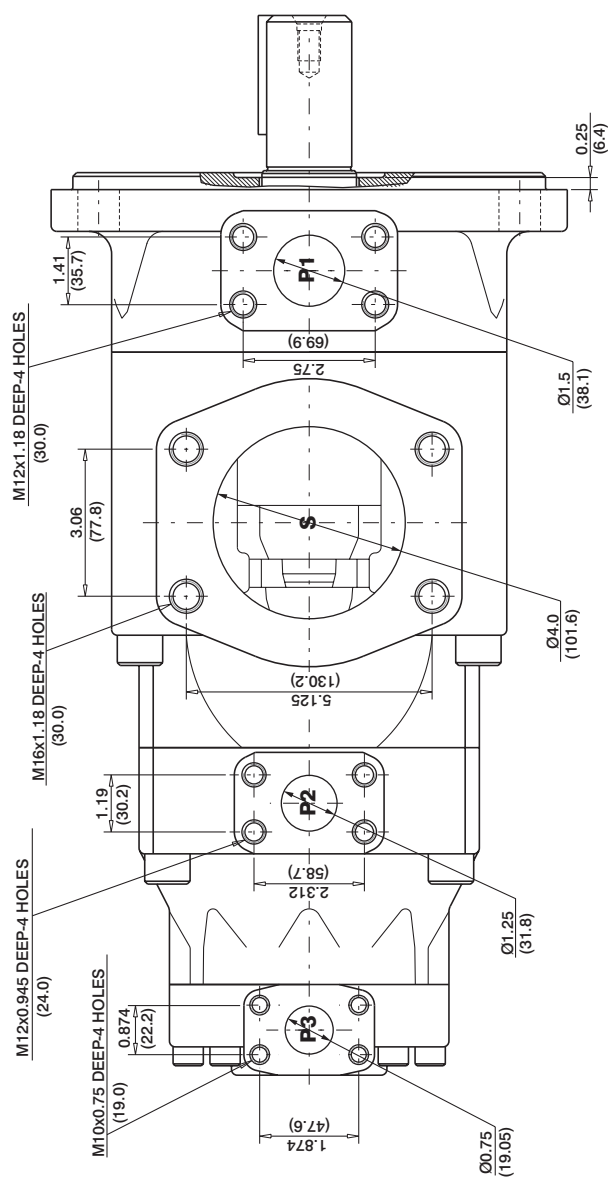

VT67EDC or T67EDCS - 062 - B35 - 010 - 1 R 00 - A 1 - M1 - *

T67EDC Series-250 B4HW
ISO 4 bolts 3019-2 Mounting flange
T67EDCS Series - SAE E
Mounting flange J744

Cam ring for "P1"

Volumetric displacement cm^3/rev (in^3/rev)

042 = 132.3 (8.07) 057 = 183.2 (11.18)
045 = 142.6 (8.70) 062 = 196.6 (12.00)
050 = 158.5 (9.67) 066 = 213.0 (13.00)
052 = 163.9 (10.00) 072 = 227.2 (13.86)
054 = 170.9 (10.43) 085 = 269.8 (16.40)

Cam ring for "P2"

Volumetric displacement cm^3/rev (in^3/rev)

B14 = 43.9 (2.68) B31 = 99.1 (6.05)
B17 = 55.0 (3.36) B35 = 113.4 (6.92)
B20 = 66.0 (4.03) B38 = 120.6 (7.36)
B22 = 70.3 (4.29) B42 = 137.5 (8.39)
B24 = 81.1 (4.95) 045 = 145.7 (8.89)
B28 = 89.9 (5.49) 050 = 158.0 (9.64)

Cam ring for "P3"

Volumetric displacement cm^3/rev (in^3/rev)

003 = 10.8 (0.66) 017 = 58.3 (3.56)
005 = 17.2 (1.05) 020 = 63.7 (3.89)
006 = 21.3 (1.30) 022 = 70.3 (4.29)
008 = 26.3 (1.61) 025 = 79.3 (4.84)
010 = 34.0 (2.08) 028 = 88.8 (5.42)
012 = 37.0 (2.26) 031 = 100 (6.10)
014 = 46.0 (2.81)

Modifications

Mounting w/connection variables

4 bolts SAE flanges J518

P1=1-1/2" P2=1-1/4" S=4"			
Type	P3	UNC	Metric
T67EDC	1"		M0
T67EDC	3/4"		M1
T67EDCS	1"	00	M0
T67EDCS	3/4"	01	M1

Seal class

1 = S1 (for mineral oil)
4 = S4 (for fire resistant fluids)
5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page CI-1-4,5)

00 = Standard

Direction of rotation (view on the shaft)

R - Clockwise
L - Counter - clockwise

Type of Shaft T67EDC

1 - Keyed (G45N-ISO 3019-2)

Type of Shaft T67EDCS

2 - Keyed (SAE D&E)
3 - Splined (SAE D&E)

OPERATING CHARACTERISTICS - TYPICAL (24 cST) (Input power p (KW) for one cartridge only)


Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1800 rpm						Input power p & n = 1800 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in^3/rev	cm^3/rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
P1	042	8.07	132.3	62.92	239.1	60.37	229.4	58.52	222.4	8.09	6.03	78.44	58.49	133.80	99.8
	045	8.70	142.5	67.72	257.3	65.17	247.6	63.32	240.6	8.37	6.24	84.04	62.67	143.60	107.1
	050	9.67	158.5	75.38	286.3	72.83	276.8	70.98	269.7	8.82	6.58	92.97	69.30	159.24	118.8
	052	10.00	163.9	78.37	297.8	75.82	288.1	73.97	281.1	8.99	6.70	96.47	71.94	165.36	123.4
	054	10.43	170.9	81.27	308.8	78.72	299.1	76.87	292.1	9.17	6.84	99.75	74.40	177.46	132.4
	057	11.18	183.2	87.12	331.1	84.57	321.4	82.72	314.3	9.51	7.09	106.57	79.5	189.84	141.6
	062	12.00	196.7	93.54	355.5	90.99	345.8	89.14	338.7	9.88	7.37	114.17	85.2	196.34	146.5
	066	13.00	213.0	101.44	385.5	98.89	375.8	97.04	368.8	10.34	7.71	123.38	92.01	212.46	158.5
	072	13.86	227.1	108.00	410.4	105.45	400.7	103.60	393.7	10.72	8.00	131.04	97.8	225.86	168.5
	085 ¹⁾	16.40	268.7	127.79	485.6	126.13	479.3	--	--	11.88	8.86	101.66	75.8	--	--
P2				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 250 bar (3630 psi)	
	B14	2.68	43.93	20.92	79.50	19.18	72.88	17.81	67.7	3.46	2.6	27.77	20.7	47.03	35.1
	B17	3.36	55.07	26.16	99.41	24.41	92.76	23.04	87.6	3.77	2.8	33.88	25.3	57.71	43.1
	B20	4.03	66.05	31.39	119.28	29.64	112.63	28.27	107.4	4.07	3.0	39.98	29.8	68.39	51.0
	B22	4.29	70.31	33.43	127.03	31.69	120.42	30.32	115.2	4.19	3.1	42.37	31.6	72.57	54.1
	B24	4.95	81.13	38.50	146.30	36.82	139.92	35.45	134.7	4.49	3.3	48.36	36.1	83.06	62.0
	B28	5.49	89.98	42.80	162.64	41.06	156.03	39.69	150.8	4.74	3.5	53.3	39.8	91.7	68.4
	B31	6.05	99.16	47.18	179.28	45.43	172.63	44.06	167.4	4.99	3.7	58.41	43.6	100.63	75.1
	B35	6.92	113.42	53.93	204.93	52.18	198.28	50.81	193.1	5.39	4.0	66.29	49.5	114.42	85.4
	B38	7.36	120.63	57.30	217.74	55.61	211.32	54.24	206.1	5.59	4.2	70.28	52.4	121.42	90.6
	B42 ²⁾	8.39	137.51	65.30	248.14	63.35	240.73	62.28	236.7	6.05	4.5	79.66	59.4	137.83	102.8
	045 ²⁾	8.89	145.71	69.20	262.96	67.11	255.02	65.31	248.2	6.74	5.0	83.75	62.5	145.79	108.8
	050 ^{2,3)}	9.64	158	75.14	285.53	72.96	277.2	71.78	272.8	7.08	5.3	90.58	67.6	134.5	100.3
P3				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 275 bar (4000 psi)	
	003	0.66	10.82	5.14	19.53	3.85	14.6	--	--	2.11	1.6	8.45	6.3	--	--
	005	1.05	17.21	8.18	31.08	6.89	26.2	5.68	21.6	2.29	1.7	12.0	9.0	19.81	14.8
	006	1.30	21.31	10.13	38.49	8.84	33.6	7.63	29.0	2.4	1.8	14.28	10.7	23.79	17.7
	008	1.61	26.39	12.55	47.69	11.26	42.8	10.05	38.2	2.54	1.9	17.11	12.8	28.75	21.4
	010	2.08	34.09	16.22	61.64	14.93	56.7	13.71	52.1	2.76	2.1	21.38	15.9	36.22	27.0
	012	2.26	37.04	17.64	67.03	16.35	62.1	15.14	57.5	2.84	2.1	23.05	17.2	39.14	29.2
	014	2.81	46.06	21.88	83.14	20.59	78.2	19.37	73.6	3.09	2.3	27.99	20.9	47.78	35.6
	017	3.56	58.35	27.73	105.37	26.44	100.5	25.22	95.8	3.43	2.6	34.81	26.0	59.73	44.6
	020	3.89	63.76	30.34	115.29	29.05	110.4	27.84	105.8	3.58	2.7	37.86	28.2	65.07	48.5
	022 ⁵⁾	4.29	70.31	33.43	127.03	32.14	122.1	30.93	117.5	3.76	2.8	41.47	30.9	71.38	53.2
	025 ^{4,6)}	4.84	79.33	37.71	143.30	36.42	138.4	35.21	133.8	4.01	3.0	46.46	34.7	80.12	59.8
	028 ^{4,7)}	5.42	88.83	42.23	160.47	40.94	155.6	40.32	153.2	4.27	3.2	51.74	38.6	76.73	57.2
	031 ^{4,7)}	6.10	99.98	47.56	180.73	46.27	175.8	45.65	173.5	4.58	3.4	57.95	43.2	86.06	64.2

-- We do not recommend to use this 003 at 275 bar (4000 psi) and 1500 rpm since internal leakage is over 50% of theoretical flow.

1) 085 = 90 bar (1300 psi) max. int. 2) 042-045-050 = 2200 RPM max. 3) 050=210 bar (3000 psi) max. int.


4) 025-028-031 = 2500 R.P.M. max. 5) 022= 275 bar max. int. 6) 025 = 240 bar max. int. 7) 028-031 = 210 bar (3000 psi) max. int.

INTERNAL LEAKAGE (TYPICAL)

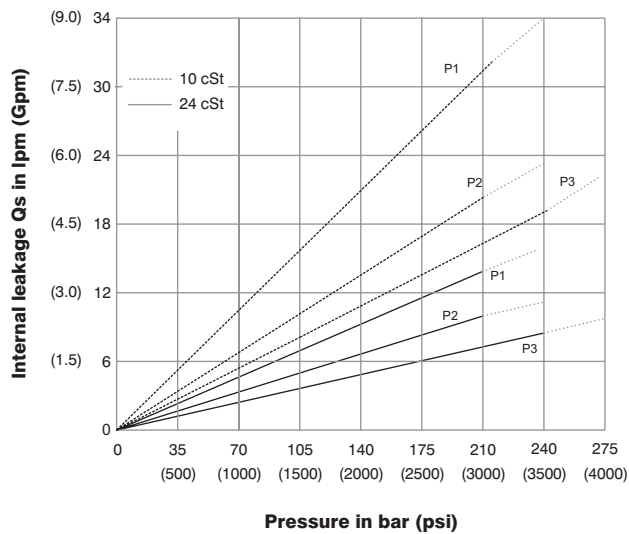

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow.
Total leakage is the sum of each section loss at its operating conditions.




NOISE LEVEL (TYPICAL) VT67EDCS- 062-B35-022

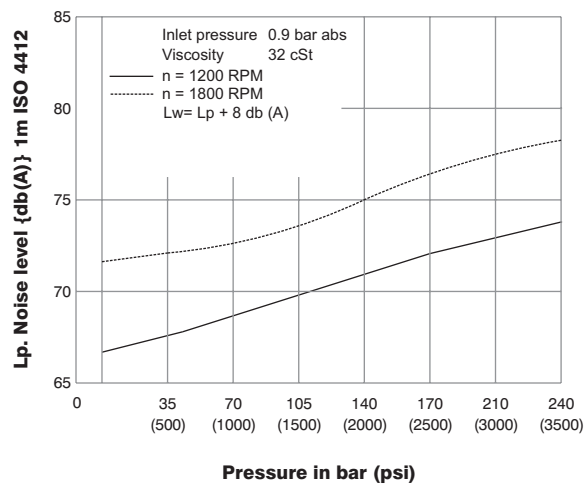

Triple pump noise level is given with each section discharging at the pressure noted on the curve.


TP

HYDROMECHANICAL POWER LOSS (TYPICAL)

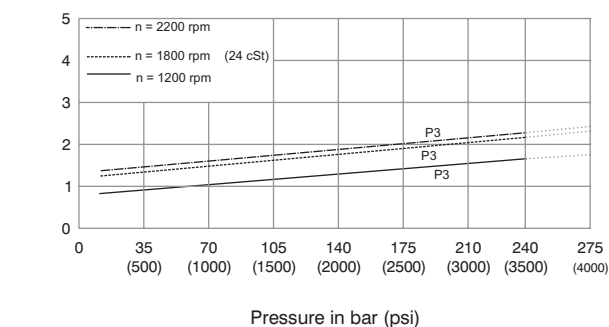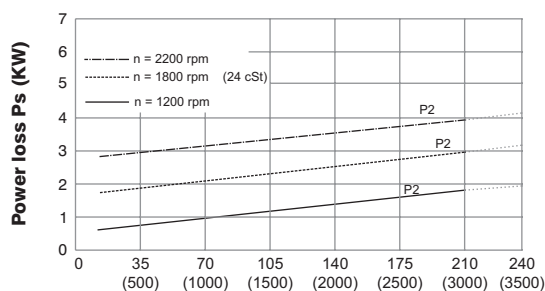
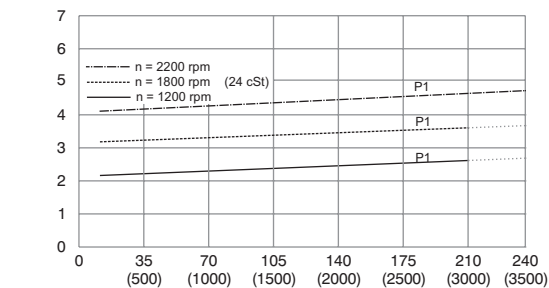


Total hydromechanical power loss is the sum of each section at its operating conditions

PERMISSIBLE RADIAL LOAD

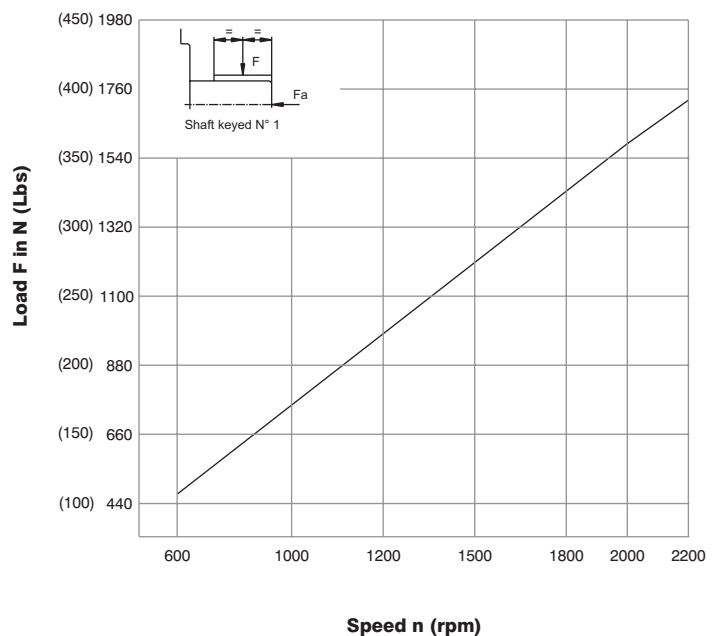

Maximum permissible axial load $F_a = 2000 \text{ N}$ (449 Lbs)

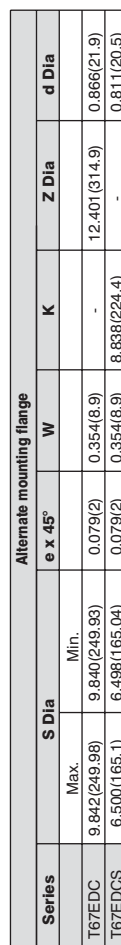

Shaft	Shaft torque limits in ³ /rev x psi (ml/rev x bar)
1	101506 (114715)
2	104818 (118457)
3	112312 (126927)